


MR PN 6

Maximum capacity table

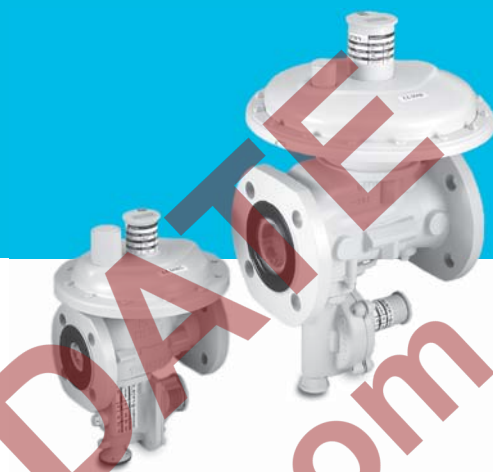

MR 25 PN 6 (external impulse)

Outlet pressure [mbar]	Accuracy class	Inlet pressure [mbar]							
		100	500	1000	2000	3000	4000	5000	6000
22	AC10	25	56	82	114	166	242	296	352
50	AC10	21	65	92	136	184	236	289	342
100	AC10	-	60	96	152	218	275	330	407
300	AC10	-	45	83	149	210	246	324	405
100	AC5	-	42	69	97	137	203	247	286
300	AC5	-	31	51	84	130	178	211	275

Nm³/h

MR 50 PN 6

Outlet pressure [mbar]	Accuracy class	Inlet pressure [mbar]							
		100	500	1000	2000	3000	4000	5000	6000
22	AC10	96	261	393	582	676	702	702	702
50	AC10	66	222	367	590	656	721	721	721
100	AC10	-	205	330	481	618	687	687	714
300	AC10	-	156	259	428	570	739	810	955
100	AC5	-	137	206	316	407	460	560	618
300	AC5	-	97	194	324	405	493	648	778

Nm³/h

Your contacts

Germany
Elster GmbH
Steinern Str. 19 - 21
55252 Mainz-Kastel
T +49 6134 605 0
F +49 6134 605 223
www.elster-instromet.com
info@elster-instromet.com

Belgium
Elster-Instromet N.V.
Rijkmakerlaan 9
2910 Essen
T +32 3 670 0700
F +32 3 667 6940
www.elster-instromet.com
info@elster-instromet.com

Singapore
Elster-Instromet Sdn. Bhd. (Singapore Branch)
160 Paya Lebar Road
#04-01 Orion@Paya Lebar
Singapore 409022
T +65 6247 7728
F +65 6247 7729
sales@elster-instromet.com.sg



MR PN6 MCT EN02

A17.10.2008

Subject to change without prior notice
All rights reserved

73030213