

Stainless steel bellows units EKO

Stainless steel flexible tubes ES

Technical Information · GB
10 Edition 09.15l

Stainless steel bellows units EKO

- Fault-free machine operation due to absorption of thermal and pressure expansions
- High bursting resistance due to multiple-layer bellows
- Axial and lateral movement absorption

Stainless steel flexible tubes ES

- Protection from material fatigue thanks to vibration absorption
- Angular and lateral movement absorption
- Compensation for installation tolerances due to optional lengths



Contents

Stainless steel bellows units EKO..... 1

Stainless steel flexible tubes ES 1

Contents 2

1 Application 3

1.1 EKO..... 3

1.2 ES 4

1.3 Examples of application 6

1.3.1 Gas and air supply to a drying kiln..... 6

1.3.2 Exhaust gas system on a compressor 6

1.3.3 Fuel pipes on a gas engine 7

1.3.4 Gas pressure control, measuring and safety train 7

1.3.5 Gas and air supply to an aluminium smelting furnace8

1.3.6 Pipes on a heating and solar system 8

2 Certification 9

3 Selection 10

3.1 Stainless steel bellows unit with threaded connection EKO..R..... 10

3.1.1 Type code Stainless steel bellows unit with threaded connection EKO..R..... 10

3.2 Stainless steel bellows unit with flanged connection EKO..F..... 10

3.2.1 Type code Stainless steel bellows unit with threaded connection EKO..F..... 10

3.3 Stainless steel flexible tube ES 11

3.3.1 Type code Stainless steel flexible tube ES 11

4 Project planning information 12

4.1 Installation..... 12

4.1.1 EKO 12

4.1.2 ES..... 14

4.2 Flow velocities 14

5 Accessories..... 15

5.1 Flange seal WL-HT..... 15

5.2 Restricting orifice..... 15

6 Technical data 16

6.1 EKO..R dimensions..... 18

6.2 EKO..F dimensions..... 19

6.3 ES dimensions..... 20

6.4 EKO, ES reduction factors..... 21

6.4.1 Dynamic reduction factor k_d 21

6.4.2 Temperature moderating factor k_t 21

7 Maintenance cycles..... 22

8 Glossary 23

8.1 Axial movement..... 23

8.2 Angular movement 23

8.3 Lateral movement 23

8.4 Relative movement 23


8.5 Vibration amplitude..... 23

Feedback..... 24

Contact..... 24

1 Application

1.1 EKO

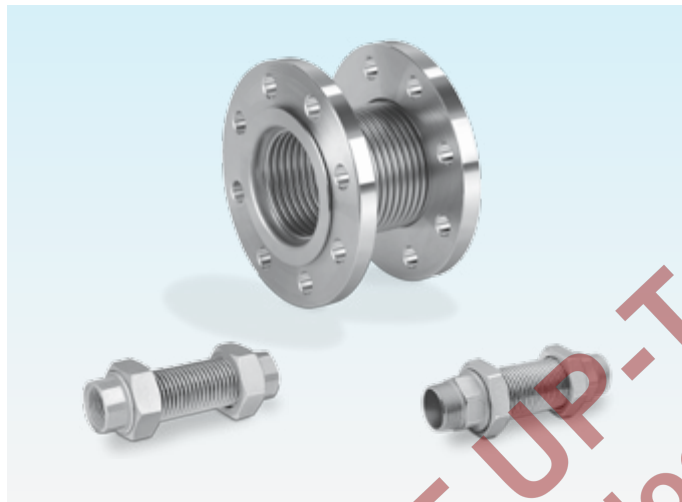

Stainless steel bellows units with threaded and flanged connections

The stainless steel bellows unit EKO is designed for stress-free and safe pipe installation and to prevent transmission of vibration in gas, air and water installations.


The stainless steel bellows unit EKO can compensate for thermal and pressure expansions in pipelines, disengage elastically-mounted units from the systems to which they are connected and compensate elastically for relative movements between system parts, see page

23 (Relative movement). This results in reduced forces and moments at the connections. The stainless steel bellows unit with its hot-galvanized flange permits the use of landfill gas.

Stainless steel bellows units EKO can optionally be supplied with an integrated restricting orifice for adjusting the gas and air flow rate for gas burners.

The stainless steel bellows unit EKO..R can be used in operating temperatures of up to 250°C. EKO..F, EKO..FZ can withstand high temperatures (HTB) in conjunction with WL-HT type flange seals, see page 15 (Accessories).

1.2 ES

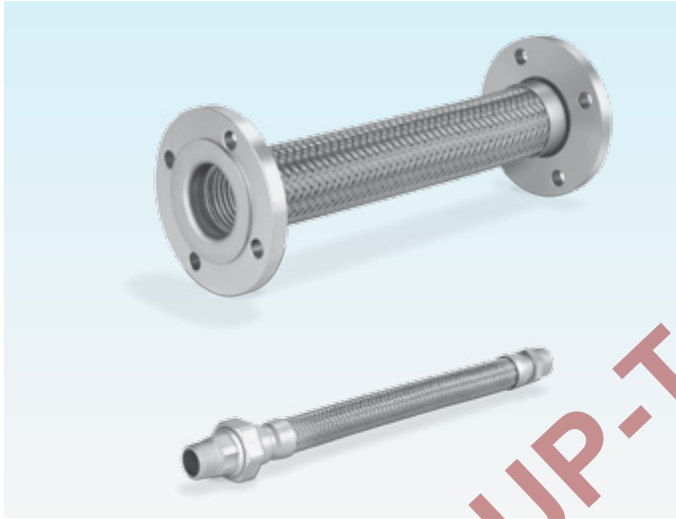

Stainless steel flexible tubes with threaded and flanged connections

presses, for example. It can be fitted in places where no fixed points can be located.

The stainless steel flexible tube ES is optionally available in any length.

The stainless steel flexible tube ES is designed for stress-free and flexible connection of devices and pipes and to prevent transmission of vibration in gas, air and water installations.

The stainless steel flexible tube ES can absorb vibrations with a high frequency and low amplitude, e.g. in fuel pipes, reduce structure-borne noise in pipelines, for example, compensate for inaccuracies in installation between units and serve as a flexible pipe element on



Stainless steel flexible tubes in the supply lines of buildings




Stainless steel flexible tubes on gas engine supply lines



Stainless steel flexible tubes and bellows units at the kiln in the brickworks


1.3 Examples of application

1.3.1 Gas and air supply to a drying kiln

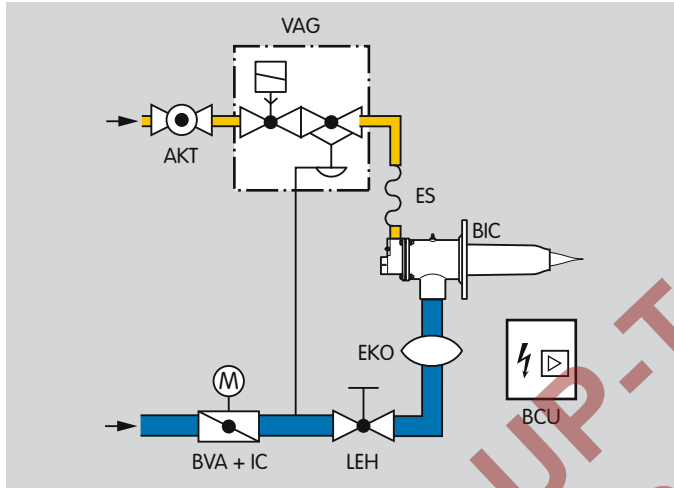


Pressure and temperature factors from the burner influence the gas and air supply. The stainless steel flexible tube and bellows unit compensate for the pressure and thermal expansion in the pipelines. They ensure that the process runs without any problem.

1.3.2 Exhaust gas system on a compressor

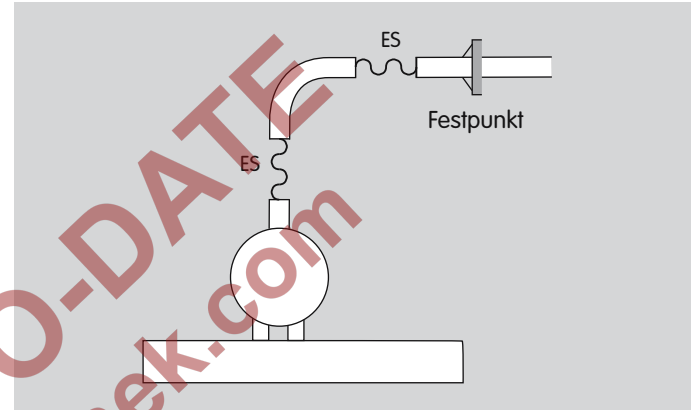


Two stainless steel flexible tubes mounted at right angles in the exhaust gas pipe reduce vibrations on all sides which the unit causes on the connected pipe.

1.3.3 Fuel pipes on a gas engine

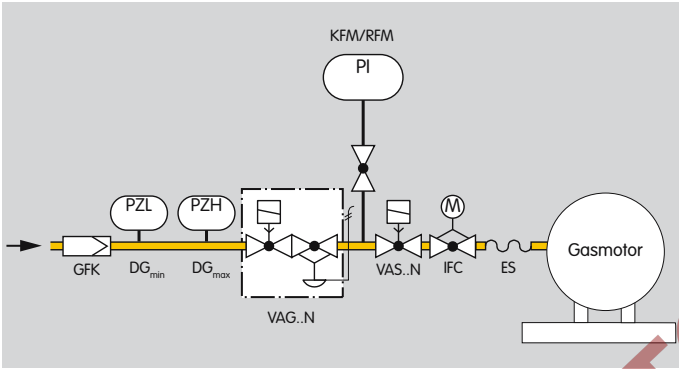


When a gas engine is connected to the fuel pipes, installation tolerances can occur at the connection points. The simple way to compensate for these is with stainless steel flexible tubes.

1.3.4 Gas pressure control, measuring and safety train

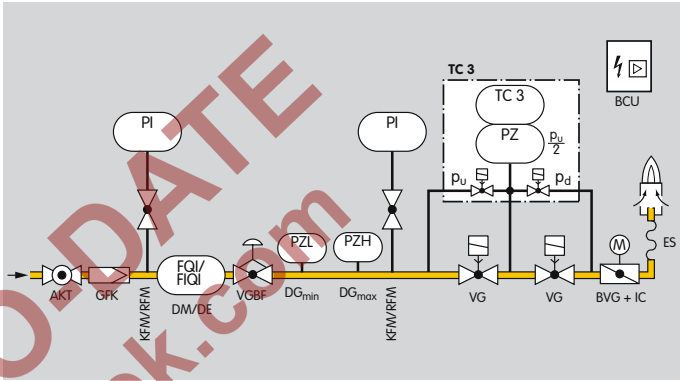


The stainless steel flexible tube offers an effective and cost-efficient solution for protecting gas lines, on thermal flue air purification systems for instance, against thermal expansion. It reduces structure-borne noise in the pipeline.

1.3.5 Gas and air supply to an aluminium smelting furnace

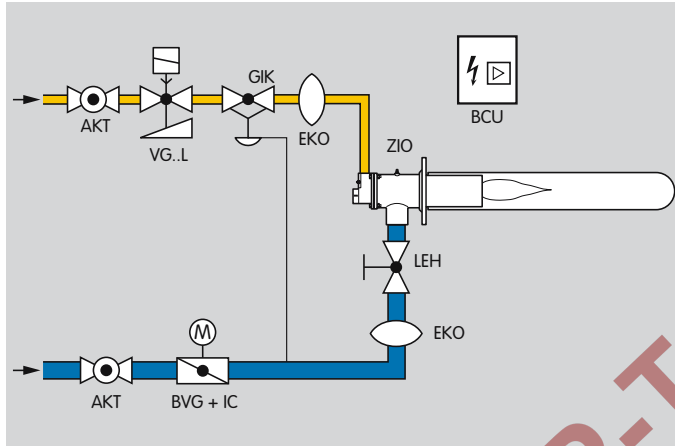

Pressure and temperature factors influence the gas and air supply. The stainless steel bellows units compensate for the pressure and thermal expansion in the pipelines. Stainless steel bellows units EKO..10P are specially designed to suit the Kromschröder ZIO burner for a high burner output at low operating pressure.

1.3.6 Pipes on a heating and solar system

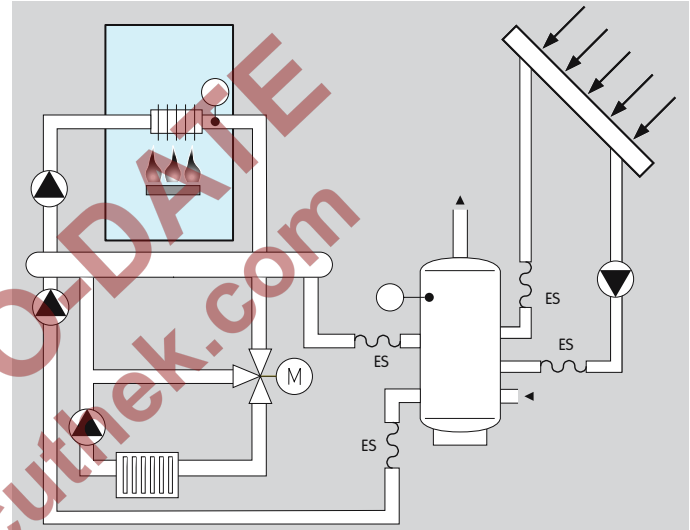

The pipes between the collector, boiler and storage tank are adapted to the building architecture. Stainless steel flexible tubes are used to compensate favourably for inaccuracies in installation.

2 Certification

Certificates EKO, see Docuthek.

Certificates ES, see Docuthek

EU certified



– DIN-DVGW tested and registered.

Type	DVGW test mark	Test based on
EKO..RI, EKO..RA	NG-4504AS3148	DIN 30681
EKO..F100P, EKO..F-Z	NG-4504AR3924	DIN 30681
ES	NG-4601AR0759	DIN 3384

– For all gases according to DVGW Code of Practice G 260, air and water.

Eurasian Customs Union



The product EKO/ES meets the technical specifications of the Eurasian Customs Union.

3 Selection

3.1 Stainless steel bellows unit with threaded connection EKO..R

	RI	RA
EKO 15	●	●
EKO 20	●	●
EKO 25	●	●
EKO 32	●	●
EKO 40	●	●
EKO 50	●	●

Order example

EKO 25RA

3.1.1 Type code Stainless steel bellows unit with threaded connection EKO..R

Code	Description
EKO	Stainless steel bellows unit
15, 20, 25, 32, 40, 50	Nominal diameter
RI	Rp internal thread
RA	R external thread

Overall length, see page 18 (EKO..R dimensions).

3.2 Stainless steel bellows unit with flanged connection EKO..F

	F	10P	100P	-Z
EKO 25	●			●
EKO 32	●			●
EKO 40	●			●
EKO 50	●			●
EKO 65	●			●
EKO 80	●			●
EKO 100	●			●
EKO 125	●			●
EKO 150	●			●
EKO 200	●		●	●
EKO 250	●	●		
EKO 350	●	●		

Order example

EKO 200F100P

3.2.1 Type code Stainless steel bellows unit with threaded connection EKO..F

Code	Description
EKO	Stainless steel bellows unit
25 – 350	Nominal diameter
F	Flange with hole pattern according to PN 10, p _u max. 10 bar
10P	Flange with hole pattern according to PN 16, p _u max. 1 bar
100P	Flange with hole pattern according to PN 16, p _u max. 16 bar
-Z	Hot-galvanized

Overall length, see page 19 (EKO..F dimensions).

3.3 Stainless steel flexible tube ES

	RA	F	500	800	1000
ES 8	●		●	●	●
ES 10	●		●	●	●
ES 16	●		●	●	●
ES 20	●		●	●	●
ES 25	●		●	●	●
ES 32	●		●	●	●
ES 40	●		●	●	●
ES 50	●		●	●	●
ES 65		●	●	●	●
ES 80		●	●	●	●
ES 100		●	●	●	●

Order example

ES 32RA800

3.3.1 Type code Stainless steel flexible tube ES

Code	Description
ES	Stainless steel flexible tube
8 – 100	Nominal diameter
RA	R external thread
F	Flange to EN 1092-1
500, 800, 1000	Length [mm]*


* Other lengths on request

4 Project planning information

4.1 Installation

If the stainless steel bellows unit EKO or the stainless steel flexible tube ES are used with external aggressive media acting on them, we recommend using additional protection, e.g. a heat shrink tube.


4.1.1 EKO

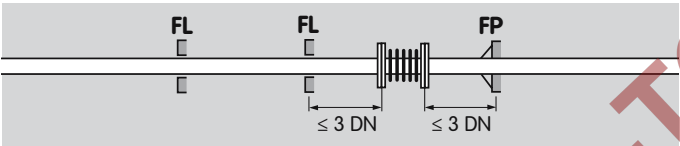

Only install one stainless steel bellows unit between two fixed points or guide bearings.

Distance between the bellows unit and the fixed point **FP** or guide bearing **FL** $\leq 3 DN$


Provide fixed points at the ends of pipe sections, which can absorb the axial compression force, the adjustment force of the bellows unit and the friction force of the guide bearings.

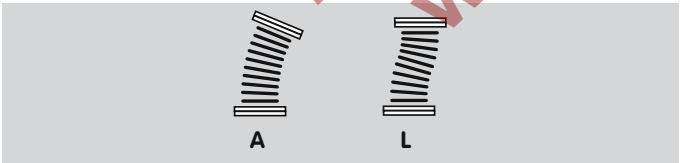


Dynamic stress:

A = Angular movement, **L** = Lateral movement, see Mo-

vement absorption, page 18 (EKO..R dimensions) or page 19 (EKO..F dimensions).

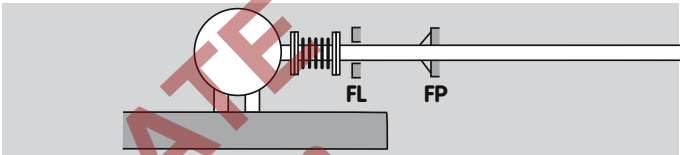

Vibration absorption: install the bellows unit as close to the vibrating unit as possible to avoid additional movements. Attach the pipeline immediately downstream of the bellows unit, independent of the vibrating unit, using a guide bearing **FL** or a fixed point **FP**.

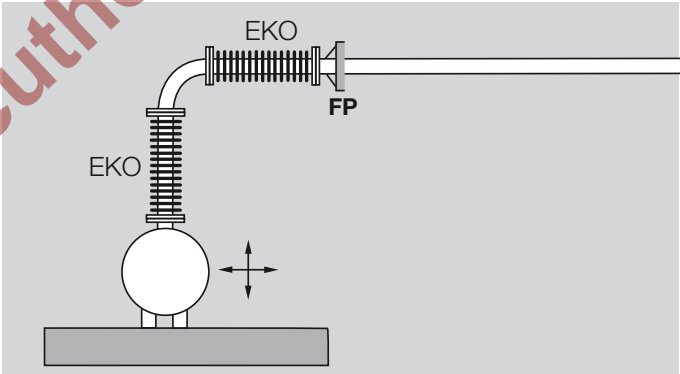

In the event of vibrations in all directions, install a second bellows unit at a right angle to the first one.

Ensure a sufficiently good stand for the vibrating unit in order to absorb the axial compression force.



Project planning information

The maximum "Vibration amplitude" may amount to ≤ 5 to 10% of the movement absorption. Movement absorption, see page 18 (EKO..R dimensions) or page 19 (EKO..F dimensions).

Determine the initial stress for the expansion or compression to be expected:

$$V = D \times \left(0.5 - \frac{t_E - t_{\min}}{t_{\max} - t_{\min}} \right)$$

V = Initial stress [mm],

D = Expansion of pipeline [mm],

t_E = Installation temperature [°C],

$t_{\min}$ = Min. operating temperature [°C],

$t_{\max}$ = Max. operating temperature [°C].

Positive initial stress = expand bellows unit,

negative initial stress = compress bellows unit.

Define the installation space on the basis of the overall length of the bellows unit:

$$L_E = B_L \pm V$$


L_E = Installation space

B_L = Overall length

V = Initial stress.

When a restricting orifice is used, see page 15 (Accessories) – the overall length is increased by 3 mm.


EKO..F

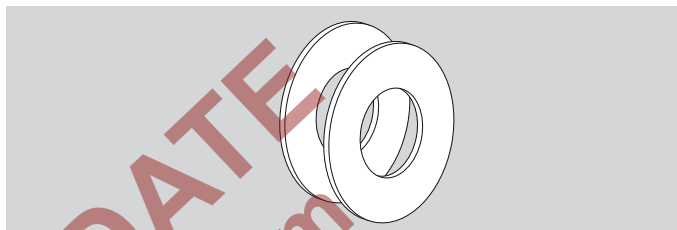

High temperature bearing in conjunction with WL-HT type flange seal only, see page 15 (Accessories).


4.1.2 ES

Avoid torsion load on the stainless steel flexible tube.

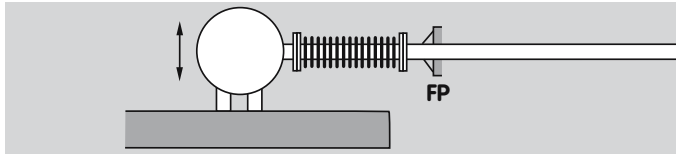


For expansion and vibration absorption, attach the pipeline directly downstream of the stainless steel flexible tube using a fixed point **FP**.

Note the minimum bending radius for one-off or frequent movement, see page 20 (ES dimensions).

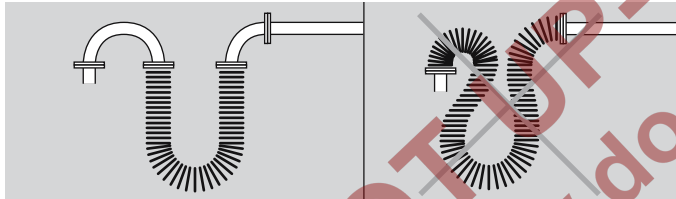


Impermissible bending immediately downstream of the connection element can be avoided by using rigid pipe bends.

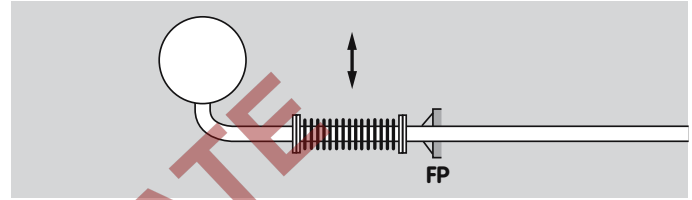

Always install the stainless steel flexible tube at right angles to the direction of movement.

Note distance to the wall or floor.

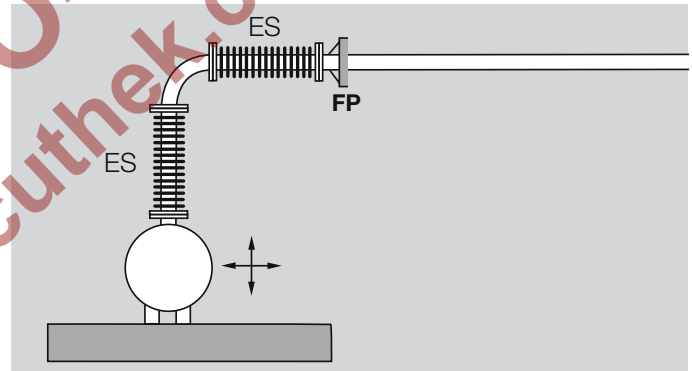


In the event of vibrations in all directions, install a second stainless steel flexible tube at a right angle to the first one.

4.2 Flow velocities

It is recommended that flow velocities of 6 m/s (1180 ft/min) are not exceeded in order to avoid flowing or whistling noises.

5 Accessories

5.1 Flange seal WL-HT

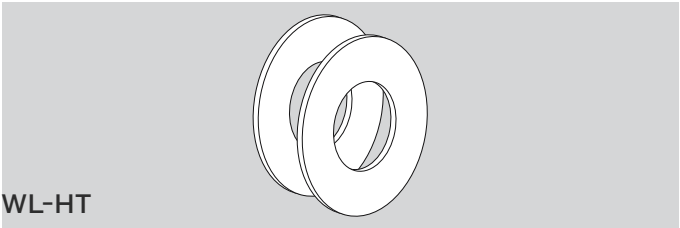

EKO..F, EKO..FZ can only withstand high temperatures in conjunction with WL-HT type flange seal for the inlet and outlet flange.

Flange seal	Order No.
WL-HT DN 25	03352221
WL-HT DN 32	03352222
WL-HT DN 40	03352223
WL-HT DN 50	03352224
WL-HT DN 65	03352225
WL-HT DN 80	03352226
WL-HT DN 100	03352227
WL-HT DN 125	03352228
WL-HT DN 150	03352229
WL-HT DN 200	03352220

5.2 Restricting orifice

Restricting orifices made of V2A steel can be supplied for stainless steel bellows units EKO if required. Please ask us for a quotation.

6 Technical data

Media: all gases to DVGW Code of Practice G 260, air and water or gases to DVGW Code of Practice G 262.

EKO

The pressure loss at the EKO is approximately twice as high as that of a smooth pipe of the same length.

Stainless steel bellows 1.4571.

EKO..R

Clamping rings made of stainless steel 1.4301, fittings made of galvanized malleable cast iron REINZ-AFM 34 seal to DIN 3535-6, flat-sealing, resistant to high temperatures (HTB).

Operating temperature:

air: -20 to +250°C,
gas: -20 to +250°C,
water: 0 to +100°C.

Short-term temperature peaks of up to 300°C are admissible.

Max. inlet pressure MOP:

air and water: 10 bar,
gas: 5 bar.

Observe the maximum allowable inlet pressure for dynamic stress and increased temperature, see page 21 (EKO, ES reduction factors).

EKO..F

Bellows and flange made of stainless steel: 1.4571 up to DN 100, 1.4541 > DN 100.

Operating temperature:

air: -20 to +500°C,
gas: -20 to +150°C,
water: 0 to +100°C.

Max. inlet pressure MOP: 10 bar,
EKO 250F10P, EKO 350F10P: 1 bar.

Observe the maximum allowable inlet pressure for dynamic stress and increased temperature, see page 21 (EKO, ES reduction factors).

EKO..F: galvanized flange, EKO..FZ: hot-galvanized flange.

High temperature bearing in conjunction with WL-HT type flange seals only, see page 15 (Accessories).

ES

The pressure loss is approx. twice to three times as high as that of a smooth pipe of the same length. When installed in a 90° bend, it increases at maximum by a factor of 2.

Material: 1.4541 stainless steel corrugated tube,
1.4301 stainless steel sheathing.

ES..RA

DN 8 to DN 25 connecting threads on both sides, made of machining steel 1.0718, from DN 32 made of steel 1.0037.

Connection:

1 x external thread, conically sealing union,
1 x hexagon nipple and external thread to EN 10226-1.

Welded stainless steel fittings.

Loose screw attachment parts made of galvanized malleable cast iron or cast steel.

Operating temperature:

air, gas, water: -10 to +300°C; the maximum admissible operating temperature may be reduced depending on the sealant selected.

Max. inlet pressure p_u :

air and water: 16 bar,
gas: 4 bar.

Observe the maximum allowable inlet pressure for dynamic stress and increased temperature, see page 21 (EKO, ES reduction factors).

ES..F

Welding flange made of stainless steel 1.4541, (loose flange made of steel, galvanized, PN 16 to DIN EN 1092-1).

Operating temperature:



air, gas, water: -10 to +300°C.

Max. inlet pressure p_u :

air, gas and water: 16 bar.

Observe the maximum allowable inlet pressure for dynamic stress and increased temperature, see page 21 (EKO, ES reduction factors).


6.1 EKO..R dimensions

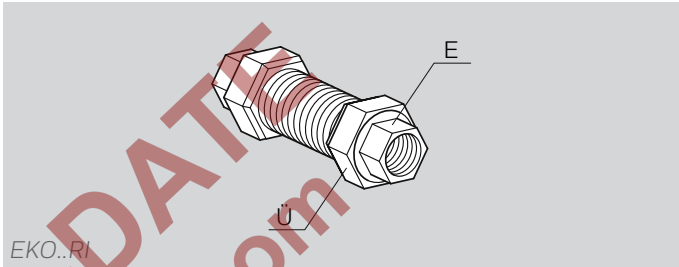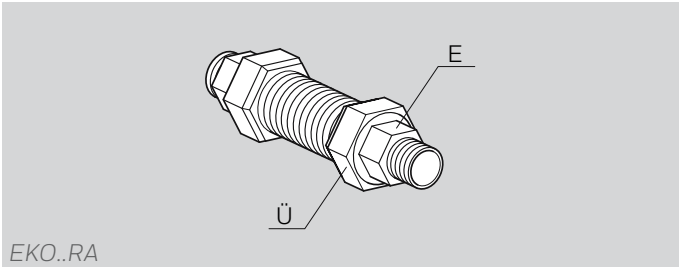

Type	Connection		Connector A/F [mm]		Number of screws n	Movement absorption ± [mm]			Overall length (± 2 mm) [mm]	Weight [kg]
	DN		Ü*	E*		Δ axial	Δ angular	Δ lateral		
EKO 15RA	15	R ½	41	26	–	12	50	8	157	0.41
EKO 20RA	20	R ¾	50	32	–	14	45	7	173	0.68
EKO 25RA	25	R 1	55	38	–	15	40	8	194	0.91
EKO 32RA	32	R 1¼	67	48	–	15	35	8	215	1.27
EKO 40RA	40	R 1½	75	54	–	17	35	9	240	1.71
EKO 50RA	50	R 2	90	66	–	21	30	10	270	2.46
EKO 15RI	15	Rp ½	41	26	–	12	50	8	125	0.39
EKO 20RI	20	Rp ¾	50	32	–	14	45	7	135	0.66
EKO 25RI	25	Rp 1	55	38	–	15	40	8	150	0.72
EKO 32RI	32	Rp 1¼	67	48	–	15	35	8	165	1.00
EKO 40RI	40	Rp 1½	75	54	–	17	35	9	190	1.40
EKO 50RI	50	Rp 2	90	66	–	21	30	10	210	2.05



Ü* = union nut, E* = insert.

6.2 EKO..F dimensions



Type	Connection		Hole circle	Number of screws	Movement absorption			Overall length (± 2 mm)	Weight
	DN	Hole pattern	[mm] K	n	Δ axial ± [mm]	Δ angular ± [mm]	Δ lateral ± [mm]	[mm]	[kg]
EKO 25	25	PN 10/16	85	4	7	18	1.5	60	2.30
EKO 32F	32	PN 10/16	100	4	8	17	2	65	3.42
EKO 40F (Z)	40	PN 10/16	110	4	12	18	2	75	3.95
EKO 50F (Z)	50	PN 10/16	125	4	12	18	2.5	95	4.80
EKO 65F (Z)	65	PN 10/16	145	4	17	18	3.5	110	5.90
EKO 80F (Z)	80	PN 10/16	160	8	20	18	3.5	125	7.20
EKO 100F (Z)	100	PN 10/16	180	8	20	16	4.5	150	7.82
EKO 125F (Z)	125	PN 10/16	210	8	22.5	14	4.1	175	11.30
EKO 150F (Z)	150	PN 10/16	240	8	28	16.5	7	200	13.00
EKO 200F (Z)	200	PN 10	295	8	40	16	7.5	240	17.30
EKO 200F100P	200	PN 16	295	12	40	16	7.5	240	16.70
EKO 250F10P	250	PN 16	355	12	36	13	4.2	190	17.7
EKO 350F10P	350	PN 16	470	16	30	9	2	168	28.7

6.3 ES dimensions

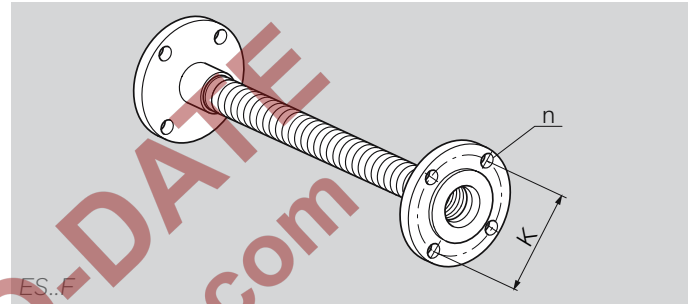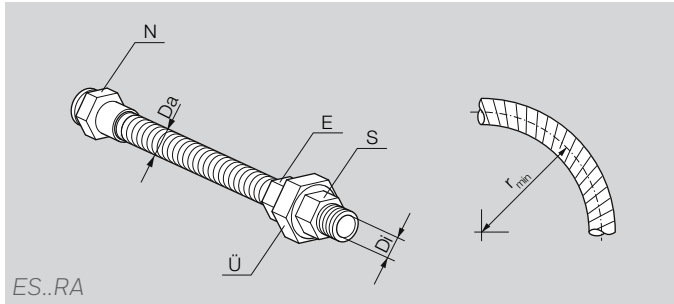

Type	Connection		Screw connector A/F [mm]				Hole circle	Number of screws	Tube diameter		Minimum bending radius r_{min} [mm]	Nominal bending radius r_n [mm]	Weight
	DN [mm]		N*	E*	Ü*	S*	K [mm]		Di [mm]	Da [mm]	One-off bending	Frequent bending	[kg]
ES 8RA	8	R 1/4	14	13	28	19	–	–	8.3	13.7	32	120	0.32
ES 10RA	10	R 3/8	19	16	32	22	–	–	10.2	15.7	38	130	0.40
ES 16RA	16	R 1/2	22	19	41	26	–	–	16.2	23.3	58	160	0.63
ES 20RA	20	R 3/4	27	26	50	32	–	–	20.2	28.3	70	170	0.92
ES 25RA	25	R 1	36	32	55	38	–	–	25.5	34.2	85	190	1.34
ES 32RA	32	R 1 1/4	46	46	67	48	–	–	34.2	43.0	105	260	1.87
ES 40RA	40	R 1 1/2	50	55	75	54	–	–	40.1	52.0	130	300	2.37
ES 50RA	50	R 2	60	65	90	66	–	–	50.4	62.6	160	320	3.41
ES 65F	65	DN 65	–	–	–	–	145	4	65.3	81.2	200	460	8.24
ES 80F	80	DN 80	–	–	–	–	160	8	80.2	98.0	240	660	10.51
ES 100F	100	DN 100	–	–	–	–	180	8	100.0	119.4	290	750	11.73

N* = Threaded nipple, E* = Insert, Ü* = Union nut, S* = Screw-in part.

6.4 EKO, ES reduction factors

Pressure pulsation, pressure surges, pressure fluctuations, frequent movements, vibrations and high temperatures reduce the max. permissible inlet pressure.

To calculate the permissible inlet pressure:

$$p_{max.} = MOP \times k_d \times k_t$$

$p_{max.}$ = permitted operating pressure [bar]

MOP= maximum allowable operating pressure [bar]

k_d = dynamic reduction factor

k_t = temperature reduction factor

6.4.1 Dynamic reduction factor k_d

	Slight. slow movement; no vibration	Frequent. uniform movement; vibrations	Rhythmic and surge-type movement; strong vibrations
Stationary or slow and uniform flow	1	0.80	0.40
Pulsating and non-uniform flow	0.80	0.63	0.32
Rhythmic and surge-type flow	0.32	0.20	On request

6.4.2 Temperature moderating factor k_t

Temperature °C	EKO/ES from DN 125 material 1.4541	EKO up to DN 100 material 1.4571
20	1.00	1.00
50	0.93	0.92
100	0.83	0.80
150	0.78	0.76
200	0.74	0.72
250	0.70	0.68
300	0.66	0.64
350	0.64	0.62
400	0.62	0.60
450	0.60	0.59
500	0.59	0.58
550	0.58	0.58

7 Maintenance cycles

The stainless steel bellows unit EKO and the stainless steel flexible tube ES require little servicing.

NOT UP-TO-DATE
www.docuthek.com

8 Glossary




8.1 Axial movement

The movement of the stainless steel bellows unit or stainless steel flexible tube is absorbed in the axial direction.



8.2 Angular movement

The movement absorption of the stainless steel bellows unit or stainless steel flexible tube takes place at a certain angle.



8.3 Lateral movement

The movement of the stainless steel bellows unit or stainless steel flexible tube is absorbed laterally.

8.4 Relative movement

The relative movement is the movement of one body in relation to another.

8.5 Vibration amplitude

The vibration amplitude is the largest excursion of a vibration from the compressed to the extended bellows unit.

Feedback

Finally, we are offering you the opportunity to assess this “Technical Information (TI)” and to give us your opinion, so that we can improve our documents further and suit them to your needs.

Clarity

Found information quickly
Searched for a long time
Didn't find information
What is missing?
No answer

Comprehension

Coherent
Too complicated
No answer

Scope

Too little
Sufficient
Too wide
No answer



Use

To get to know the product
To choose a product
Planning
To look for information

Navigation

I can find my way around
I got “lost”
No answer

My scope of functions

Technical department
Sales
No answer

Remarks

Contact

Elster GmbH
Postfach 2809 · 49018 Osnabrück
Strotheweg 1 · 49504 Lotte (Büren)
Germany
Tel +49 541 1214-0
Fax +49 541 1214-370
info@kromschroeder.com
www.kromschroeder.com

The current addresses of our international agents
are available on the Internet:
www.kromschroeder.de/Weltweit.20.0.html?&L=1

We reserve the right to make technical
modifications in the interests of progress.
Copyright © 2016 Elster GmbH
All rights reserved.

