


# MegaStar

Packaged High Efficiency Multi-Fuel Burner  
for Aggregate Drying Applications

MS-1  
Edition 09/14

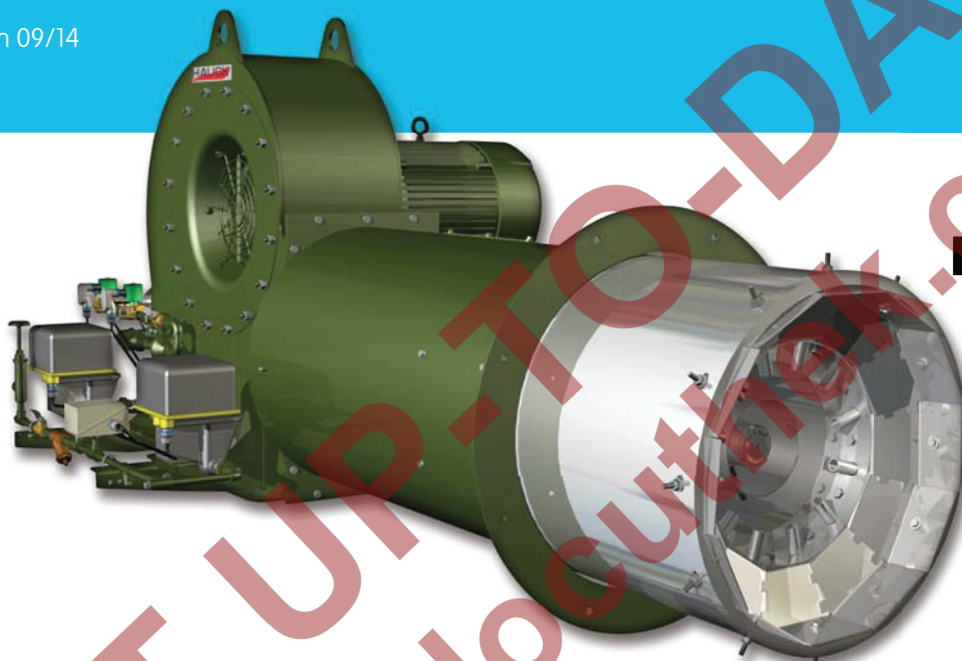

- Energy savings
- Low NOx emissions
- Low motor starting current reduces utility demand charges
- Ideal for sand drying applications
- Reduction of thermal and mechanical stresses on the motor during starts
- Standard and longnose versions available
- Simple installation and set-up
- High power factor
- Lower KVA



elster  
Kromschroder

Building on the success of the EcoStar and EcoStar II burner lines, Hauck is proud to offer the latest in rotary dryer burners, the MegaStar. Designed with the customer in mind, the MegaStar is easy to light, reliable, and efficient.

The burner supports a wide variety of liquid and gaseous fuels offering flexibility for optimizing fuel costs. Low pressure atomization is used for light fuel oil or LP with high pressure compressed air atomization available for heavy fuel oils or high elevation installations. Emissions of NOx, CO and VOCs are minimized with proven and effective technologies.

The burner's wide range of flame shaping ability allows the flame to be adapted to specific process requirements. All combustion is completed within the recommended combustion zone, keeping emissions low by eliminating flame quenching from process materials.

The MegaStar employs variable frequency drive (VFD) technology for precise air flow control over its entire operating range. Combining precise air flow control with real time fuel flow measurement results in maximum combustion efficiency and cost savings. The use of this VFD technology offers energy savings through reduced electricity consumption.

The burner package is compact and easy to install, yet remains accessible and simple to service. The number of moving parts has been reduced and linkages have been eliminated to make the burner easy to maintain and adjust. The burner, paired with a Hauck BCS6000C panel, provides the ultimate solution for flame management, process control, and efficiency.

Available in sizes ranging from a nominal 50 to 150 million Btu/hr (14,650 to 43,960 kW), the MegaStar is ready to meet your production needs. The standard design can be applied to applications up to 1500°F (815°C). Custom lengths are also available for warm-mix applications.



Direct coupled fuel motors eliminate the need for linkage connections.

**Quick payback brings positive results to your bottom line.**

**Annual Energy Cost per Control Method\* :**

Outlet Damper Control -	\$ 16,249
Variable Frequency Drive -	\$ 6,664
Energy Saving Per Year -	\$ 9,585

\* This Energy Savings Estimation is based on estimated data using the Eaton/Cutler-Hammer Energy Savings Estimator

For additional information on this product, visit our website at:

[www.hauckburner.com](http://www.hauckburner.com)

Hauck Manufacturing Company  
Kromschröder Controls  
100 North Harris Street  
Cleona, PA, 17042

T +1 717-272-3051  
F +1 717-273-9882  
info@hauckburner.com



Copyright 2014 Hauck  
Manufacturing Company