

TBAB BELT DRIVE TURBO BLOWERS

Belt drive fiberglass-housed blowers in pressure ranges from 7 to 40 osig and capacities from 90 to 90,000 cfm, "tailored" to meet precise air handling requirements.




HALUCK



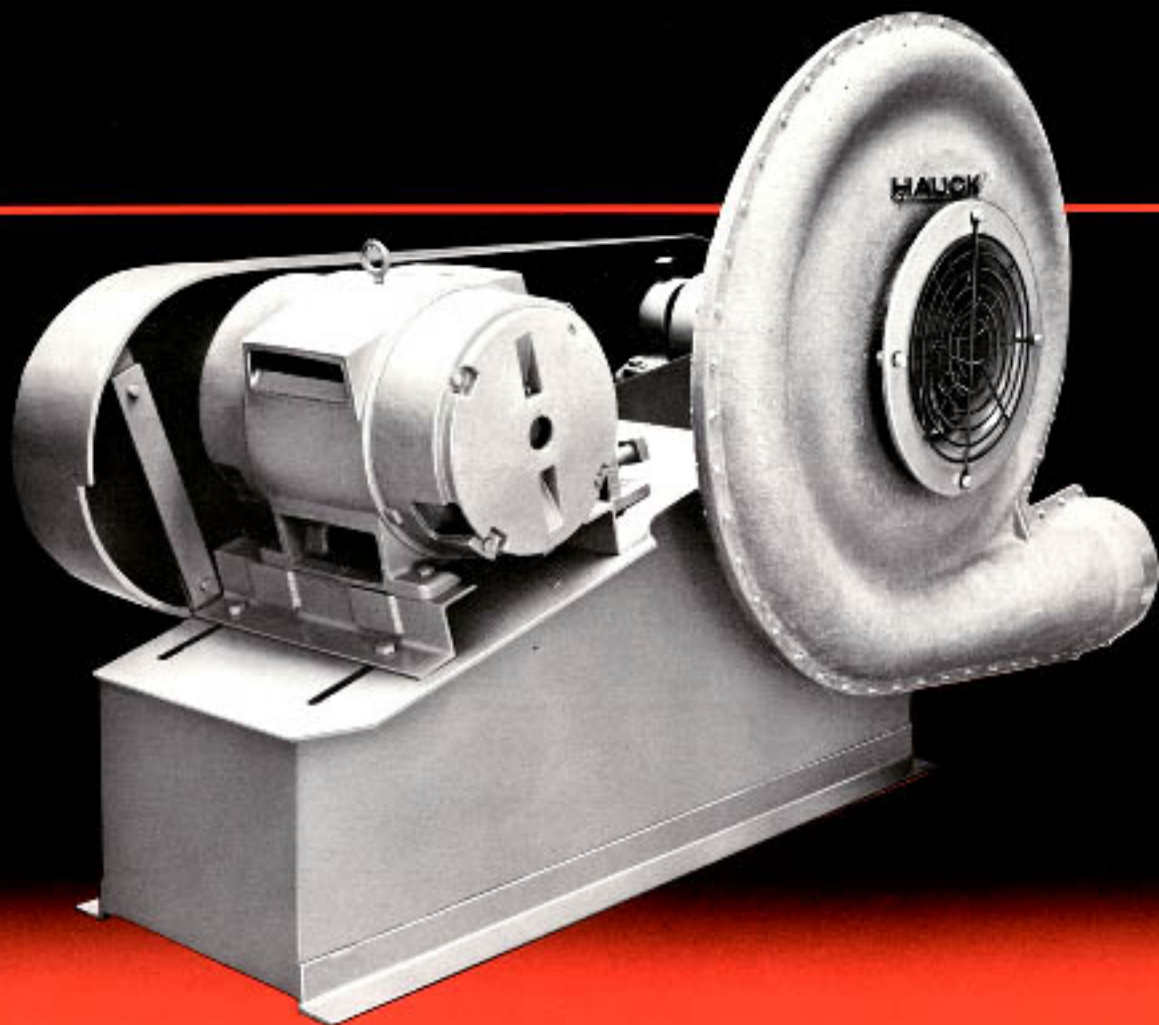


HALL®


CONSTRUCTION FEATURES

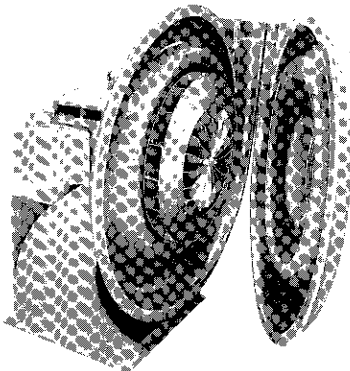



FIBERGLASS CASING:
Highly efficient involute scroll design. Laminated lining bonded to casing interior has greater abrasive resistance than steel and eliminates need for gasketing.




TURBINE DESIGN IMPELLER:
Fabricated of heavy gauge aluminum, riveted construction. Precision Turbine type design. Radial bladed with inlet inducer. (Pat. No. 3,572,967)

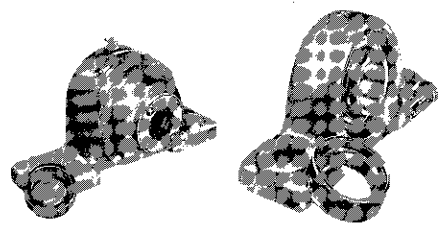


SHAFT & BEARINGS:
Computer sized shaft and bearings. Shafts are fully machined. Bearings are heavy duty high speed for long life, trouble-free operation.

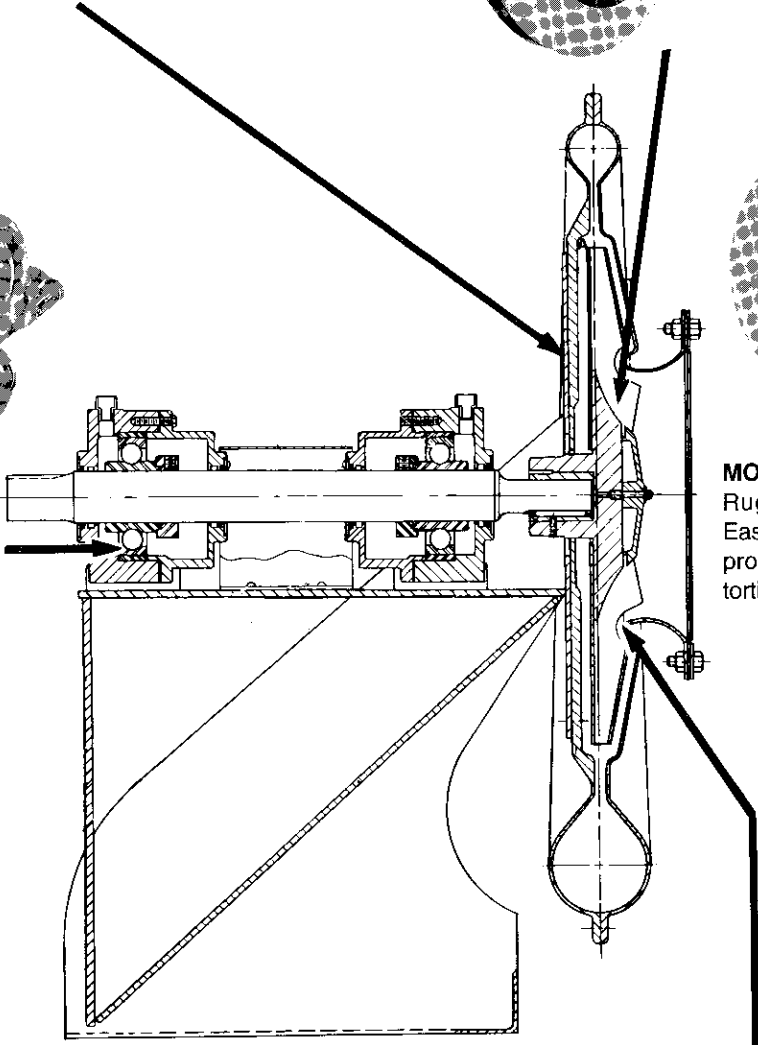


MOTOR SLIDE RAILS:
Rugged steel construction. Easy positive adjustment for proper belt tension with no distortion.




FLEXIBLE CONNECTIONS:
Flexible outlet sleeve and clamps are furnished as standard equipment to prevent vibration from other equipment being transmitted to blower. Blower should not be piped solid.



BELT GUARD:
Furnished as standard equipment on Arrangement No. 9 only. Fabricated of heavy reinforced fiberglass.

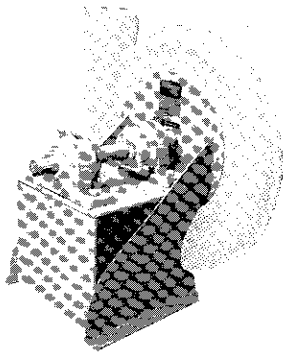

BEARING BASE:
All welded heavy steel construction well braced to eliminate vibration or distortion. Arrangement No. 9 base is braced to support motor as integral unit.




INLET:
The inlet turning ring seal (Pat. No. 3,572,963) combined with the curved inlet inducer impeller blade produce efficiencies heretofore unobtainable in Turbo Pressure Blower design. Steel inlet guard furnished as standard equipment (not shown).


HAUCK QUICK SELECTION CHART

The Quick Selection Chart below combines considerations of first cost and operating cost to allow the user to select the proper blower for the application. To determine proper size blower, plot intersection of volume (cfm) and pressure.

EXAMPLE: The intersection of 3040 cfm and 60" total pressure will be found in block labelled 081-291. Refer to Multi-Rating Table for blower size 081-291 for RPM & MHP. In this example, Multi-Rating Table shows blower 081-291-F will produce 3040 cfm at 60" TP at 4145 RPM and 44.7 MHP.

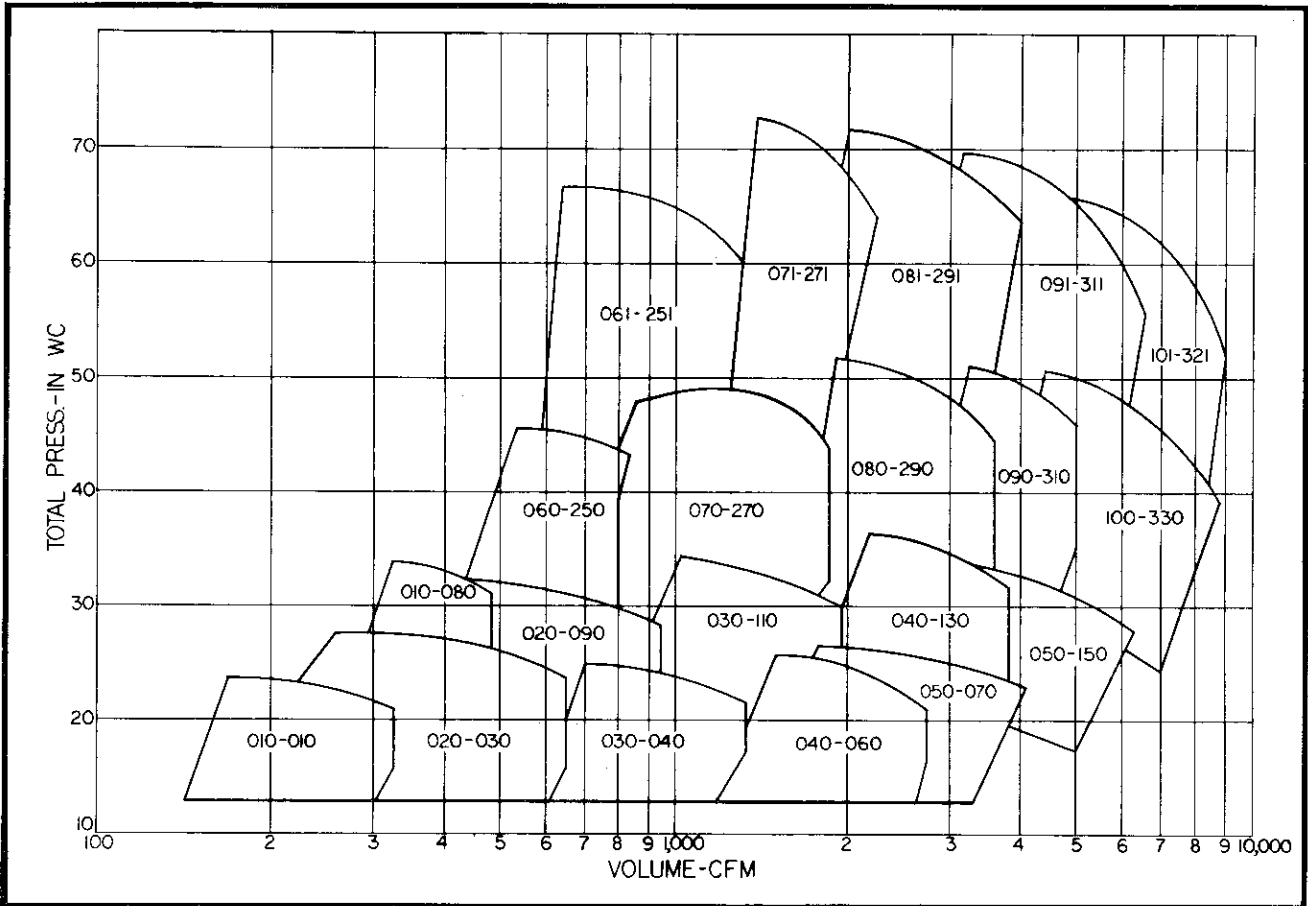

BLOWER MODEL NUMBER SELECTION

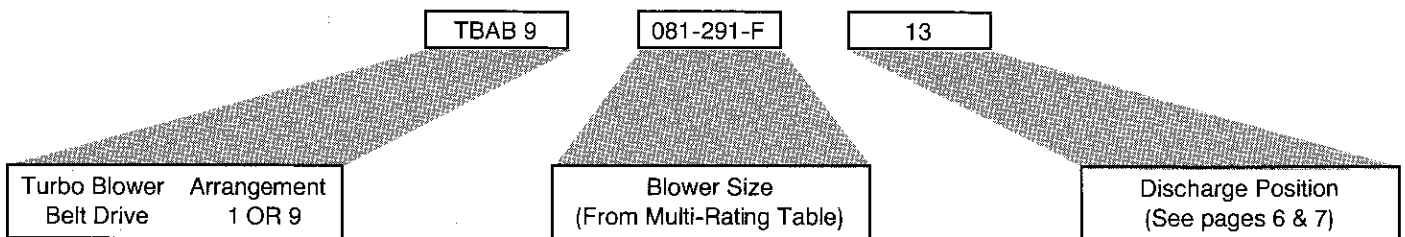

ORDERING INFORMATION

To ensure proper and accurate processing of your order, the following information is required:

1. Catalog Blower Model Number
2. Performance Data (cfm, pressure, RPM, and MHP)
3. Special altitude or temperature conditions (See page 5)
4. Accessories required (See page 28)
5. Motor Electrical Specifications (if motor furnished by other than Hauck, specify frame size).
6. V-Belt Drive Selection (if V-Belt Drive furnished by other than Hauck, provide complete spec. of drives).
7. Function — Brief description of system & blower function.



ENGINEERING INFORMATION

TABLE 1
CORRECTION FACTOR TABLE

AIR TEMP DEG. F.	ALTITUDE IN FEET ABOVE SEA LEVEL																			
	0	500	1000	1500	2000	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500	8000	8500	9000	10000
60°	.75	.77	.78	.80	.81	.83	.84	.86	.87	.89	.90	.92	.94	.96	.98	1.00	1.02	1.03	1.06	1.09
40°	.79	.81	.82	.84	.85	.87	.89	.90	.92	.93	.95	.97	.99	1.00	1.03	1.05	1.07	1.08	1.11	1.15
20°	.83	.85	.86	.88	.90	.91	.93	.95	.96	.98	1.00	1.01	1.04	1.05	1.08	1.09	1.12	1.14	1.16	1.20
0°	.87	.89	.91	.92	.94	.96	.98	.99	1.01	1.03	1.05	1.06	1.08	1.10	1.13	1.15	1.17	1.19	1.22	1.26
40°	.94	.96	.98	1.00	1.02	1.04	1.05	1.08	1.10	1.12	1.14	1.16	1.18	1.21	1.23	1.26	1.28	1.30	1.32	1.36
70°	1.00	1.02	1.04	1.06	1.08	1.10	1.12	1.14	1.16	1.18	1.20	1.22	1.25	1.27	1.30	1.32	1.35	1.37	1.40	1.45
80°	1.02	1.04	1.06	1.08	1.10	1.12	1.14	1.16	1.19	1.21	1.23	1.26	1.28	1.30	1.33	1.36	1.38	1.41	1.43	1.48
100°	1.06	1.08	1.10	1.12	1.14	1.16	1.19	1.21	1.23	1.25	1.28	1.30	1.33	1.35	1.38	1.41	1.43	1.46	1.48	1.54
120°	1.09	1.12	1.14	1.16	1.18	1.20	1.23	1.25	1.28	1.30	1.32	1.35	1.38	1.40	1.43	1.46	1.48	1.51	1.53	1.59
140°	1.13	1.15	1.18	1.20	1.22	1.25	1.27	1.29	1.32	1.34	1.37	1.40	1.42	1.45	1.48	1.51	1.54	1.57	1.58	1.66
160°	1.17	1.19	1.22	1.24	1.26	1.29	1.31	1.34	1.36	1.39	1.42	1.44	1.47	1.50	1.53	1.56	1.59	1.62	1.64	1.70
180°	1.21	1.23	1.26	1.28	1.30	1.33	1.36	1.38	1.41	1.43	1.46	1.49	1.52	1.55	1.58	1.61	1.64	1.67	1.70	1.75
200°	1.25	1.27	1.29	1.32	1.34	1.37	1.40	1.42	1.45	1.48	1.51	1.54	1.57	1.60	1.63	1.66	1.69	1.72	1.75	1.81

The above composite table shows density correction factors for temperature and altitude. Performance ratings shown in this bulletin have been calculated for standard air density of .0749 lbs./cu. ft. (70° F. @ 29.92" barometric pressure). When density is other than standard, corrections for pressure and horsepower must be made.

EXAMPLE: Requirement — a blower to deliver 3040 ICFM at 16" pressure at 120° F. and 3500 ft. altitude.


1. Density correction (Table 1) indicates a factor of 1.25 for 120° F. and 3500 ft. altitude.

2. 16" x 1.25 = 20"
3. From Quick Selection Chart on Page 4 select model TBAB-050-070.
4. From Multi-Rating Table for Model TBAB-050-070 (Page 16) select blower requirements for 3040 ICFM at 20" pressure = 3337 RPM and 14.6 MHP.
5. Divide pressure and hp shown by 1.25 for performance at elevated temperature and altitude. Corrected selection will deliver 3040 ICFM at 16" pressure at 120° F. and 3500 ft. altitude, with speed of 3337 and MHP of 11.7.

TABLE 2
PRESSURE CONVERSION TABLE

O.S.I. to IN. W.C.				IN. W.C. to O.S.I.			
O.S.I.	IN. W.C.	O.S.I.	IN. W.C.	IN. W.C.	O.S.I.	IN. W.C.	O.S.I.
1	1.73	36	62.28	1	.57	36	20.31
2	3.46	38	66.74	2	1.16	38	21.97
4	6.92	40	69.20	4	2.31	40	23.12
6	10.38	42	72.66	6	3.47	42	24.28
8	13.84	44	76.12	8	4.62	44	26.43
10	17.30	46	79.58	10	5.78	46	26.53
12	20.76	48	83.04	12	6.94	48	27.75
14	24.22	50	86.50	14	8.09	50	28.90
16	27.68	52	89.96	16	9.25	52	30.06
18	31.14	54	93.42	18	10.40	54	31.21
20	34.60	56	96.88	20	11.56	56	32.37
22	38.06	58	100.34	22	12.72	58	33.53
24	41.52	60	103.80	24	13.88	60	34.68
26	44.98	62	107.26	26	15.03	62	35.84
28	48.44	64	110.72	28	16.18	64	36.99
30	51.90	66	114.18	30	17.34	66	38.15
32	55.36	68	117.64	32	18.50	68	39.31
34	58.82	70	121.10	34	19.65	70	40.46

TABLE 3
TURBO BLOWER PERFORMANCE
VACUUM RATING AT ATMOSPHERIC
DISCHARGE

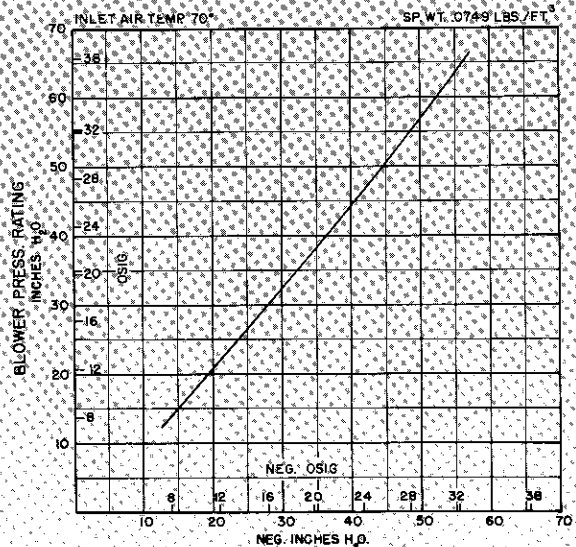


VACUUM PRODUCED AT INLET
WITH 14.7 PSIA. DISCHARGE


DIMENSIONS

ARRANGEMENT 9

AVAILABLE STANDARD DISCHARGE POSITIONS DRIVE END

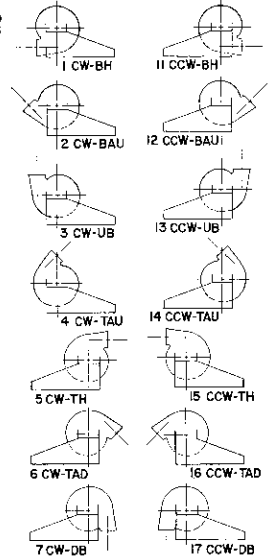

CW-BH Shown — See Table this page for available mounting positions

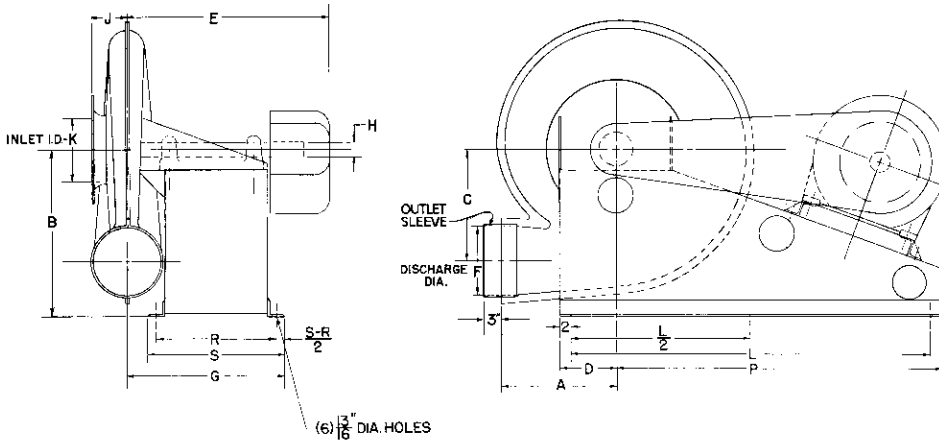

DO NOT USE FOR CONSTRUCTION PURPOSES - CERTIFIED DIMENSIONS AVAILABLE AT TIME OF ORDER




MODEL NUMBER TBAB 9-	SHAFT SIZE	A	B	C	D	E	F	G	H	J	K	L	P	R	S	KEYWAY	MINIMUM * SHEAVE DIA.														
010-010-A	1 3/16	12 7/8	27 3/8	13	9 1/4	22 3/4	4 1/4	19	1 3/16	3	8	49	43 3/4	14 13/16	17 1/16	1/4 x 1/4 x 1 5/8	3.0														
010-080-A		13		22 3/4			4 1/4									19		1 3/16	3	8	1/4 x 1/4 x 1 5/8										
020-030-A		17		13 3/8			22 3/4									6 1/4		19	1 3/16	3	8	1/4 x 1/4 x 1 5/8									
020-090-A		18		15 1/4			22 7/8									8 1/4		19 1/8	1 1/2	3 3/4	10	49	43 3/4	14 13/16	17 1/16	3/8 x 3/8 x 2 1/2	3.4				
030-040-A	1 1/2	20 1/4	28 5/8	16 3/8		9 1/4	23 1/8	10 1/4	19 3/8	1 1/2	4 7/8	12	51 1/2	46 1/4	19	21 1/4	1/4 x 1/4 x 1 5/8	3.0													
030-110-B	1 1/2																15 1/4		22 7/8	8 1/4	19 1/8	1 1/2	3 3/4	10	49	43 3/4	14 13/16	17 1/16	3/8 x 3/8 x 2 1/2	3.4	
040-060-A	1 3/16																16 3/8		23 1/8	10 1/4	19 3/8	1 1/2	4 7/8	12	51 1/2	46 1/4	19	21 1/4	3/8 x 3/8 x 2 1/2	4.7	
040-060-B	1 1/2																28 5/8		29 11/16	23 9/16	10 1/4	19 3/8	1 1/2	4 7/8	12	51 1/2	46 1/4	19	21 1/4	3/8 x 3/8 x 2 1/2	4.7
040-130-C	1 11/16	20 1/2	29 1/4	17 1/4			9 1/4	29 11/16	23 9/16	1 1/2	5 3/4	14	14	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6												
040-130-E	1 15/16																	27 3/8		23 3/8	19 5/8	1 1/2	5 3/4	14	49	43 3/4	14 13/16	17 1/16	3/8 x 3/8 x 2 1/2	3.3	
050-070-B	1 1/2																	27 3/8		23 3/8	19 5/8	1 1/2	5 3/4	14	49	43 3/4	14 13/16	17 1/16	3/8 x 3/8 x 2 1/2	3.3	
050-070-C	1 11/16																	28 3/8		29 11/16	23 9/16	12 1/4	23 7/8	1 1/2	5 3/4	14	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8
050-150-E	1 15/16	18	29 1/4	15 5/8				9 1/4	30 1/8	12 1/4	23 7/8	1 15/16	5 3/4	14	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6											
060-250-A	1 3/16																		27 3/8		23 3/8	19 5/8	1 1/2	5 3/4	14	49	43 3/4	14 13/16	17 1/16	3/8 x 3/8 x 2 1/2	3.0
060-250-B	1 1/2																		27 3/8		23 3/8	19 5/8	1 1/2	5 3/4	14	49	43 3/4	14 13/16	17 1/16	3/8 x 3/8 x 2 1/2	3.3
070-270-B	1 1/2																		28 5/8		29 11/16	23 9/16	12 1/4	23 7/8	1 1/2	5 3/4	14	51 1/2	46 1/4	19	21 1/4
070-270-C	1 1/16	20	28 5/8	16 1/4					9 1/4	29 11/16	8 1/4	23 1/4	1 1/16	3 3/4	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6										
071-271-E	1 15/16				29 1/4															23 1/2		1 15/16	3 3/4	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6	
080-290-C	1 1/16				28 5/8															23 1/2		1 15/16	3 3/4	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6	
080-290-E	1 15/16				29 3/4															23 1/2		1 15/16	3 3/4	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6	
081-291-E	2 3/16	22 3/4	29 3/4	18 1/4	9 1/4					29 5/8	23 3/8	1 1/16	4 3/8	12	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6										
081-291-F						29 7/8														23 5/8		2 3/16	4 3/8	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6	
090-310-E						1 15/16														29 3/4		23 9/16	1 15/16	4 3/8	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6
090-310-F						2 3/16														30 3/8		23 9/16	2 3/16	4 3/8	12	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6
091-311-G	2 7/16	22 3/4	30 5/8	19		9 1/4				29 5/8	23 3/8	1 1/16	4 3/8	12	12	51 1/2	46 1/4	19	21 1/4	5/8 x 5/8 x 2 3/4	5.6										
091-311-J							29 7/8													23 5/8		2 3/16	4 3/8	12	51 1/2	46 1/4	19	21 1/4	5/8 x 5/8 x 2 3/4	5.6	
100-330-G							2 7/16													30 5/8		23 9/16	2 7/16	4 3/8	12	51 1/2	46 1/4	19	21 1/4	5/8 x 5/8 x 2 3/4	5.6
100-330-H B J							2 11/16													30 9/16		23 9/16	2 7/16	4 3/8	12	51 1/2	46 1/4	19	21 1/4	5/8 x 5/8 x 2 3/4	5.6
101-321-J	2 11/16	22 3/4	30 9/16	19 7/8			9 1/4			29 13/16	10 1/4	23 9/16	1 15/16	5	5	51 1/2	46 1/4	19	21 1/4	5/8 x 5/8 x 2 1/16	5.6										
061-251-E								1 15/16												29 3/4		23 1/4	1 15/16	3	10	51 1/2	46 1/4	19	21 1/4	1/2 x 1/2 x 2 5/8	5.6

* = CAUTION - MINIMUM SHEAVE SHOWN REFERS TO BLOWER MINIMUM SHEAVE PITCH DIA.
DO NOT USE SHEAVES OF LESS DIA. THAN SHOWN.



DIMENSIONS

ARRANGEMENT 1

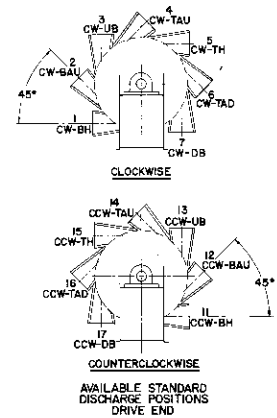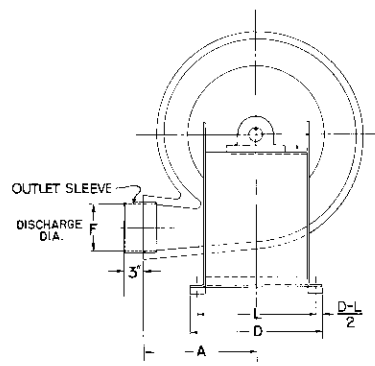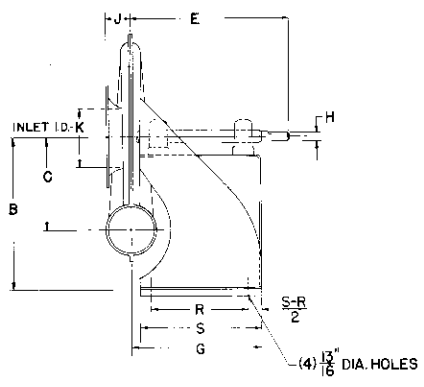

DO NOT USE FOR CONSTRUCTION PURPOSES - CERTIFIED DIMENSIONS AVAILABLE AT TIME OF ORDER

MODEL NUMBER TBABI-	SHAFT SIZE	A	B	C	D	E	F	G	H	J	K	L	R	S	KEYWAY	MINIMUM * SHEAVE DIA.	
010-010-A	1 3/16	12 7/8	24	13	23 1/2	18 11/16	4 1/4	16 1/4	1 3/16	3	8	21	11	15	1/4 x 1/4 x 1 5/8	3.0	
010-080-A		17		13 3/8			6 1/4										3 3/4
020-030-A		18		15 1/4			8 1/4										3 3/4
020-090-A	1 1/2	20 1/4	28 5/16	16 3/8	23 1/2	19 7/8	8 1/4	10 1/4	1 1/2	4 7/8	12	21	19	24	3/8 x 3/8 x 2 1/2	3.4	
030-040-A																	18
030-110-B	1 1/2	20 1/4	28 5/16	16 3/8	23 1/2	19 7/8	8 1/4	10 1/4	1 1/2	4 7/8	12	21	19	24	3/8 x 3/8 x 2 1/2	3.4	
040-060-A	1 3/16																17
040-060-B	1 1/2	20 1/4	28 5/16	16 3/8	23 1/2	19 7/8	8 1/4	10 1/4	1 1/2	4 7/8	12	21	19	24	3/8 x 3/8 x 2 1/2	3.4	
040-130-C	1 11/16																28 5/16
040-130-E	1 11/16	20 1/2	28 5/16	17 1/4	23 1/2	24 9/16	12 1/4	25 7/8	1 11/16	5 3/4	14	21	19	24	1/2 x 1/2 x 2 5/8	5.6	
050-070-B	1 1/2																24
050-070-C	1 11/16	20 1/2	28 5/16	17 1/4	23 1/2	24 9/16	12 1/4	25 7/8	1 11/16	5 3/4	14	21	19	24	1/2 x 1/2 x 2 5/8	5.6	
050-150-E	1 15/16																29 1/8
060-250-A	1 3/8	18	24	15 3/8	23 1/2	18 11/16	6 1/4	16 1/4	1 3/16	3	10	21	11	15	1/4 x 1/4 x 1 5/8	3.0	
060-250-B	1 1/2																18
070-270-B	1 1/2	20	28 5/16	16 1/4	23 1/2	19 7/8	8 1/4	25 1/4	1 1/2	3 3/4	12	21	11	15	3/8 x 3/8 x 2 1/2	3.3	
070-270-C	1 11/16																20
071-271-E	1 15/16	22 3/4	29 1/8	18 1/4	23 1/2	24 13/16	10 1/4	25 3/8	1 15/16	4 3/8	12	21	19	24	1/2 x 1/2 x 2 5/8	5.6	
080-290-C	1 11/16																22 3/4
080-290-E	1 15/16	22 3/4	29 1/8	18 1/4	23 1/2	24 13/16	10 1/4	25 3/8	1 15/16	4 3/8	12	21	19	24	1/2 x 1/2 x 2 5/8	5.6	
081-291-E																	22 3/4
081-291-F	2 3/16	20 1/4	29 3/4	19	23 1/2	25 5/8	10 1/4	25 5/8	2 3/16	5	14	21	19	24	1/2 x 1/2 x 3 1/4	5.6	
090-310-E	1 15/16																20 1/4
090-310-F	2 3/16	20 1/4	29 3/4	19	23 1/2	25 5/8	10 1/4	25 5/8	2 3/16	5	14	21	19	24	1/2 x 1/2 x 3 1/4	5.6	
091-311-G	2 7/16																20 1/4
091-311-J	2 1/16	20 1/4	30 3/16	19	23 1/2	28 5/8	10 1/4	25 5/8	2 1/2	5	14	21	19	24	5/8 x 5/8 x 2 3/4	5.6	
100-330-G	2 7/16																20 1/4
100-330-H & J	2 11/16	20 1/4	30 3/16	19 7/8	23 1/2	29 3/16	10 1/4	25 7/8	2 1/2	6 1/8	14	21	19	24	5/8 x 5/8 x 2 3/4	5.6	
101-321-J																	2 11/16
061-251-E	1 15/16	18	29 1/8	15 5/8	23 1/2	25 1/2	6 1/4	26	1 15/16	3	10	21			1/2 x 1/2 x 2 5/8		

* = CAUTION - MINIMUM SHEAVE SHOWN REFERS TO BLOWER MINIMUM SHEAVE PITCH DIA. DO NOT USE SHEAVES OF LESS DIA. THAN SHOWN.

CAPACITIES

SIZE
TBAB 010-010-A

Impeller Dia. — 18 3/8 in.
 Tip Speed (FPM) — 4.81 x RPM
 Inlet Dia. — 8 in.
 Area — .3491 sq. ft.
 Outlet Dia. — 4 in.
 Area — .0873 sq. ft.

All capacities based on air density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	13" TP		14" TP		15" TP		16" TP		17" TP		18" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
91.	1043.	2754.	0.7	2861.	0.8	2964.	0.9	3063.	1.0	3160.	1.0	3255.	1.1
101.	1155.	2748.	0.7	2854.	0.8	2956.	0.9	3056.	1.0	3152.	1.1	3246.	1.1
111.	1266.	2743.	0.7	2848.	0.8	2950.	0.9	3049.	1.0	3145.	1.1	3239.	1.2
120.	1378.	2739.	0.7	2844.	0.8	2945.	0.9	3043.	1.0	3139.	1.1	3232.	1.2
130.	1490.	2737.	0.8	2841.	0.8	2941.	0.9	3039.	1.0	3134.	1.1	3226.	1.2
140.	1602.	2737.	0.8	2840.	0.9	2939.	0.9	3036.	1.0	3130.	1.1	3222.	1.2
150.	1713.	2738.	0.8	2840.	0.9	2939.	1.0	3035.	1.0	3128.	1.1	3219.	1.2
159.	1825.	2741.	0.8	2842.	0.9	2940.	1.0	3035.	1.1	3128.	1.2	3218.	1.2
169.	1937.	2747.	0.8	2846.	0.9	2943.	1.0	3037.	1.1	3129.	1.2	3218.	1.3
179.	2049.	2753.	0.9	2852.	1.0	2948.	1.0	3041.	1.1	3131.	1.2	3220.	1.3
189.	2160.	2762.	0.9	2859.	1.0	2954.	1.1	3046.	1.2	3136.	1.2	3223.	1.3
198.	2272.	2772.	0.9	2868.	1.0	2962.	1.1	3053.	1.2	3141.	1.3	3228.	1.4
208.	2384.	2783.	1.0	2878.	1.1	2971.	1.1	3061.	1.2	3149.	1.3	3235.	1.4
218.	2496.	2796.	1.0	2890.	1.1	2982.	1.2	3071.	1.3	3158.	1.4	3243.	1.4
228.	2607.	2810.	1.0	2903.	1.1	2994.	1.2	3082.	1.3	3168.	1.4	3252.	1.5
237.	2719.	2825.	1.1	2917.	1.2	3007.	1.3	3094.	1.4	3179.	1.4	3263.	1.5
247.	2831.	2841.	1.1	2932.	1.2	3021.	1.3	3108.	1.4	3192.	1.5	3275.	1.6
257.	2943.	2858.	1.2	2949.	1.3	3037.	1.4	3122.	1.5	3206.	1.5	3288.	1.6
267.	3054.	2875.	1.2	2966.	1.3	3053.	1.4	3138.	1.5	3222.	1.6	3303.	1.7
276.	3166.	2894.	1.3	2983.	1.4	3070.	1.5	3155.	1.6	3238.	1.7	3318.	1.8
286.	3278.	2912.	1.3	3001.	1.4	3089.	1.5	3174.	1.6	3255.	1.7	3335.	1.8
296.	3390.	2931.	1.4	3020.	1.5	3108.	1.6	3192.	1.7	3273.	1.8	3352.	1.9

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
91.	1043.	3347.	1.2	3436.	1.3	3524.	1.4	3610.	1.5	3694.	1.6		
101.	1155.	3338.	1.2	3427.	1.3	3514.	1.4	3600.	1.5	3683.	1.6		
111.	1266.	3330.	1.2	3418.	1.3	3505.	1.4	3590.	1.5	3674.	1.6		
120.	1378.	3322.	1.3	3411.	1.4	3497.	1.5	3582.	1.6	3665.	1.7		
130.	1490.	3316.	1.3	3404.	1.4	3490.	1.5	3574.	1.6	3657.	1.7		
140.	1602.	3312.	1.3	3399.	1.4	3484.	1.5	3568.	1.6	3650.	1.7		
150.	1713.	3308.	1.3	3395.	1.4	3480.	1.5	3563.	1.6	3644.	1.7		
159.	1825.	3306.	1.3	3392.	1.4	3476.	1.5	3559.	1.6	3640.	1.7		
169.	1937.	3306.	1.4	3391.	1.5	3474.	1.6	3556.	1.7	3637.	1.8		
179.	2049.	3307.	1.4	3391.	1.5	3474.	1.6	3555.	1.7	3635.	1.8		
189.	2160.	3309.	1.4	3393.	1.5	3475.	1.6	3556.	1.7	3635.	1.8		
198.	2272.	3313.	1.5	3396.	1.6	3478.	1.7	3558.	1.8	3636.	1.9		
208.	2384.	3319.	1.5	3401.	1.6	3482.	1.7	3561.	1.8	3638.	1.9		
218.	2496.	3326.	1.5	3407.	1.6	3487.	1.7	3565.	1.8	3642.	1.9		
228.	2607.	3334.	1.6	3415.	1.7	3494.	1.8	3572.	1.9	3648.	2.0		
237.	2719.	3345.	1.6	3424.	1.7	3502.	1.8	3579.	1.9	3655.	2.0		
247.	2831.	3356.	1.7	3435.	1.8	3512.	1.9	3588.	2.0	3663.	2.1		
257.	2943.	3368.	1.7	3446.	1.8	3523.	1.9	3598.	2.0	3672.	2.2		
267.	3054.	3382.	1.8	3459.	1.9	3536.	2.0	3609.	2.1	3683.	2.2		
276.	3166.	3397.	1.9	3473.	2.0	3547.	2.1	3622.	2.2	3695.	2.3		
286.	3278.	3412.	1.9	3487.	2.0	3561.	2.1	3635.	2.2	3707.	2.3		
296.	3390.	3428.	2.0	3502.	2.1	3576.	2.2	3649.	2.3				



Impeller Dia. — 20 3/4 in.
 Tip Speed (FPM) — 5.43 x RPM
 Inlet Dia. — 8 in.
 Area — .3491 sq. ft.
 Outlet Dia. — 4 in.
 Area — .0873 sq. ft.

SIZE
 TBAB 010-080-A

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
194.	2223.	2778.	1.3	2851.	1.4	2922.	1.5	2992.	1.6	3060.	1.7	3127.	1.8
209.	2390.	2775.	1.4	2847.	1.5	2918.	1.6	2987.	1.7	3055.	1.8	3122.	1.9
223.	2557.	2773.	1.4	2845.	1.5	2915.	1.6	2984.	1.7	3051.	1.8	3117.	1.9
238.	2724.	2773.	1.5	2844.	1.6	2913.	1.7	2982.	1.8	3048.	1.9	3114.	2.0
252.	2891.	2775.	1.5	2845.	1.6	2914.	1.7	2981.	1.8	3047.	1.9	3112.	2.0
267.	3057.	2778.	1.6	2848.	1.7	2916.	1.8	2982.	1.9	3048.	2.0	3112.	2.1
281.	3224.	2785.	1.6	2853.	1.7	2920.	1.8	2986.	1.9	3050.	2.1	3114.	2.2
296.	3391.	2793.	1.7	2860.	1.8	2926.	1.9	2991.	2.0	3055.	2.1	3117.	2.2
310.	3558.	2804.	1.8	2870.	1.9	2935.	2.0	2998.	2.1	3061.	2.2	3123.	2.3
325.	3724.	2817.	1.8	2882.	1.9	2945.	2.1	3008.	2.2	3070.	2.3	3130.	2.4
339.	3891.	2833.	1.9	2896.	2.0	2958.	2.1	3020.	2.2	3080.	2.3	3140.	2.5
354.	4058.	2851.	2.0	2913.	2.1	2974.	2.2	3034.	2.3	3093.	2.4	3152.	2.5
369.	4225.	2872.	2.1	2932.	2.2	2992.	2.3	3050.	2.4	3109.	2.5	3167.	2.6
383.	4391.	2895.	2.2	2954.	2.3	3013.	2.4	3071.	2.5	3128.	2.6	3184.	2.7
398.	4558.	2923.	2.3	2981.	2.4	3038.	2.5	3094.	2.6	3150.	2.7	3204.	2.9
412.	4725.	2948.	2.4	3004.	2.5	3059.	2.6	3113.	2.7	3168.	2.8	3227.	3.0
427.	4892.	2978.	2.5	3032.	2.6	3086.	2.7	3139.	2.8	3192.	2.9	3244.	3.1
441.	5058.	3011.	2.6	3063.	2.7	3115.	2.8	3167.	2.9	3218.	3.1	3269.	3.2
456.	5225.	3048.	2.7	3098.	2.8	3147.	3.0	3197.	3.1	3247.	3.2	3296.	3.3
470.	5392.	3088.	2.9	3135.	3.0	3182.	3.1	3230.	3.2	3278.	3.3	3325.	3.4
485.	5559.	3119.	3.0	3166.	3.1	3220.	3.2	3265.	3.4	3311.	3.5	3356.	3.6

CFM	OV FT/MIN	25" TP		26" TP		27" TP		28" TP		29" TP		30" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
194.	2223.	3192.	1.9	3257.	2.0	3320.	2.1	3382.	2.2	3442.	2.3	3503.	2.4
209.	2390.	3187.	2.0	3251.	2.1	3314.	2.2	3375.	2.3	3436.	2.4	3496.	2.5
223.	2557.	3182.	2.0	3246.	2.1	3308.	2.2	3370.	2.3	3430.	2.4	3489.	2.5
238.	2724.	3178.	2.1	3242.	2.2	3304.	2.3	3365.	2.4	3425.	2.5	3484.	2.6
252.	2891.	3176.	2.1	3239.	2.2	3301.	2.3	3361.	2.5	3421.	2.6	3480.	2.7
267.	3057.	3175.	2.2	3238.	2.3	3299.	2.4	3359.	2.5	3418.	2.6	3476.	2.7
281.	3224.	3176.	2.3	3238.	2.4	3298.	2.5	3358.	2.6	3417.	2.7	3475.	2.8
296.	3391.	3179.	2.3	3240.	2.4	3300.	2.6	3359.	2.7	3417.	2.8	3474.	2.9
310.	3558.	3184.	2.4	3244.	2.5	3303.	2.6	3361.	2.7	3419.	2.9	3475.	3.0
325.	3724.	3190.	2.5	3249.	2.6	3308.	2.7	3366.	2.8	3422.	2.9	3478.	3.1
339.	3891.	3199.	2.6	3257.	2.7	3315.	2.8	3372.	2.9	3428.	3.0	3483.	3.2
354.	4058.	3210.	2.7	3268.	2.8	3324.	2.9	3380.	3.0	3435.	3.1	3489.	3.2
369.	4225.	3224.	2.8	3280.	2.9	3335.	3.0	3390.	3.1	3446.	3.2	3498.	3.3
383.	4391.	3240.	2.9	3295.	3.0	3349.	3.1	3402.	3.2	3458.	3.4	3508.	3.4
398.	4558.	3258.	3.0	3311.	3.1	3364.	3.2	3416.	3.3	3469.	3.4	3521.	3.6
412.	4725.	3279.	3.1	3330.	3.2	3381.	3.3	3433.	3.4	3484.	3.5	3535.	3.7
427.	4892.	3302.	3.2	3351.	3.3	3400.	3.4	3455.	3.6	3501.	3.7	3552.	3.8
441.	5058.	3326.	3.3	3374.	3.4	3421.	3.5	3471.	3.7	3521.	3.8	3571.	3.9
456.	5225.	3352.	3.5	3397.	3.6	3449.	3.7	3494.	3.8	3544.	3.9	3593.	4.1
470.	5392.	3379.	3.6	3421.	3.7	3470.	3.8	3520.	3.9	3569.	4.1	3617.	4.2
485.	5559.	3405.	3.7	3458.	3.9	3500.	4.0	3549.	4.1	3597.	4.2	3636.	4.3

Impeller Dia. — 19 in.
 Tip Speed (FPM) — 4.97 x RPM
 Inlet Dia. — 8 in.
 Area — .3491 sq. ft.
 Outlet Dia. — 6 in.
 Area — .1963 sq. ft.

SIZE
 TBAB 020-030-A

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	13" TP		14" TP		15" TP		16" TP		17" TP		18" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
241.	1225.	2553.	1.0	2646.	1.1	2735.	1.2	2822.	1.3	2906.	1.4	2988.	1.6
260.	1324.	2561.	1.1	2653.	1.2	2742.	1.3	2828.	1.4	2912.	1.5	2993.	1.6
280.	1424.	2570.	1.1	2661.	1.2	2749.	1.4	2835.	1.5	2918.	1.6	2999.	1.7
299.	1523.	2580.	1.2	2670.	1.3	2758.	1.4	2843.	1.5	2926.	1.6	3006.	1.8
319.	1622.	2591.	1.3	2681.	1.4	2768.	1.5	2853.	1.6	2935.	1.7	3015.	1.8
338.	1722.	2603.	1.3	2693.	1.4	2779.	1.5	2863.	1.7	2945.	1.8	3024.	1.9
358.	1821.	2617.	1.4	2706.	1.5	2791.	1.6	2875.	1.7	2956.	1.8	3035.	2.0
377.	1920.	2631.	1.4	2719.	1.6	2805.	1.7	2887.	1.8	2968.	1.9	3046.	2.0
397.	2020.	2647.	1.5	2734.	1.6	2819.	1.7	2901.	1.9	2981.	2.0	3059.	2.1
416.	2119.	2663.	1.6	2749.	1.7	2834.	1.8	2915.	1.9	2995.	2.1	3072.	2.2
436.	2218.	2680.	1.6	2766.	1.8	2849.	1.9	2930.	2.0	3009.	2.2	3086.	2.3
455.	2318.	2697.	1.7	2783.	1.8	2866.	2.0	2946.	2.1	3025.	2.2	3101.	2.4
475.	2417.	2716.	1.8	2800.	1.9	2883.	2.1	2963.	2.2	3041.	2.3	3118.	2.5
494.	2516.	2735.	1.9	2819.	2.0	2901.	2.1	2980.	2.3	3059.	2.4	3135.	2.6
514.	2616.	2755.	1.9	2838.	2.1	2920.	2.2	2999.	2.4	3077.	2.5	3153.	2.7
533.	2715.	2775.	2.0	2858.	2.2	2939.	2.3	3019.	2.5	3096.	2.6	3171.	2.8
553.	2814.	2796.	2.1	2878.	2.3	2960.	2.4	3040.	2.6	3116.	2.7	3190.	2.9
572.	2914.	2817.	2.2	2901.	2.4	2983.	2.5	3061.	2.7	3137.	2.9	3210.	3.0
592.	3013.	2840.	2.3	2925.	2.5	3006.	2.6	3076.	2.8	3151.	2.9	3230.	3.1
611.	3112.	2866.	2.4	2942.	2.5	3021.	2.7	3097.	2.9	3172.	3.0	3245.	3.2
631.	3212.	2884.	2.5	2964.	2.7	3043.	2.8	3119.	3.0	3193.	3.2	3265.	3.3
650.	3311.	2907.	2.6	2987.	2.8	3065.	2.9	3140.	3.1	3214.	3.3	3286.	3.4

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
241.	1225.	3068.	1.7	3146.	1.8	3222.	1.9	3297.	2.0	3370.	2.1	3441.	2.2
260.	1324.	3073.	1.7	3150.	1.8	3226.	2.0	3300.	2.1	3372.	2.2	3443.	2.3
280.	1424.	3078.	1.8	3155.	1.9	3230.	2.0	3304.	2.1	3376.	2.3	3447.	2.4
299.	1523.	3085.	1.9	3161.	2.0	3236.	2.1	3309.	2.2	3381.	2.4	3452.	2.5
319.	1622.	3093.	1.9	3169.	2.1	3243.	2.2	3316.	2.3	3387.	2.4	3458.	2.6
338.	1722.	3102.	2.0	3177.	2.1	3251.	2.3	3324.	2.4	3394.	2.5	3464.	2.7
358.	1821.	3112.	2.1	3187.	2.2	3260.	2.4	3332.	2.5	3403.	2.6	3471.	2.7
377.	1920.	3123.	2.2	3197.	2.3	3271.	2.4	3342.	2.6	3412.	2.7	3480.	2.8
397.	2020.	3135.	2.3	3209.	2.4	3282.	2.5	3353.	2.7	3422.	2.8	3490.	2.9
416.	2119.	3147.	2.3	3221.	2.5	3294.	2.6	3364.	2.8	3434.	2.9	3501.	3.0
436.	2218.	3161.	2.4	3235.	2.6	3307.	2.7	3376.	2.9	3447.	3.0	3512.	3.1
455.	2318.	3176.	2.5	3249.	2.7	3320.	2.8	3390.	3.0	3458.	3.1	3525.	3.3
475.	2417.	3192.	2.6	3264.	2.8	3335.	2.9	3403.	3.1	3471.	3.2	3538.	3.4
494.	2516.	3209.	2.7	3280.	2.9	3350.	3.0	3418.	3.2	3485.	3.3	3552.	3.5
514.	2616.	3226.	2.8	3297.	3.0	3366.	3.1	3434.	3.3	3501.	3.4	3567.	3.6
533.	2715.	3243.	2.9	3314.	3.1	3382.	3.2	3453.	3.4	3516.	3.6	3582.	3.7
553.	2814.	3262.	3.0	3331.	3.2	3399.	3.4	3466.	3.5	3533.	3.7	3598.	3.8
572.	2914.	3281.	3.2	3349.	3.3	3416.	3.5	3483.	3.6	3550.	3.8	3615.	4.0
592.	3013.	3300.	3.3	3368.	3.4	3436.	3.6	3502.	3.8	3568.	3.9	3633.	4.1
611.	3112.	3320.	3.4	3387.	3.5	3458.	3.7	3520.	3.9	3586.	4.1	3651.	4.2
631.	3212.	3340.	3.5	3405.	3.7	3472.	3.8	3540.	4.0	3606.	4.2	3671.	4.4
650.	3311.	3360.	3.6	3424.	3.8	3493.	4.0	3560.	4.2	3626.	4.3	3691.	4.5



Impeller Dia. — 21 1/8 in.
 Tip Speed (FPM) — 5.53 x RPM
 Inlet Dia. — 8 in.
 Area — .3491 sq. ft.
 Outlet Dia. — 6 in.
 Area — .1963 sq. ft.

SIZE
 TBAB 020-090-A

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
380.	1936.	2857.	2.1	2929.	2.3	2999.	2.4	3068.	2.5	3135.	2.7	3201.	2.8
409.	2081.	2863.	2.2	2934.	2.4	3004.	2.5	3072.	2.7	3139.	2.8	3204.	2.9
437.	2226.	2870.	2.4	2941.	2.5	3010.	2.6	3078.	2.8	3144.	2.9	3209.	3.1
466.	2371.	2879.	2.5	2949.	2.6	3018.	2.8	3085.	2.9	3150.	3.1	3215.	3.2
494.	2516.	2889.	2.6	2959.	2.7	3027.	2.9	3093.	3.0	3158.	3.2	3222.	3.3
523.	2662.	2901.	2.7	2970.	2.9	3037.	3.0	3103.	3.2	3168.	3.3	3231.	3.5
551.	2807.	2913.	2.8	2982.	3.0	3049.	3.1	3114.	3.3	3178.	3.5	3241.	3.6
580.	2952.	2927.	3.0	2995.	3.1	3061.	3.3	3126.	3.5	3190.	3.6	3252.	3.8
608.	3097.	2941.	3.1	3009.	3.3	3075.	3.4	3139.	3.6	3203.	3.8	3265.	3.9
637.	3242.	2956.	3.2	3023.	3.4	3089.	3.6	3153.	3.8	3216.	3.9	3278.	4.1
665.	3387.	2972.	3.4	3039.	3.6	3104.	3.7	3168.	3.9	3231.	4.1	3292.	4.3
694.	3533.	2987.	3.5	3054.	3.7	3119.	3.9	3183.	4.1	3246.	4.3	3307.	4.5
722.	3678.	3003.	3.7	3070.	3.8	3135.	4.0	3199.	4.2	3262.	4.4	3323.	4.6
751.	3823.	3019.	3.8	3086.	4.0	3151.	4.2	3216.	4.4	3278.	4.6	3339.	4.8
779.	3968.	3034.	3.9	3101.	4.1	3168.	4.4	3232.	4.6	3294.	4.8	3355.	5.0
808.	4113.	3049.	4.1	3117.	4.3	3184.	4.5	3248.	4.7	3310.	5.0	3371.	5.2
836.	4259.	3063.	4.2	3132.	4.5	3199.	4.7	3264.	4.9	3326.	5.1	3387.	5.4
865.	4404.	3076.	4.4	3146.	4.6	3213.	4.8	3279.	5.1	3341.	5.3	3402.	5.5
893.	4549.	3087.	4.5	3158.	4.7	3227.	5.0	3292.	5.2	3356.	5.5	3417.	5.7
922.	4694.	3097.	4.6	3169.	4.9	3239.	5.1	3305.	5.4	3369.	5.6	3431.	5.9
950.	4839.	3104.	4.7	3178.	5.0	3249.	5.3	3317.	5.5	3382.	5.8	3444.	6.1

CFM	OV FT/MIN	25" TP		26" TP		27" TP		28" TP		29" TP		30" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
380.	1936.	3265.	3.0	3329.	3.1	3391.	3.2	3452.	3.4	3512.	3.5	3571.	3.7
409.	2081.	3268.	3.1	3331.	3.2	3393.	3.4	3454.	3.5	3513.	3.7	3572.	3.8
437.	2226.	3272.	3.2	3335.	3.4	3396.	3.5	3456.	3.7	3516.	3.8	3574.	4.0
466.	2371.	3278.	3.4	3340.	3.5	3401.	3.7	3461.	3.8	3520.	4.0	3578.	4.1
494.	2516.	3285.	3.5	3347.	3.7	3407.	3.8	3466.	4.0	3525.	4.1	3582.	4.3
523.	2662.	3293.	3.6	3354.	3.8	3414.	4.0	3474.	4.1	3532.	4.3	3589.	4.5
551.	2807.	3303.	3.8	3364.	4.0	3423.	4.1	3482.	4.3	3540.	4.5	3596.	4.6
580.	2952.	3314.	4.0	3374.	4.1	3433.	4.3	3491.	4.5	3549.	4.7	3605.	4.8
608.	3097.	3326.	4.1	3386.	4.3	3444.	4.5	3502.	4.7	3560.	4.9	3615.	5.0
637.	3242.	3339.	4.3	3398.	4.5	3456.	4.7	3514.	4.8	3570.	5.0	3626.	5.2
665.	3387.	3353.	4.5	3412.	4.7	3469.	4.8	3526.	5.0	3582.	5.2	3637.	5.4
694.	3533.	3367.	4.6	3426.	4.8	3483.	5.0	3540.	5.2	3595.	5.4	3650.	5.6
722.	3678.	3382.	4.8	3441.	5.0	3497.	5.2	3556.	5.4	3609.	5.6	3664.	5.8
751.	3823.	3398.	5.0	3456.	5.2	3512.	5.4	3568.	5.6	3624.	5.8	3678.	6.0
779.	3968.	3414.	5.2	3471.	5.4	3527.	5.6	3583.	5.8	3639.	6.0	3693.	6.2
808.	4113.	3430.	5.4	3487.	5.6	3544.	5.8	3599.	6.0	3654.	6.2	3708.	6.4
836.	4259.	3445.	5.6	3502.	5.8	3562.	6.0	3615.	6.2	3670.	6.4		
865.	4404.	3461.	5.8	3518.	6.0	3575.	6.2	3631.	6.4	3686.	6.7		
893.	4549.	3476.	5.9	3533.	6.2	3590.	6.4	3647.	6.6	3702.	6.9		
922.	4694.	3490.	6.1	3550.	6.4	3606.	6.6	3662.	6.8				
950.	4839.	3504.	6.3	3567.	6.6	3621.	6.8	3678.	7.1				

Impeller Dia. — 17 1/2 in.
 Tip Speed (FPM) — 4.58 x RPM
 Inlet Dia. — 10 in.
 Area — .5454 sq. ft.
 Outlet Dia. — 8 in.
 Area — .3491 sq. ft.

SIZE
 TBAB 030-040-A

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	13" TP		14" TP		15" TP		16" TP		17" TP		18" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
500.	1431.	2675.	1.6	2778.	1.8								
540.	1547.	2673.	1.7	2773.	1.9	2871.	2.0	2967.	2.2	3060.	2.4		
581.	1663.	2675.	1.8	2773.	2.0	2869.	2.1	2963.	2.3	3054.	2.5		
621.	1779.	2681.	1.9	2777.	2.1	2871.	2.2	2962.	2.4	3052.	2.6	3140.	2.8
662.	1895.	2691.	2.0	2785.	2.2	2876.	2.3	2966.	2.5	3054.	2.7	3140.	2.9
702.	2011.	2704.	2.1	2796.	2.3	2886.	2.5	2974.	2.6	3060.	2.8	3144.	3.0
743.	2128.	2720.	2.2	2810.	2.4	2899.	2.6	2985.	2.8	3069.	3.0	3151.	3.1
783.	2244.	2739.	2.4	2828.	2.6	2914.	2.7	2999.	2.9	3081.	3.1	3162.	3.3
824.	2360.	2760.	2.5	2847.	2.7	2932.	2.9	3015.	3.1	3096.	3.3	3176.	3.4
864.	2476.	2782.	2.7	2868.	2.8	2952.	3.0	3034.	3.2	3114.	3.4	3192.	3.6
905.	2592.	2805.	2.8	2891.	3.0	2974.	3.2	3054.	3.4	3133.	3.6	3211.	3.8
945.	2708.	2829.	2.9	2914.	3.1	2996.	3.4	3076.	3.6	3156.	3.8	3232.	4.0
986.	2824.	2853.	3.1	2938.	3.3	3021.	3.5	3102.	3.7	3180.	4.0	3255.	4.2
1026.	2940.	2877.	3.2	2963.	3.5	3047.	3.7	3128.	3.9	3205.	4.2	3280.	4.4
1067.	3056.	2900.	3.4	2989.	3.6	3073.	3.9	3147.	4.1	3223.	4.3	3298.	4.6
1107.	3172.	2922.	3.5	3013.	3.8	3091.	4.0	3171.	4.3	3248.	4.5	3322.	4.8
1148.	3288.	2941.	3.7	3035.	4.0	3114.	4.2	3194.	4.5	3272.	4.7	3346.	5.0
1188.	3404.	2957.	3.8	3054.	4.1	3135.	4.4	3217.	4.6	3295.	4.9	3370.	5.2
1229.	3520.	2967.	3.9	3068.	4.3	3154.	4.5	3238.	4.8	3317.	5.1	3393.	5.4
1269.	3636.	2971.	4.0	3078.	4.4	3170.	4.7	3257.	5.0	3338.	5.3	3421.	5.6
1310.	3752.	2964.	4.1	3082.	4.5	3185.	4.9	3273.	5.2	3362.	5.5	3440.	5.8
1350.	3868.	2936.	4.0	3078.	4.5	3189.	4.9	3288.	5.3	3376.	5.7	3457.	6.0

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
500.	1431.												
540.	1547.												
581.	1663.												
621.	1779.												
662.	1895.	3224.	3.1	3307.	3.2	3388.	3.4						
702.	2011.	3227.	3.2	3308.	3.4	3388.	3.6	3466.	3.8	3543.	4.0		
743.	2128.	3233.	3.3	3312.	3.5	3390.	3.7	3467.	3.9	3543.	4.1	3618.	4.3
783.	2244.	3242.	3.5	3320.	3.7	3397.	3.9	3472.	4.1	3547.	4.3	3620.	4.5
824.	2360.	3254.	3.6	3331.	3.8	3406.	4.0	3480.	4.2	3554.	4.5	3625.	4.7
864.	2476.	3269.	3.8	3345.	4.0	3419.	4.2	3491.	4.4	3565.	4.7	3633.	4.8
905.	2592.	3287.	4.0	3361.	4.2	3434.	4.4	3505.	4.6	3575.	4.8	3645.	5.0
945.	2708.	3307.	4.2	3380.	4.4	3451.	4.6	3520.	4.8	3590.	5.0	3658.	5.3
986.	2824.	3329.	4.4	3400.	4.6	3470.	4.8	3538.	5.0	3607.	5.2	3674.	5.5
1026.	2940.	3352.	4.6	3422.	4.8	3490.	5.0	3561.	5.3	3625.	5.5	3692.	5.7
1067.	3056.	3375.	4.8	3444.	5.0	3511.	5.2	3579.	5.5	3646.	5.7	3712.	6.0
1107.	3172.	3399.	5.0	3467.	5.3	3532.	5.5	3601.	5.7	3668.	6.0		
1148.	3288.	3423.	5.3	3490.	5.5	3561.	5.7	3625.	6.0	3691.	6.2		
1188.	3404.	3447.	5.5	3513.	5.7	3581.	5.9	3649.	6.2				
1229.	3520.	3469.	5.7	3536.	5.9	3606.	6.2	3674.	6.5				
1269.	3636.	3491.	5.9	3566.	6.2	3630.	6.4	3699.	6.7				
1310.	3752.	3512.	6.1	3583.	6.4	3654.	6.7						
1350.	3868.	3531.	6.3	3605.	6.6	3677.	6.9						



HALLUX®

Impeller Dia. — 20 3/4 in.
 Tip Speed (FPM) — 5.43 x RPM
 Inlet Dia. — 10 in.
 Area — .5454 sq. ft.
 Outlet Dia. — 8 in.
 Area — .3491 sq. ft.

SIZE
 TBAB 030-110-B

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
780.	2235.	2767.	3.6	2839.	3.8								
839.	2403.	2768.	3.8	2838.	4.0	2907.	4.2	2975.	4.4				
897.	2570.	2772.	4.0	2841.	4.2	2909.	4.4	2975.	4.6	3040.	4.9	3104.	5.1
956.	2738.	2778.	4.2	2846.	4.4	2913.	4.6	2979.	4.9	3043.	5.1	3106.	5.4
1014.	2905.	2778.	4.4	2855.	4.6	2920.	4.9	2985.	5.1	3048.	5.4	3110.	5.6
1073.	3073.	2800.	4.7	2865.	4.9	2930.	5.1	2994.	5.4	3056.	5.7	3117.	5.9
1131.	3241.	2814.	4.9	2879.	5.2	2942.	5.4	3005.	5.7	3066.	5.9	3126.	6.2
1190.	3408.	2830.	5.2	2894.	5.4	2956.	5.7	3018.	6.0	3078.	6.2	3138.	6.5
1248.	3576.	2848.	5.5	2911.	5.7	2972.	6.0	3033.	6.3	3093.	6.5	3152.	6.8
1307.	3744.	2866.	5.7	2929.	6.0	2990.	6.3	3050.	6.6	3109.	6.9	3167.	7.1
1365.	3911.	2886.	6.0	2948.	6.3	3009.	6.6	3068.	6.9	3126.	7.2	3184.	7.5
1424.	4079.	2907.	6.3	2969.	6.6	3029.	6.9	3088.	7.2	3146.	7.6	3204.	7.9
1482.	4246.	2929.	6.7	2990.	7.0	3050.	7.3	3110.	7.6	3168.	7.9	3224.	8.3
1541.	4414.	2950.	7.0	3012.	7.3	3073.	7.7	3132.	8.0	3190.	8.3	3246.	8.7
1599.	4582.	2973.	7.3	3036.	7.7	3097.	8.0	3155.	8.4	3212.	8.7	3268.	9.1
1658.	4749.	2996.	7.7	3059.	8.1	3120.	8.4	3172.	8.7	3229.	9.0	3284.	9.4
1716.	4917.	3018.	8.0	3075.	8.3	3135.	8.7	3194.	9.1	3250.	9.4	3306.	9.8
1775.	5085.	3038.	8.4	3096.	8.7	3157.	9.1	3215.	9.4	3272.	9.8	3327.	10.2
1833.	5252.	3057.	8.7	3115.	9.0	3177.	9.4	3236.	9.8	3293.	10.2	3349.	10.6
1892.	5420.	3072.	9.0	3133.	9.3	3196.	9.8	3256.	10.2	3314.	10.6	3370.	11.0
1950.	5587.	3085.	9.3	3149.	9.7	3213.	10.1	3274.	10.6	3333.	11.0	3396.	11.5

CFM	OV FT/MIN	25" TP		26" TP		27" TP		28" TP		29" TP		30" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
780.	2235.												
839.	2403.												
897.	2570.	3168.	5.4	3230.	5.6	3291.	5.8	3351.	6.1	3410.	6.3	3468.	6.6
956.	2738.	3168.	5.6	3229.	5.9	3289.	6.1	3349.	6.4	3407.	6.6	3465.	6.9
1014.	2905.	3171.	5.9	3232.	6.1	3291.	6.4	3349.	6.7	3407.	6.9	3464.	7.2
1073.	3073.	3177.	6.2	3237.	6.4	3295.	6.7	3353.	7.0	3410.	7.2	3466.	7.5
1131.	3241.	3186.	6.5	3244.	6.7	3302.	7.0	3359.	7.3	3415.	7.5	3470.	7.8
1190.	3408.	3197.	6.8	3254.	7.0	3311.	7.3	3367.	7.6	3422.	7.9	3477.	8.2
1248.	3576.	3209.	7.1	3266.	7.4	3322.	7.7	3378.	8.0	3432.	8.2	3486.	8.5
1307.	3744.	3224.	7.4	3280.	7.7	3336.	8.0	3390.	8.3	3444.	8.6	3497.	8.9
1365.	3911.	3241.	7.8	3297.	8.1	3351.	8.4	3405.	8.7	3458.	9.0	3510.	9.3
1424.	4079.	3260.	8.2	3314.	8.5	3368.	8.8	3421.	9.1	3473.	9.4	3525.	9.7
1482.	4246.	3279.	8.6	3334.	8.9	3387.	9.2	3439.	9.5	3489.	9.8	3543.	10.2
1541.	4414.	3300.	9.0	3354.	9.3	3406.	9.6	3457.	9.9	3507.	10.2	3558.	10.5
1599.	4582.	3322.	9.4	3374.	9.7	3426.	10.0	3476.	10.3	3527.	10.7	3576.	11.0
1658.	4749.	3344.	9.8	3396.	10.1	3446.	10.5	3496.	10.8	3551.	11.2	3596.	11.4
1716.	4917.	3365.	10.2	3417.	10.6	3467.	10.9	3516.	11.2	3567.	11.6	3617.	11.9
1775.	5085.	3387.	10.7	3438.	11.0	3488.	11.3	3541.	11.7	3588.	12.0	3638.	12.4
1833.	5252.	3408.	11.1	3459.	11.4	3509.	11.7	3559.	12.1	3610.	12.5	3660.	12.9
1892.	5420.	3429.	11.5	3480.	11.8	3532.	12.2	3582.	12.6	3633.	13.0	3683.	13.4
1950.	5587.	3449.	11.9	3500.	12.3	3551.	12.7	3604.	13.1	3655.	13.5	3706.	14.0

Impeller Dia. — 17 5/8 in.
 Tip Speed (FPM) — 4.61 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 10 in.
 Area — .5454 sq. ft.

SIZE
 TBAB 040-060-B

All capacities based on air density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	13" TP		14" TP		15" TP		16" TP		17" TP		18" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1073.	1968.	2633.	3.6	2734.	4.0								
1160.	2127.	2633.	3.7	2731.	4.1	2826.	4.5						
1247.	2287.	2639.	3.9	2734.	4.3	2827.	4.6	2918.	5.0	3007.	5.4		
1334.	2446.	2650.	4.1	2743.	4.4	2833.	4.8	2921.	5.2	3008.	5.6	3093.	6.0
1421.	2606.	2666.	4.3	2756.	4.6	2843.	5.0	2929.	5.4	3014.	5.8	3097.	6.2
1508.	2765.	2686.	4.5	2773.	4.9	2858.	5.2	2942.	5.6	3024.	6.0	3105.	6.4
1595.	2925.	2709.	4.7	2794.	5.1	2877.	5.5	2959.	5.9	3039.	6.3	3118.	6.7
1682.	3084.	2735.	5.0	2818.	5.4	2900.	5.7	2979.	6.1	3058.	6.6	3135.	7.0
1769.	3244.	2764.	5.3	2845.	5.6	2925.	6.0	3003.	6.4	3079.	6.8	3154.	7.3
1856.	3404.	2795.	5.6	2875.	5.9	2953.	6.3	3029.	6.7	3105.	7.2	3179.	7.6
1943.	3563.	2827.	5.9	2905.	6.3	2984.	6.7	3061.	7.1	3135.	7.6	3208.	8.0
2030.	3723.	2861.	6.2	2943.	6.7	3013.	7.0	3087.	7.4	3160.	7.9	3231.	8.3
2117.	3882.	2893.	6.5	2971.	6.9	3046.	7.4	3119.	7.8	3190.	8.3	3260.	8.7
2204.	4042.	2927.	6.9	3005.	7.3	3080.	7.8	3152.	8.2	3223.	8.7	3292.	9.1
2291.	4201.	2961.	7.2	3039.	7.7	3114.	8.2	3186.	8.6	3256.	9.1	3324.	9.5
2378.	4361.	2995.	7.6	3074.	8.1	3148.	8.6	3220.	9.0	3290.	9.5	3357.	10.0
2465.	4520.	3028.	8.0	3107.	8.5	3183.	9.0	3255.	9.5	3324.	10.0	3391.	10.5
2552.	4680.	3059.	8.3	3140.	8.9	3216.	9.4	3289.	9.9	3359.	10.4	3425.	10.9
2639.	4839.	3087.	8.7	3171.	9.3	3249.	9.8	3323.	10.4	3392.	10.9	3467.	11.5
2726.	4999.	3113.	9.1	3200.	9.7	3280.	10.3	3355.	10.8	3425.	11.4	3496.	12.0
2813.	5159.	3135.	9.4	3226.	10.0	3309.	10.7	3385.	11.3	3457.	11.9	3526.	12.4
2900.	5318.	3152.	9.7	3249.	10.4	3335.	11.1	3414.	11.7	3492.	12.4	3560.	13.0

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1073.	1968.												
1160.	2127.												
1247.	2287.												
1334.	2446.	3176.	6.4										
1421.	2606.	3178.	6.6	3258.	7.0	3337.	7.5						
1508.	2765.	3185.	6.9	3263.	7.3	3340.	7.7	3415.	8.2	3490.	8.6	3564.	9.1
1595.	2925.	3195.	7.1	3272.	7.5	3347.	8.0	3421.	8.4	3494.	8.9	3566.	9.4
1682.	3084.	3210.	7.4	3285.	7.8	3358.	8.3	3430.	8.7	3502.	9.2	3572.	9.6
1769.	3244.	3229.	7.7	3302.	8.1	3374.	8.6	3444.	9.0	3513.	9.5	3582.	10.0
1856.	3404.	3252.	8.1	3323.	8.5	3393.	8.9	3461.	9.4	3529.	9.9	3596.	10.3
1943.	3563.	3278.	8.4	3347.	8.9	3414.	9.3	3481.	9.8	3551.	10.3	3613.	10.7
2030.	3723.	3307.	8.8	3373.	9.3	3439.	9.7	3503.	10.1	3568.	10.6	3633.	11.1
2117.	3882.	3329.	9.2	3402.	9.7	3465.	10.1	3529.	10.6	3592.	11.0	3657.	11.5
2204.	4042.	3359.	9.6	3431.	10.1	3492.	10.5	3555.	11.0	3619.	11.5	3683.	12.0
2291.	4201.	3391.	10.0	3461.	10.6	3520.	11.0	3585.	11.5	3649.	12.0	3712.	12.5
2378.	4361.	3423.	10.5	3491.	11.0	3552.	11.5	3617.	12.0	3681.	12.5		
2465.	4520.	3464.	11.1	3520.	11.4	3586.	12.0	3651.	12.5	3707.	13.0		
2552.	4680.	3494.	11.5	3555.	12.0	3622.	12.5	3679.	13.0				
2639.	4839.	3524.	11.9	3592.	12.5	3651.	13.0	3713.	13.6				
2726.	4999.	3560.	12.5	3630.	13.1	3687.	13.6						
2813.	5159.	3597.	13.1	3658.	13.6	3722.	14.2						
2900.	5318.	3634.	13.7	3693.	14.2								



Impeller Dia. — 20 3/4 in.
 Tip Speed (FPM) — 5.43 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 10 in.
 Area — .5454 sq. ft.

SIZE
 TBAB 040-130-E

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1520.	2787.	2697.	7.1	2769.	7.5	2839.	8.0						
1634.	2996.	2692.	7.4	2762.	7.8	2831.	8.3	2899.	8.8	2966.	9.3	3031.	9.8
1748.	3206.	2692.	7.7	2760.	8.2	2827.	8.7	2894.	9.2	2959.	9.6	3023.	10.1
1862.	3415.	2696.	8.1	2762.	8.6	2828.	9.1	2893.	9.6	2957.	10.1	3020.	10.6
1976.	3624.	2704.	8.6	2769.	9.0	2833.	9.5	2896.	10.0	2959.	10.5	3020.	11.0
2090.	3833.	2715.	9.0	2779.	9.5	2842.	10.0	2903.	10.5	2964.	11.0	3024.	11.5
2204.	4042.	2730.	9.5	2792.	10.0	2853.	10.5	2914.	11.0	2973.	11.5	3032.	12.0
2318.	4251.	2747.	10.0	2808.	10.5	2868.	11.0	2927.	11.5	2986.	12.0	3043.	12.6
2432.	4460.	2766.	10.5	2826.	11.1	2885.	11.6	2943.	12.1	3001.	12.6	3057.	13.2
2546.	4669.	2787.	11.1	2846.	11.6	2905.	12.2	2962.	12.7	3018.	13.3	3073.	13.8
2660.	4878.	2810.	11.7	2868.	12.3	2926.	12.8	2982.	13.3	3037.	13.9	3092.	14.5
2774.	5087.	2833.	12.3	2891.	12.9	2948.	13.5	3004.	14.0	3060.	14.6	3114.	15.2
2888.	5296.	2857.	13.0	2915.	13.6	2973.	14.2	3029.	14.8	3084.	15.4	3138.	16.0
3002.	5505.	2883.	13.7	2943.	14.3	3000.	15.0	3056.	15.6	3104.	16.0	3156.	16.7
3116.	5714.	2910.	14.5	2963.	15.0	3019.	15.6	3074.	16.2	3127.	16.8	3180.	17.4
3230.	5923.	2929.	15.0	2987.	15.7	3044.	16.3	3098.	17.0	3152.	17.6	3204.	18.3
3344.	6132.	2952.	15.7	3011.	16.4	3068.	17.1	3123.	17.8	3176.	18.4	3228.	19.1
3458.	6341.	2973.	16.4	3033.	17.1	3091.	17.9	3146.	18.6	3200.	19.3	3253.	20.0
3572.	6550.	2992.	17.1	3054.	17.9	3113.	18.6	3169.	19.4	3224.	20.1	3277.	20.8
3686.	6759.	3008.	17.8	3072.	18.6	3133.	19.4	3191.	20.2	3246.	21.0	3300.	21.7
3800.	6968.	3022.	18.6	3087.	19.3	3151.	20.1	3210.	21.0	3267.	21.8	3322.	22.6

CFM	OV FT/MIN	25" TP		26" TP		27" TP		28" TP		29" TP		30" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1520.	2787.												
1634.	2996.												
1748.	3206.	3087.	10.6	3149.	11.1								
1862.	3415.	3082.	11.1	3143.	11.6	3203.	12.1	3262.	12.6	3321.	13.2	3379.	13.7
1976.	3624.	3081.	11.5	3140.	12.0	3199.	12.6	3258.	13.1	3315.	13.6	3372.	14.2
2090.	3833.	3084.	12.0	3142.	12.5	3200.	13.1	3257.	13.6	3313.	14.2	3369.	14.7
2204.	4042.	3090.	12.5	3147.	13.1	3204.	13.6	3260.	14.2	3315.	14.7	3369.	15.3
2318.	4251.	3100.	13.1	3156.	13.6	3211.	14.2	3266.	14.8	3320.	15.3	3373.	15.9
2432.	4460.	3113.	13.7	3168.	14.3	3222.	14.8	3275.	15.4	3328.	16.0	3381.	16.5
2546.	4669.	3128.	14.3	3182.	14.9	3235.	15.5	3288.	16.1	3340.	16.7	3391.	17.2
2660.	4878.	3146.	15.1	3200.	15.6	3252.	16.2	3303.	16.8	3354.	17.4	3404.	18.0
2774.	5087.	3167.	15.8	3219.	16.4	3270.	17.0	3321.	17.6	3370.	18.1	3419.	18.7
2888.	5296.	3190.	16.6	3241.	17.2	3291.	17.8	3340.	18.4	3389.	18.9	3436.	19.5
3002.	5505.	3213.	17.5	3264.	18.0	3313.	18.6	3361.	19.2	3408.	19.8	3456.	20.4
3116.	5714.	3231.	18.1	3287.	18.9	3335.	19.5	3383.	20.1	3429.	20.6	3481.	21.4
3230.	5923.	3255.	18.9	3311.	19.8	3359.	20.4	3405.	20.9	3450.	21.5	3498.	22.2
3344.	6132.	3279.	19.8	3335.	20.7	3382.	21.2	3427.	21.8	3479.	22.6	3521.	23.1
3458.	6341.	3304.	20.6	3359.	21.6	3405.	22.1	3450.	22.7	3498.	23.4	3546.	24.1
3572.	6550.	3328.	21.5	3383.	22.4	3428.	23.0	3481.	23.9	3523.	24.4	3571.	25.2
3686.	6759.	3358.	22.7	3405.	23.3	3451.	23.9	3500.	24.7	3549.	25.5	3597.	26.3
3800.	6968.	3379.	23.6	3427.	24.2	3481.	25.2	3525.	25.7	3574.	26.6	3622.	27.4

Impeller Dia. — 18 1/8 in.
 Tip Speed (FPM) — 4.74 x RPM
 Inlet Dia. — 14 in.
 Area — 1.069 sq. ft.
 Outlet Dia. — 12 in.
 Area — .7853 sq. ft.

SIZE
 TBAB 050-070-C

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	13" TP		14" TP		15" TP		16" TP		17" TP		18" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1480.	1885.	2610.	5.5	2706.	6.1	2800.	6.6	2891.	7.2	2979.	7.8	3064.	8.4
1600.	2038.	2614.	5.7	2710.	6.3	2802.	6.9	2892.	7.4	2979.	8.0	3064.	8.7
1720.	2190.	2621.	6.0	2715.	6.5	2807.	7.1	2895.	7.7	2982.	8.3	3066.	8.9
1840.	2343.	2629.	6.2	2722.	6.8	2813.	7.4	2901.	8.0	2986.	8.6	3070.	9.2
1960.	2496.	2639.	6.5	2731.	7.1	2821.	7.6	2908.	8.3	2993.	8.9	3075.	9.5
2080.	2649.	2650.	6.7	2742.	7.3	2830.	7.9	2917.	8.6	3001.	9.2	3082.	9.8
2200.	2802.	2663.	7.0	2754.	7.6	2842.	8.3	2927.	8.9	3010.	9.5	3091.	10.2
2320.	2954.	2678.	7.3	2767.	8.0	2854.	8.6	2939.	9.2	3021.	9.9	3101.	10.5
2440.	3107.	2693.	7.7	2782.	8.3	2868.	8.9	2952.	9.6	3033.	10.2	3113.	10.9
2560.	3260.	2710.	8.0	2798.	8.6	2883.	9.3	2966.	10.0	3047.	10.6	3126.	11.3
2680.	3413.	2728.	8.3	2815.	9.0	2899.	9.7	2982.	10.3	3062.	11.0	3140.	11.7
2800.	3566.	2747.	8.7	2833.	9.4	2917.	10.0	2998.	10.7	3078.	11.5	3155.	12.2
2920.	3719.	2766.	9.0	2852.	9.7	2935.	10.5	3016.	11.2	3094.	11.9	3172.	12.6
3040.	3871.	2787.	9.4	2872.	10.1	2954.	10.9	3034.	11.6	3113.	12.4	3190.	13.1
3160.	4024.	2808.	9.8	2892.	10.6	2974.	11.3	3055.	12.1	3133.	12.8	3209.	13.6
3280.	4177.	2830.	10.2	2914.	11.0	2996.	11.8	3076.	12.6	3154.	13.4	3229.	14.1
3400.	4330.	2853.	10.6	2937.	11.4	3020.	12.3	3099.	13.1	3176.	13.9	3250.	14.7
3520.	4483.	2877.	11.1	2962.	11.9	3044.	12.8	3116.	13.5	3191.	14.3	3271.	15.2
3640.	4635.	2905.	11.6	2981.	12.3	3061.	13.1	3138.	13.9	3213.	14.8	3286.	15.6
3760.	4788.	2924.	12.0	3005.	12.8	3084.	13.6	3160.	14.5	3235.	15.3	3308.	16.2
3880.	4941.	2948.	12.4	3029.	13.3	3107.	14.1	3184.	15.0	3258.	15.8	3330.	16.7
4000.	5094.	2974.	12.9	3054.	13.8	3132.	14.6	3207.	15.5	3281.	16.4	3353.	17.3

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1480.	1885.												
1600.	2038.	3147.	9.3	3228.	9.9	3307.	10.6						
1720.	2190.	3148.	9.6	3228.	10.2	3307.	10.9	3384.	11.5	3459.	12.2		
1840.	2343.	3151.	9.9	3231.	10.5	3308.	11.2	3385.	11.9	3459.	12.6	3532.	13.3
1960.	2496.	3156.	10.2	3235.	10.8	3312.	11.5	3387.	12.2	3461.	12.9	3534.	13.6
2080.	2649.	3162.	10.5	3240.	11.2	3317.	11.9	3392.	12.6	3465.	13.3	3537.	14.0
2200.	2802.	3170.	10.9	3248.	11.5	3323.	12.2	3398.	12.9	3470.	13.6	3541.	14.4
2320.	2954.	3180.	11.2	3257.	11.9	3332.	12.6	3405.	13.3	3477.	14.0	3548.	14.8
2440.	3107.	3191.	11.6	3267.	12.3	3341.	13.0	3414.	13.8	3486.	14.5	3555.	15.2
2560.	3260.	3203.	12.0	3278.	12.7	3352.	13.5	3424.	14.2	3496.	15.0	3564.	15.7
2680.	3413.	3217.	12.5	3291.	13.2	3365.	13.9	3436.	14.7	3508.	15.5	3575.	16.2
2800.	3566.	3232.	12.9	3306.	13.7	3378.	14.4	3448.	15.1	3518.	15.9	3586.	16.7
2920.	3719.	3248.	13.4	3321.	14.1	3392.	14.9	3462.	15.6	3531.	16.4	3599.	17.2
3040.	3871.	3265.	13.9	3337.	14.6	3408.	15.4	3477.	16.2	3545.	16.9	3613.	17.8
3160.	4024.	3283.	14.4	3354.	15.2	3424.	15.9	3494.	16.7	3561.	17.5	3628.	18.3
3280.	4177.	3302.	14.9	3372.	15.7	3441.	16.5	3513.	17.4	3577.	18.1	3644.	18.9
3400.	4330.	3321.	15.5	3391.	16.2	3459.	17.0	3527.	17.8	3594.	18.7	3661.	19.5
3520.	4483.	3342.	16.0	3410.	16.8	3477.	17.6	3545.	18.4	3612.	19.3	3678.	20.2
3640.	4635.	3362.	16.6	3430.	17.3	3500.	18.2	3565.	19.0	3631.	19.9	3697.	20.8
3760.	4788.	3383.	17.1	3450.	17.9	3517.	18.7	3585.	19.7	3651.	20.6		
3880.	4941.	3405.	17.7	3470.	18.5	3538.	19.4	3606.	20.3	3672.	21.3		
4000.	5094.	3426.	18.3	3494.	19.2	3560.	20.0	3628.	21.0	3694.	22.0		



Impeller Dia. — 20 3/4 in.
 Tip Speed (FPM) — 5.43 x RPM
 Inlet Dia. — 14 in.
 Area — 1.069 sq. ft.
 Outlet Dia. — 12 in.
 Area — .7853 sq. ft.

SIZE
 TBAB 050-150-E

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	19" TP		20" TP		21" TP		22" TP		23" TP		24" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
2400.	3056.	2791.	12.4	2864.	13.1	2934.	13.9	3004.	14.7	3072.	15.5	3138.	16.4
2580.	3286.	2793.	13.0	2864.	13.7	2933.	14.5	3001.	15.4	3068.	16.2	3134.	17.0
2760.	3515.	2798.	13.6	2867.	14.4	2935.	15.2	3002.	16.0	3068.	16.9	3132.	17.7
2940.	3744.	2806.	14.3	2874.	15.1	2941.	15.9	3007.	16.8	3071.	17.6	3135.	18.5
3120.	3973.	2817.	15.0	2884.	15.8	2950.	16.7	3014.	17.6	3077.	18.4	3140.	19.3
3300.	4202.	2831.	15.8	2896.	16.6	2961.	17.5	3024.	18.4	3087.	19.3	3148.	20.2
3480.	4432.	2847.	16.6	2911.	17.5	2975.	18.4	3037.	19.3	3099.	20.2	3159.	21.1
3660.	4661.	2865.	17.5	2928.	18.4	2991.	19.3	3053.	20.2	3113.	21.1	3173.	22.1
3840.	4890.	2884.	18.4	2947.	19.3	3009.	20.2	3070.	21.2	3129.	22.1	3188.	23.1
4020.	5119.	2905.	19.3	2967.	20.2	3029.	21.2	3088.	22.2	3148.	23.2	3206.	24.2
4200.	5349.	2927.	20.2	2989.	21.2	3049.	22.2	3110.	23.3	3169.	24.3	3226.	25.4
4380.	5578.	2949.	21.2	3011.	22.3	3073.	23.4	3132.	24.5	3191.	25.5	3247.	26.6
4560.	5807.	2973.	22.3	3036.	23.4	3097.	24.5	3156.	25.6	3214.	26.7	3270.	27.8
4740.	6036.	2997.	23.4	3061.	24.6	3121.	25.7	3180.	26.9	3237.	28.0	3292.	29.1
4920.	6266.	3022.	24.4	3078.	25.4	3138.	26.6	3197.	27.7	3254.	28.9	3315.	30.3
5100.	6495.	3038.	25.2	3101.	26.5	3161.	27.7	3220.	28.9	3277.	30.1	3338.	31.6
5280.	6724.	3058.	26.2	3122.	27.5	3183.	28.8	3242.	30.0	3299.	31.3	3361.	32.9
5460.	6953.	3077.	27.1	3142.	28.5	3204.	29.9	3264.	31.2	3321.	32.5	3383.	34.1
5640.	7182.	3094.	28.1	3160.	29.5	3224.	30.9	3284.	32.3	3349.	34.1	3404.	35.3
5820.	7412.	3111.	29.1	3176.	30.4	3241.	32.0	3303.	33.5	3368.	35.2	3424.	36.5
6000.	7641.	3119.	29.7	3192.	31.5	3261.	33.2	3325.	34.8	3386.	36.3	3443.	37.7

CFM	OV FT/MIN	25" TP		26" TP		27" TP		28" TP		29" TP		30" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
2400.	3056.	3204.	17.2	3269.	18.1	3324.	19.6	3386.	20.5	3447.	21.4	3506.	22.4
2580.	3286.	3198.	17.9	3262.	18.8	3324.	19.6	3386.	20.5	3447.	21.4	3506.	22.4
2760.	3515.	3196.	18.6	3259.	19.5	3320.	20.4	3381.	21.3	3441.	22.2	3500.	23.2
2940.	3744.	3197.	19.4	3259.	20.3	3319.	21.2	3379.	22.1	3438.	23.0	3496.	24.0
3120.	3973.	3201.	20.2	3262.	21.1	3322.	22.0	3380.	23.0	3439.	23.9	3496.	24.9
3300.	4202.	3209.	21.1	3268.	22.0	3327.	22.9	3385.	23.9	3442.	24.8	3499.	25.9
3480.	4432.	3219.	22.0	3277.	23.0	3335.	23.9	3392.	24.9	3448.	25.9	3504.	26.9
3660.	4661.	3231.	23.0	3289.	24.0	3346.	25.0	3402.	25.9	3457.	26.9	3513.	28.1
3840.	4890.	3246.	24.1	3303.	25.1	3359.	26.1	3414.	27.1	3469.	28.0	3522.	29.0
4020.	5119.	3263.	25.2	3320.	26.2	3375.	27.2	3429.	28.2	3482.	29.2	3535.	30.2
4200.	5349.	3282.	26.4	3338.	27.4	3392.	28.4	3445.	29.4	3498.	30.5	3550.	31.5
4380.	5578.	3303.	27.6	3357.	28.6	3410.	29.7	3463.	30.7	3518.	31.9	3566.	32.8
4560.	5807.	3324.	28.9	3378.	29.9	3430.	30.9	3481.	31.9	3533.	33.0	3585.	34.1
4740.	6036.	3346.	30.1	3399.	31.2	3450.	32.2	3503.	33.4	3553.	34.4	3604.	35.6
4920.	6266.	3369.	31.4	3421.	32.5	3471.	33.5	3523.	34.6	3574.	35.8	3625.	37.0
5100.	6495.	3391.	32.7	3443.	33.8	3493.	34.9	3545.	36.1	3596.	37.3	3647.	38.6
5280.	6724.	3413.	34.0	3464.	35.1	3521.	36.6	3568.	37.5	3619.	38.8	3670.	40.1
5460.	6953.	3435.	35.3	3486.	36.4	3539.	37.7	3591.	39.0	3643.	40.4	3694.	41.7
5640.	7182.	3456.	36.5	3513.	38.0	3562.	39.1	3615.	40.5	3667.	42.0	3718.	43.4
5820.	7412.	3477.	37.8	3531.	39.1	3585.	40.6	3638.	42.1	3690.	43.6		
6000.	7641.	3498.	39.1	3553.	40.5	3607.	42.1	3661.	43.6	3714.	45.2		

Impeller Dia. — 25 1/4 in.
 Tip Speed (FPM) — 6.61 x RPM
 Inlet Dia. — 10 in.
 Area — .5454 sq. ft.
 Outlet Dia. — 6 in.
 Area — .1963 sq. ft.

SIZE
 TBAB 060-250-B

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	26" TP		28" TP		30" TP		32" TP		34" TP		36" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
320.	1630.	2802.	3.3	2909.	3.6	3013.	4.0	3113.	4.3	3210.	4.7	3304.	5.1
344.	1752.	2799.	3.4	2905.	3.7	3008.	4.1	3108.	4.5	3204.	4.8	3298.	5.2
368.	1875.	2797.	3.5	2903.	3.9	3005.	4.2	3104.	4.6	3200.	4.9	3293.	5.3
392.	1997.	2796.	3.6	2901.	4.0	3002.	4.3	3101.	4.7	3196.	5.1	3289.	5.5
416.	2119.	2797.	3.7	2900.	4.1	3001.	4.5	3099.	4.8	3194.	5.2	3286.	5.6
440.	2241.	2799.	3.9	2901.	4.2	3001.	4.6	3098.	5.0	3192.	5.3	3284.	5.7
464.	2364.	2802.	4.0	2904.	4.3	3002.	4.7	3099.	5.1	3192.	5.5	3283.	5.9
488.	2486.	2806.	4.1	2907.	4.5	3005.	4.9	3100.	5.2	3193.	5.6	3283.	6.0
512.	2608.	2812.	4.2	2912.	4.6	3009.	5.0	3103.	5.4	3195.	5.8	3285.	6.2
536.	2730.	2818.	4.4	2918.	4.8	3014.	5.2	3107.	5.6	3198.	6.0	3287.	6.4
560.	2853.	2826.	4.5	2925.	4.9	3020.	5.3	3113.	5.7	3203.	6.1	3291.	6.6
584.	2975.	2835.	4.7	2933.	5.1	3027.	5.5	3119.	5.9	3209.	6.3	3296.	6.7
608.	3097.	2845.	4.9	2942.	5.3	3035.	5.7	3126.	6.1	3215.	6.5	3302.	6.9
632.	3219.	2856.	5.0	2952.	5.4	3045.	5.8	3135.	6.3	3223.	6.7	3309.	7.1
656.	3342.	2868.	5.2	2962.	5.6	3055.	6.0	3144.	6.5	3232.	6.9	3317.	7.3
680.	3464.	2880.	5.4	2974.	5.8	3066.	6.2	3155.	6.7	3241.	7.1	3326.	7.5
704.	3586.	2892.	5.5	2986.	6.0	3077.	6.4	3165.	6.9	3252.	7.3	3336.	7.8
728.	3708.	2905.	5.7	2999.	6.2	3089.	6.6	3177.	7.1	3263.	7.5	3346.	8.0
752.	3831.	2918.	5.9	3012.	6.4	3102.	6.8	3190.	7.3	3275.	7.8	3358.	8.2
776.	3953.	2932.	6.1	3025.	6.5	3115.	7.0	3203.	7.5	3288.	8.0	3370.	8.5
800.	4075.	2945.	6.3	3038.	6.7	3129.	7.2	3216.	7.7	3301.	8.2	3382.	8.7

CFM	OV FT/MIN	38" TP		40" TP		42" TP		44" TP		46" TP		48" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
320.	1630.	3396.	5.4	3486.	5.8	3574.	6.2	3660.	6.6				
344.	1752.	3390.	5.6	3479.	6.0	3567.	6.4	3652.	6.8				
368.	1875.	3384.	5.7	3473.	6.1	3560.	6.5	3645.	6.9				
392.	1997.	3380.	5.8	3468.	6.2	3554.	6.7	3639.	7.1				
416.	2119.	3376.	6.0	3464.	6.4	3550.	6.8	3634.	7.2				
440.	2241.	3373.	6.1	3461.	6.5	3546.	7.0	3630.	7.4	3711.	7.8		
464.	2364.	3372.	6.3	3459.	6.7	3543.	7.1	3626.	7.5	3708.	8.0		
488.	2486.	3371.	6.5	3458.	6.9	3542.	7.3	3624.	7.7	3705.	8.2		
512.	2608.	3372.	6.6	3458.	7.0	3541.	7.5	3623.	7.9	3703.	8.4		
536.	2730.	3374.	6.8	3459.	7.2	3542.	7.7	3623.	8.1	3703.	8.5		
560.	2853.	3377.	7.0	3461.	7.4	3544.	7.8	3624.	8.3	3703.	8.8		
584.	2975.	3381.	7.2	3465.	7.6	3546.	8.0	3626.	8.5	3705.	9.0		
608.	3097.	3387.	7.4	3469.	7.8	3550.	8.3	3630.	8.7	3707.	9.2		
632.	3219.	3393.	7.6	3475.	8.0	3555.	8.5	3634.	8.9	3711.	9.4		
656.	3342.	3400.	7.8	3481.	8.2	3561.	8.7	3639.	9.2				
680.	3464.	3408.	8.0	3489.	8.5	3568.	8.9	3646.	9.4				
704.	3586.	3418.	8.2	3497.	8.7	3576.	9.2	3653.	9.6				
728.	3708.	3427.	8.5	3507.	8.9	3584.	9.4	3661.	9.9				
752.	3831.	3438.	8.7	3518.	9.2	3594.	9.7	3670.	10.2				
776.	3953.	3449.	8.9	3530.	9.5	3604.	9.9	3680.	10.4				
800.	4075.	3461.	9.2	3538.	9.7	3615.	10.2	3690.	10.7				



Impeller Dia. — 25 1/4 in.
 Tip Speed (FPM) — 6.61 x RPM
 Inlet Dia. — 10 in.
 Area — .5454 sq. ft.
 Outlet Dia. — 6 in.
 Area — .1963 sq. ft.

SIZE
 TBAB 061-251

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	48" TP		50" TP		52" TP		54" TP		56" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
200.	1019.	3816.	6.1	3896.	6.5	3974.	6.8	4051.	7.2	4127.	7.6
250.	1273.	3800.	6.4	3879.	6.7	3958.	7.1	4035.	7.5	4110.	7.9
300.	1528.	3785.	6.6	3865.	7.0	3943.	7.4	4020.	7.8	4095.	8.2
350.	1783.	3773.	6.9	3852.	7.3	3930.	7.7	4007.	8.1	4082.	8.5
400.	2037.	3763.	7.2	3842.	7.6	3920.	8.0	3996.	8.4	4071.	8.9
450.	2292.	3756.	7.5	3834.	7.9	3911.	8.4	3987.	8.8	4062.	9.2
500.	2546.	3751.	7.8	3829.	8.3	3905.	8.7	3981.	9.1	4055.	9.6
550.	2801.	3748.	8.2	3826.	8.6	3902.	9.1	3977.	9.5	4050.	10.0
600.	3056.	3748.	8.5	3825.	9.0	3901.	9.4	3975.	9.9	4048.	10.4
650.	3310.	3751.	8.9	3827.	9.4	3902.	9.8	3976.	10.3	4048.	10.8
700.	3565.	3756.	9.3	3832.	9.8	3906.	10.3	3979.	10.7	4051.	11.2
750.	3820.	3765.	9.8	3839.	10.2	3913.	10.7	3985.	11.2	4056.	11.7
800.	4074.	3777.	10.2	3849.	10.7	3922.	11.2	3994.	11.7	4064.	12.2
850.	4329.	3792.	10.7	3862.	11.2	3934.	11.7	4005.	12.2	4074.	12.7
900.	4584.	3810.	11.3	3877.	11.7	3948.	12.2	4018.	12.7	4087.	13.2
950.	4838.	3825.	11.7	3896.	12.2	3966.	12.7	4035.	13.3	4103.	13.8
1000.	5093.	3846.	12.3	3916.	12.8	3985.	13.3	4053.	13.9	4121.	14.4
1050.	5348.	3870.	12.9	3939.	13.4	4007.	13.9	4075.	14.5	4141.	15.1
1100.	5602.	3897.	13.5	3965.	14.0	4032.	14.6	4098.	15.2	4164.	15.7
1150.	5857.	3925.	14.1	3993.	14.7	4059.	15.3	4124.	15.9	4189.	16.4
1200.	6112.	3955.	14.8	4023.	15.4	4088.	16.0	4153.	16.6	4216.	17.2
1250.	6366.	3987.	15.5	4055.	16.2	4120.	16.8	4183.	17.4	4246.	18.0
1300.	6621.	4039.	16.6	4092.	17.0	4154.	17.6	4216.	18.2	4278.	18.8
1350.	6875.	4081.	17.5	4129.	17.8	4189.	18.4	4251.	19.0	4311.	19.7

CFM	OV FT/MIN	58" TP		60" TP		62" TP		64" TP		
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	
200.	1019.	4201.	8.0	4274.	8.4	4346.	8.8	4417.	9.2	
250.	1273.	4184.	8.3	4257.	8.7	4329.	9.1	4400.	9.5	
300.	1528.	4169.	8.6	4242.	9.0	4313.	9.5	4384.	9.9	
350.	1783.	4156.	9.0	4228.	9.4	4300.	9.8	4370.	10.2	
400.	2037.	4144.	9.3	4216.	9.7	4288.	10.2	4358.	10.6	
450.	2292.	4135.	9.7	4207.	10.1	4278.	10.6	4347.	11.0	
500.	2546.	4128.	10.0	4199.	10.5	4270.	11.0	4339.	11.4	
550.	2801.	4123.	10.4	4194.	10.9	4264.	11.4	4333.	11.8	
600.	3056.	4120.	10.8	4191.	11.3	4261.	11.8	4329.	12.3	
650.	3310.	4120.	11.3	4190.	11.8	4259.	12.2	4328.	12.7	
700.	3565.	4122.	11.7	4192.	12.2	4260.	12.7	4328.	13.2	
750.	3820.	4127.	12.2	4196.	12.7	4264.	13.2	4331.	13.7	
800.	4074.	4134.	12.7	4202.	13.2	4270.	13.7	4336.	14.3	
850.	4329.	4143.	13.2	4211.	13.7	4278.	14.3	4344.	14.8	
900.	4584.	4155.	13.8	4222.	14.3	4289.	14.9	4354.	15.4	
950.	4838.	4170.	14.4	4236.	14.9	4302.	15.5	4366.	16.0	
1000.	5093.	4187.	15.0	4252.	15.5	4317.	16.1	4381.	16.7	
1050.	5348.	4206.	15.6	4271.	16.2	4335.	16.8	4398.	17.3	
1100.	5602.	4228.	16.3	4292.	16.9	4355.	17.5			
1150.	5857.	4253.	17.0	4316.	17.6	4378.	18.2			
1200.	6112.	4279.	17.8	4341.	18.4					
1250.	6366.	4308.	18.6	4369.	19.2					
1300.	6621.	4339.	19.4	4399.	20.0					
1350.	6875.	4372.	20.3							

Impeller Dia. — 25 1/2 in.
 Tip Speed (FPM) — 6.67 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 8 in.
 Area — .3491 sq. ft.

SIZE
 TBAB 070-270-C

All capacities based on air density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	26" TP		28" TP		30" TP		32" TP		34" TP		36" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
740.	2120.	2713.	5.4	2816.	6.0	2916.	6.5	3013.	7.0	3107.	7.6	3199.	8.1
796.	2279.	2709.	5.7	2812.	6.2	2911.	6.7	3007.	7.3	3100.	7.8	3191.	8.4
851.	2438.	2708.	5.9	2809.	6.4	2907.	7.0	3002.	7.5	3095.	8.1	3185.	8.7
907.	2597.	2708.	6.2	2808.	6.7	2905.	7.3	2999.	7.8	3091.	8.4	3180.	9.0
962.	2756.	2712.	6.4	2810.	7.0	2905.	7.5	2998.	8.1	3089.	8.7	3177.	9.3
1018.	2915.	2718.	6.7	2814.	7.3	2908.	7.8	3000.	8.4	3089.	9.0	3176.	9.6
1073.	3074.	2726.	7.0	2821.	7.6	2913.	8.2	3003.	8.8	3091.	9.4	3177.	10.0
1129.	3234.	2737.	7.3	2830.	7.9	2921.	8.5	3009.	9.1	3096.	9.7	3181.	10.4
1184.	3393.	2752.	7.7	2842.	8.3	2931.	8.9	3018.	9.5	3103.	10.1	3186.	10.8
1240.	3552.	2768.	8.1	2857.	8.7	2943.	9.3	3029.	9.9	3112.	10.5	3194.	11.2
1295.	3711.	2788.	8.4	2874.	9.1	2959.	9.7	3042.	10.3	3124.	11.0	3204.	11.6
1351.	3870.	2811.	8.9	2894.	9.5	2977.	10.1	3058.	10.8	3138.	11.4	3217.	12.1
1406.	4029.	2836.	9.3	2917.	10.0	2998.	10.6	3077.	11.2	3156.	11.9	3233.	12.6
1462.	4188.	2863.	9.8	2943.	10.4	3023.	11.1	3101.	11.8	3177.	12.5	3252.	13.2
1517.	4347.	2898.	10.4	2976.	11.1	3053.	11.7	3128.	12.4	3201.	13.1	3274.	13.7
1573.	4506.	2925.	10.9	3000.	11.5	3074.	12.2	3147.	12.8	3220.	13.5	3298.	14.4
1628.	4665.	2961.	11.5	3033.	12.1	3105.	12.8	3176.	13.4	3246.	14.1	3316.	14.8
1684.	4824.	3001.	12.2	3070.	12.8	3138.	13.4	3207.	14.1	3275.	14.8	3343.	15.5
1739.	4983.	3035.	12.7	3110.	13.5	3175.	14.1	3241.	14.8	3306.	15.5	3372.	16.2
1795.	5142.	3080.	13.5	3143.	14.1	3216.	14.9	3277.	15.6	3340.	16.2	3411.	17.1
1850.	5301.	3120.	14.2	3188.	14.9	3247.	15.5	3317.	16.4	3375.	17.0	3440.	17.8

CFM	OV FT/MIN	38" TP		40" TP		42" TP		44" TP		46" TP		48" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
740.	2120.	3288.	8.7	3375.	9.3	3459.	9.9	3542.	10.5	3623.	11.1	3702.	11.7
796.	2279.	3279.	9.0	3366.	9.6	3450.	10.2	3532.	10.8	3613.	11.4	3691.	12.0
851.	2438.	3273.	9.3	3358.	9.9	3442.	10.5	3524.	11.1	3604.	11.8	3682.	12.4
907.	2597.	3267.	9.6	3352.	10.2	3435.	10.8	3516.	11.5	3596.	12.1	3674.	12.8
962.	2756.	3263.	9.9	3348.	10.6	3430.	11.2	3510.	11.8	3589.	12.5	3667.	13.1
1018.	2915.	3261.	10.3	3345.	10.9	3426.	11.5	3506.	12.2	3584.	12.9	3661.	13.5
1073.	3074.	3261.	10.6	3344.	11.3	3424.	11.9	3504.	12.6	3581.	13.2	3657.	13.9
1129.	3234.	3264.	11.0	3345.	11.7	3425.	12.3	3503.	13.0	3579.	13.7	3655.	14.4
1184.	3393.	3268.	11.4	3348.	12.1	3427.	12.7	3504.	13.4	3580.	14.1	3654.	14.8
1240.	3552.	3274.	11.8	3353.	12.5	3431.	13.2	3507.	13.9	3582.	14.6	3655.	15.3
1295.	3711.	3283.	12.3	3361.	13.0	3437.	13.6	3512.	14.3	3586.	15.0	3659.	15.8
1351.	3870.	3295.	12.8	3371.	13.5	3446.	14.1	3520.	14.8	3592.	15.6	3664.	16.3
1406.	4029.	3309.	13.3	3384.	14.0	3457.	14.6	3529.	15.4	3601.	16.1	3671.	16.8
1462.	4188.	3326.	13.8	3398.	14.5	3470.	15.2	3541.	15.9	3611.	16.7	3681.	17.4
1517.	4347.	3345.	14.4	3415.	15.1	3488.	15.9	3555.	16.5	3624.	17.2	3693.	18.0
1573.	4506.	3366.	15.0	3434.	15.7	3502.	16.4	3571.	17.1	3640.	17.9	3707.	18.7
1628.	4665.	3389.	15.6	3454.	16.3	3522.	17.0	3590.	17.8	3657.	18.6		
1684.	4824.	3414.	16.3	3480.	17.0	3545.	17.7	3612.	18.5	3678.	19.3		
1739.	4983.	3440.	16.9	3503.	17.6	3570.	18.4	3636.	19.3	3702.	20.1		
1795.	5142.	3466.	17.6	3533.	18.4	3599.	19.3	3657.	19.9				
1850.	5301.	3499.	18.4	3566.	19.3	3623.	19.9	3685.	20.7				



Impeller Dia. — 25 1/2 in.
 Tip Speed (FPM) — 6.67 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 8 in.
 Area — .3491 sq. ft.

SIZE
 TBAB 071-271-E

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	48" TP		50" TP		52" TP		54" TP		56" TP		58" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
880.	2521.	3664.	14.0	3742.	14.8	3818.	15.6	3893.	16.5				
946.	2711.	3651.	14.2	3729.	15.0	3804.	15.9	3879.	16.7	3952.	17.6	4024.	18.4
1012.	2900.	3639.	14.5	3716.	15.3	3791.	16.1	3865.	16.9	3938.	17.8	4010.	18.7
1078.	3089.	3630.	14.8	3706.	15.6	3780.	16.4	3853.	17.2	3925.	18.1	3996.	18.9
1144.	3278.	3623.	15.1	3698.	15.9	3771.	16.7	3844.	17.6	3915.	18.4	3985.	19.3
1210.	3467.	3620.	15.5	3694.	16.3	3766.	17.1	3837.	17.9	3907.	18.8	3976.	19.6
1276.	3656.	3622.	16.0	3693.	16.8	3764.	17.6	3834.	18.4	3903.	19.2	3971.	20.1
1342.	3845.	3627.	16.5	3697.	17.3	3766.	18.1	3834.	18.9	3902.	19.7	3969.	20.6
1408.	4034.	3637.	17.1	3705.	17.9	3772.	18.7	3839.	19.5	3905.	20.3	3970.	21.1
1474.	4223.	3651.	17.7	3717.	18.5	3783.	19.3	3848.	20.1	3912.	20.9	3976.	21.8
1540.	4413.	3667.	18.4	3733.	19.2	3797.	20.0	3860.	20.8	3923.	21.6	3986.	22.5
1606.	4602.	3688.	19.2	3752.	20.0	3815.	20.8	3877.	21.6	3938.	22.4	3999.	23.2
1672.	4791.	3712.	20.0	3774.	20.8	3835.	21.6	3896.	22.4	3956.	23.2	4016.	24.1
1738.	4980.	3737.	20.9	3798.	21.7	3859.	22.5	3919.	23.3	3979.	24.2	4037.	25.0
1804.	5169.	3766.	21.8	3827.	22.7	3888.	23.5	3947.	24.4	4004.	25.2	4061.	26.1
1870.	5358.	3797.	22.9	3858.	23.8	3918.	24.6	3976.	25.5	4032.	26.3	4088.	27.2
1936.	5547.	3820.	23.7	3880.	24.6	3939.	25.4	3996.	26.3	4053.	27.1	4116.	28.3
2002.	5736.	3848.	24.7	3908.	25.6	3967.	26.5	4025.	27.3	4081.	28.2	4136.	29.1
2068.	5926.	3874.	25.6	3935.	26.6	3995.	27.5	4053.	28.4	4109.	29.3	4164.	30.3
2134.	6115.	3897.	26.6	3960.	27.6	4021.	28.6	4080.	29.5	4137.	30.5	4193.	31.4
2200.	6304.	3915.	27.5	3982.	28.5	4045.	29.6	4105.	30.6	4164.	31.6	4228.	32.9

CFM	OV FT/MIN	60" TP		62" TP		64" TP		66" TP		68" TP		70" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
880.	2521.												
946.	2711.	4095.	19.3	4164.	20.2								
1012.	2900.	4080.	19.5	4149.	20.4	4218.	21.4	4285.	22.3	4351.	23.2	4416.	24.2
1078.	3089.	4066.	19.8	4135.	20.7	4203.	21.6	4270.	22.5	4336.	23.5	4398.	24.5
1144.	3278.	4054.	20.1	4123.	21.0	4190.	21.9	4256.	22.8	4321.	23.8	4384.	24.7
1210.	3467.	4045.	20.5	4112.	21.4	4178.	22.3	4244.	23.2	4309.	24.1	4372.	25.1
1276.	3656.	4038.	20.9	4104.	21.8	4170.	22.7	4234.	23.6	4298.	24.5	4361.	25.5
1342.	3845.	4035.	21.4	4100.	22.3	4164.	23.2	4228.	24.1	4291.	25.0	4353.	25.9
1408.	4034.	4035.	22.0	4099.	22.8	4162.	23.7	4225.	24.6	4286.	25.5	4348.	26.4
1474.	4223.	4039.	22.6	4102.	23.5	4164.	24.3	4225.	25.2	4285.	26.1	4346.	27.0
1540.	4413.	4047.	23.3	4108.	24.2	4169.	25.0	4229.	25.9	4288.	26.8	4347.	27.7
1606.	4602.	4059.	24.1	4119.	24.9	4178.	25.8	4237.	26.7	4295.	27.6	4352.	28.5
1672.	4791.	4075.	24.9	4133.	25.8	4191.	26.7	4248.	27.5	4305.	28.4	4361.	29.3
1738.	4980.	4095.	25.9	4152.	26.7	4208.	27.6	4264.	28.4	4319.	29.3	4375.	30.3
1804.	5169.	4118.	26.9	4173.	27.8	4228.	28.6	4282.	29.4	4335.	30.3	4393.	31.4
1870.	5358.	4143.	28.0	4197.	28.8	4250.	29.7	4303.	30.5	4355.	31.3	4408.	32.2
1936.	5547.	4170.	29.1	4222.	30.0	4274.	30.8	4325.	31.6	4380.	32.6		
2002.	5736.	4198.	30.3	4249.	31.1	4300.	31.9	4350.	32.7	4401.	33.6		
2068.	5926.	4226.	31.5	4276.	32.3	4326.	33.1	4379.	34.1				
2134.	6115.	4253.	32.6	4303.	33.4	4352.	34.2	4404.	35.2				
2200.	6304.	4280.	33.8	4330.	34.6	4385.	35.7						

Impeller Dia. — 25 1/2 in.
 Tip Speed (FPM) — 6.67 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 10 in.
 Area — .5454 sq. ft.

SIZE
 TBAB 080-290-E

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	28" TP		30" TP		32" TP		34" TP		36" TP		38" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1440.	2641.	2745.	8.9	2840.	9.6	2934.	10.3						
1548.	2839.	2744.	9.4	2838.	10.1	2930.	10.9	3019.	11.6				
1656.	3037.	2748.	10.0	2840.	10.7	2930.	11.5	3017.	12.2	3103.	13.0	3187.	13.8
1764.	3235.	2755.	10.6	2845.	11.3	2933.	12.1	3019.	12.9	3103.	13.7	3185.	14.5
1872.	3433.	2764.	11.2	2853.	12.0	2940.	12.8	3024.	13.6	3107.	14.4	3187.	15.2
1980.	3631.	2777.	11.9	2864.	12.7	2949.	13.5	3032.	14.3	3113.	15.2	3193.	16.0
2088.	3829.	2792.	12.5	2878.	13.4	2961.	14.2	3043.	15.1	3123.	16.0	3201.	16.8
2196.	4027.	2810.	13.3	2894.	14.1	2976.	15.0	3056.	15.9	3135.	16.8	3211.	17.7
2304.	4225.	2829.	14.0	2911.	14.9	2993.	15.8	3072.	16.7	3149.	17.7	3224.	18.6
2412.	4423.	2849.	14.8	2931.	15.7	3011.	16.7	3089.	17.6	3165.	18.6	3240.	19.6
2520.	4621.	2870.	15.6	2952.	16.6	3031.	17.5	3108.	18.5	3184.	19.6	3258.	20.6
2628.	4819.	2892.	16.4	2973.	17.4	3052.	18.5	3130.	19.5	3205.	20.6	3277.	21.6
2736.	5017.	2914.	17.2	2996.	18.3	3076.	19.5	3152.	20.6	3226.	21.6	3298.	22.7
2844.	5215.	2937.	18.1	3020.	19.3	3100.	20.5	3176.	21.6	3249.	22.7	3320.	23.8
2952.	5413.	2960.	19.0	3044.	20.3	3124.	21.5	3193.	22.4	3266.	23.5	3342.	24.9
3060.	5611.	2982.	19.9	3067.	21.2	3140.	22.2	3215.	23.4	3288.	24.6	3364.	26.0
3168.	5810.	3002.	20.7	3081.	21.8	3161.	23.1	3237.	24.4	3311.	25.7	3387.	27.1
3276.	6008.	3019.	21.5	3101.	22.7	3182.	24.1	3259.	25.4	3333.	26.7	3408.	28.2
3384.	6206.	3033.	22.2	3118.	23.5	3201.	25.0	3280.	26.4	3360.	28.1	3430.	29.3
3492.	6404.	3042.	22.8	3137.	24.6	3219.	25.9	3299.	27.4	3380.	29.1	3450.	30.4
3600.	6602.	3047.	23.2	3147.	25.2	3238.	27.0	3321.	28.6	3398.	30.1	3469.	31.5

CFM	OV FT/MIN	40" TP		42" TP		44" TP		46" TP		48" TP		50" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1440.	2641.												
1548.	2839.												
1656.	3037.	3268.	14.6	3348.	15.4	3427.	16.3	3504.	17.1	3579.	17.9	3654.	18.8
1764.	3235.	3266.	15.3	3345.	16.2	3422.	17.0	3498.	17.9	3572.	18.7	3646.	19.6
1872.	3433.	3267.	16.1	3344.	16.9	3420.	17.8	3495.	18.7	3568.	19.6	3640.	20.4
1980.	3631.	3270.	16.9	3347.	17.8	3422.	18.6	3495.	19.5	3567.	20.4	3638.	21.3
2088.	3829.	3277.	17.7	3352.	18.6	3426.	19.5	3498.	20.4	3569.	21.3	3639.	22.3
2196.	4027.	3287.	18.6	3361.	19.5	3433.	20.5	3504.	21.4	3574.	22.3	3643.	23.3
2304.	4225.	3299.	19.5	3371.	20.5	3443.	21.4	3513.	22.4	3582.	23.3	3649.	24.3
2412.	4423.	3313.	20.5	3385.	21.5	3455.	22.5	3525.	23.6	3591.	24.4	3658.	25.4
2520.	4621.	3330.	21.6	3400.	22.5	3469.	23.5	3537.	24.5	3604.	25.5	3670.	26.5
2628.	4819.	3348.	22.6	3417.	23.6	3485.	24.6	3552.	25.6	3618.	26.7	3683.	27.7
2736.	5017.	3368.	23.7	3436.	24.7	3502.	25.7	3568.	26.8	3634.	27.9	3698.	29.0
2844.	5215.	3388.	24.8	3455.	25.8	3524.	27.0	3587.	28.0	3652.	29.1		
2952.	5413.	3410.	26.0	3475.	27.0	3541.	28.1	3606.	29.2	3671.	30.4		
3060.	5611.	3431.	27.1	3496.	28.1	3562.	29.3	3627.	30.5	3692.	31.7		
3168.	5810.	3453.	28.2	3521.	29.5	3584.	30.6	3649.	31.8	3713.	33.1		
3276.	6008.	3474.	29.4	3540.	30.6	3607.	31.9	3672.	33.2				
3384.	6206.	3495.	30.5	3563.	31.8	3630.	33.2	3695.	34.6				
3492.	6404.	3520.	31.8	3586.	33.1	3653.	34.5						
3600.	6602.	3538.	32.8	3608.	34.4	3676.	35.9						



Impeller Dia. — 25 1/2 in.
 Tip Speed (FPM) — 6.67 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 10 in.
 Area — .5454 sq. ft.

Blower Model
 TBAB-081-291-E

Blower Model
 TBAB-081-291-F

SIZE
 TBAB 081-291

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	48" TP		50" TP		52" TP		54" TP		56" TP		58" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1600.	2934.	3624.	20.1	3696.	21.0	3768.	21.9	3838.	22.9	3907.	23.9	3974.	24.9
1720.	3154.	3625.	21.1	3697.	22.1	3767.	23.1	3837.	24.1	3905.	25.1	3972.	26.1
1840.	3374.	3628.	22.3	3700.	23.3	3770.	24.3	3838.	25.3	3906.	26.3	3972.	27.3
1960.	3594.	3634.	23.5	3705.	24.5	3774.	25.6	3842.	26.6	3909.	27.6	3975.	28.7
2080.	3814.	3643.	24.7	3712.	25.8	3781.	26.9	3848.	27.9	3914.	29.0	3980.	30.1
2200.	4034.	3653.	26.0	3722.	27.1	3790.	28.2	3857.	29.4	3922.	30.4	3987.	31.6
2320.	4254.	3665.	27.4	3734.	28.5	3801.	29.7	3867.	30.8	3932.	31.9	3996.	33.1
2440.	4475.	3679.	28.8	3747.	29.9	3813.	31.1	3879.	32.3	3943.	33.5	4006.	34.7
2560.	4695.	3695.	30.2	3762.	31.4	3828.	32.6	3892.	33.8	3956.	35.1	4019.	36.3
2680.	4915.	3711.	31.6	3778.	32.9	3844.	34.1	3908.	35.4	3971.	36.7	4033.	38.0
2800.	5135.	3730.	33.1	3796.	34.4	3861.	35.7	3924.	37.0	3987.	38.3	4049.	39.7
2920.	5355.	3749.	34.6	3814.	35.9	3879.	37.3	3942.	38.7	4004.	40.0	4066.	41.4
3040.	5575.	3769.	36.1	3834.	37.5	3898.	38.9	3961.	40.3	4023.	41.8	4085.	43.3
3160.	5795.	3789.	37.6	3854.	39.0	3918.	40.5	3981.	42.1	4043.	43.6	4104.	45.1
3280.	6015.	3809.	39.0	3874.	40.6	3939.	42.2	4002.	43.8	4064.	45.4	4124.	46.9
3400.	6235.	3830.	40.5	3896.	42.2	3961.	43.9	4023.	45.6	4085.	47.2	4145.	48.8
3520.	6455.	3851.	42.0	3917.	43.8	3982.	45.6	4045.	47.3	4106.	48.9	4166.	50.6
3640.	6675.	3871.	43.5	3938.	45.3	4003.	47.2	4066.	48.9	4127.	50.7	4186.	52.4
3760.	6895.	3890.	44.8	3958.	46.8	4023.	48.7	4086.	50.6	4147.	52.4	4207.	54.2
3880.	7115.	3908.	46.1	3976.	48.2	4042.	50.2	4105.	52.1	4167.	54.0	4227.	55.9
4000.	7335.	3924.	47.3	3993.	49.5	4060.	51.6	4124.	53.6	4186.	55.6	4246.	57.5

CFM	OV FT/MIN	60" TP		62" TP		64" TP		66" TP		68" TP		70" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
1600.	2934.	4041.	25.8	4106.	26.8	4171.	27.8	4234.	28.9	4297.	29.9	4358.	30.9
1720.	3154.	4038.	27.1	4103.	28.1	4167.	29.1	4230.	30.2	4292.	31.2	4353.	32.3
1840.	3374.	4038.	28.4	4102.	29.4	4165.	30.5	4228.	31.5	4289.	32.6	4350.	33.7
1960.	3594.	4040.	29.8	4103.	30.8	4166.	31.9	4228.	33.0	4289.	34.1	4349.	35.2
2080.	3814.	4044.	31.2	4107.	32.3	4169.	33.4	4230.	34.5	4291.	35.6	4350.	36.8
2200.	4034.	4050.	32.7	4113.	33.8	4174.	35.0	4235.	36.1	4295.	37.3	4354.	38.4
2320.	4254.	4058.	34.3	4120.	35.4	4181.	36.6	4241.	37.8	4301.	39.0	4359.	40.1
2440.	4475.	4069.	35.9	4130.	37.1	4190.	38.3	4250.	39.5	4309.	40.7	4367.	41.9
2560.	4695.	4081.	37.5	4141.	38.8	4201.	40.0	4260.	41.3	4319.	42.5	4376.	43.8
2680.	4915.	4094.	39.2	4155.	40.5	4214.	41.8	4273.	43.1	4330.	44.4	4387.	45.7
2800.	5135.	4110.	41.0	4170.	42.4	4228.	43.7	4286.	45.0	4343.	46.3	4399.	47.6
2920.	5355.	4126.	42.8	4186.	44.2	4244.	45.6	4301.	46.9	4358.	48.2	4415.	49.7
3040.	5575.	4145.	44.7	4203.	46.1	4261.	47.5	4318.	48.9	4374.	50.2		
3160.	5795.	4163.	46.6	4222.	48.0	4279.	49.4	4335.	50.8	4390.	52.2		
3280.	6015.	4183.	48.4	4241.	49.9	4298.	51.4	4353.	52.8	4409.	54.4		
3400.	6235.	4203.	50.3	4261.	51.8	4317.	53.3	4372.	54.8				
3520.	6455.	4224.	52.2	4281.	53.8	4337.	55.3	4391.	56.8				
3640.	6675.	4244.	54.0	4301.	55.7	4357.	57.2	4413.	59.0				
3760.	6895.	4265.	55.9	4321.	57.5	4377.	59.2						
3880.	7115.	4285.	57.6	4341.	59.4	4396.	61.0						
4000.	7335.	4304.	59.4	4361.	61.2								

Impeller Dia. — 24 7/8 in.
 Tip Speed (FPM) — 6.51 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 10 in.
 Area — .5454 sq. ft.

Blower Model
 TBAB 090-310-E

SIZE
 TBAB 090-310

Blower Model
 TBAB-090-310-F

All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	28" TP		30" TP		32" TP		34" TP		36" TP		38" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
2000.	3668.	2768.	12.3	2866.	13.2	2961.	14.2						
2150.	3943.	2763.	13.2	2860.	14.1	2954.	15.1	3046.	16.1	3135.	17.1	3221.	18.0
2300.	4218.	2761.	14.0	2857.	15.0	2950.	16.0	3040.	17.1	3128.	18.1	3214.	19.1
2450.	4493.	2761.	14.9	2855.	16.0	2947.	17.0	3037.	18.1	3124.	19.2	3209.	20.2
2600.	4768.	2764.	15.9	2857.	16.9	2947.	18.0	3036.	19.2	3122.	20.3	3205.	21.4
2750.	5043.	2769.	16.8	2861.	18.0	2950.	19.1	3037.	20.3	3122.	21.4	3205.	22.6
2900.	5318.	2777.	17.8	2867.	19.0	2955.	20.2	3040.	21.4	3124.	22.6	3206.	23.8
3050.	5593.	2787.	18.9	2876.	20.1	2962.	21.3	3046.	22.6	3129.	23.8	3209.	25.1
3200.	5868.	2800.	20.0	2887.	21.2	2971.	22.5	3054.	23.8	3135.	25.1	3215.	26.4
3350.	6143.	2815.	21.1	2900.	22.4	2983.	23.7	3065.	25.1	3144.	26.4	3223.	27.7
3500.	6418.	2832.	22.3	2915.	23.7	2997.	25.0	3077.	26.4	3156.	27.8	3233.	29.1
3650.	6693.	2851.	23.5	2933.	24.9	3013.	26.4	3092.	27.8	3169.	29.2	3244.	30.6
3800.	6968.	2873.	24.9	2953.	26.3	3031.	27.7	3108.	29.2	3184.	30.6	3259.	32.2
3950.	7244.	2897.	26.2	2975.	27.7	3051.	29.2	3128.	30.7	3203.	32.3	3276.	33.8
4100.	7519.	2922.	27.7	2999.	29.2	3076.	30.8	3151.	32.4	3224.	34.0	3295.	35.6
4250.	7794.	2952.	29.3	3029.	31.0	3103.	32.7	3176.	34.3	3247.	35.8	3317.	37.4
4400.	8069.	2978.	30.7	3051.	32.3	3123.	33.9	3195.	35.5	3265.	37.2	3340.	39.3
4550.	8344.	3009.	32.4	3081.	34.0	3151.	35.7	3221.	37.3	3289.	39.0	3367.	40.6
4700.	8619.	3043.	34.2	3113.	35.8	3181.	37.5	3249.	39.2	3316.	40.9	3382.	42.5
4850.	8894.	3080.	36.1	3147.	37.8	3213.	39.4	3279.	41.1	3345.	42.8	3409.	44.5
5000.	9169.	3121.	38.3	3184.	39.9	3248.	41.5	3312.	43.2	3375.	44.9	3438.	46.6

CFM	OV FT/MIN	40" TP		42" TP		44" TP		46" TP		48" TP		50" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
2000.	3668.												
2150.	3943.												
2300.	4218.	3298.	20.2										
2450.	4493.	3292.	21.3	3373.	22.4	3452.	23.5	3530.	24.6				
2600.	4768.	3287.	22.5	3368.	23.7	3446.	24.8	3523.	25.9	3598.	27.1	3672.	28.2
2750.	5043.	3286.	23.7	3365.	24.9	3443.	26.1	3519.	27.3	3593.	28.5	3667.	29.7
2900.	5318.	3286.	25.0	3364.	26.2	3441.	27.5	3516.	28.7	3590.	29.9	3663.	31.2
3050.	5593.	3288.	26.3	3366.	27.6	3441.	28.9	3516.	30.1	3589.	31.4	3661.	32.7
3200.	5868.	3293.	27.7	3369.	29.0	3444.	30.3	3518.	31.6	3590.	32.9	3661.	34.3
3350.	6143.	3299.	29.1	3375.	30.4	3449.	31.8	3521.	33.2	3592.	34.5	3662.	35.9
3500.	6418.	3308.	30.5	3382.	31.9	3455.	33.4	3527.	34.7	3597.	36.1	3666.	37.6
3650.	6693.	3319.	32.1	3392.	33.5	3464.	34.9	3535.	36.4	3604.	37.8	3672.	39.3
3800.	6968.	3332.	33.7	3404.	35.2	3475.	36.6	3545.	38.2	3612.	39.5	3680.	41.1
3950.	7244.	3348.	35.4	3418.	36.8	3487.	38.3	3558.	40.1	3623.	41.3	3689.	42.9
4100.	7519.	3365.	37.1	3434.	38.6	3502.	40.1	3569.	41.6	3635.	43.2		
4250.	7794.	3385.	38.9	3452.	40.4	3517.	41.8	3584.	43.5	3650.	45.1		
4400.	8069.	3406.	40.8	3471.	42.2	3536.	43.8	3601.	45.4	3666.	47.1		
4550.	8344.	3429.	42.7	3492.	44.1	3560.	46.2	3620.	47.4	3684.	49.2		
4700.	8619.	3453.	44.7	3513.	46.0	3577.	47.7	3641.	49.6	3704.	51.4		
4850.	8894.	3478.	46.6	3538.	48.1	3601.	49.9	3664.	51.8				
5000.	9169.	3503.	48.6	3563.	50.2	3627.	52.2	3690.	54.3				



Impeller Dia. — 24 7/8 in.
 Tip Speed (FPM) — 6.51 x RPM
 Inlet Dia. — 12 in.
 Area — .7853 sq. ft.
 Outlet Dia. — 10 in.
 Area — .5454 sq. ft.

Blower Model
 TBAB-091-311-G

 Blower Model
 TBAB-091-311-J

SIZE
 TBAB 091-311


All capacities based on air
 density of .0749 lbs./cu. ft.

MHP includes all drive losses


CFM	OV FT/MIN	48" TP		50" TP		52" TP		54" TP		56" TP		58" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
2600.	13242.	3663.	28.4	3739.	29.8	3814.	31.1	3888.	32.5	3960.	33.9	4032.	35.2
2800.	14260.	3663.	30.1	3738.	31.5	3812.	32.9	3885.	34.3	3956.	35.7	4027.	37.2
3000.	15279.	3668.	31.9	3741.	33.3	3814.	34.8	3886.	36.2	3956.	37.7	4026.	39.2
3200.	16297.	3676.	33.9	3748.	35.2	3820.	36.7	3890.	38.2	3960.	39.8	4029.	41.3
3400.	17316.	3689.	36.0	3759.	37.2	3829.	38.8	3899.	40.3	3967.	41.9	4035.	43.5
3600.	18335.	3705.	38.2	3772.	39.4	3842.	41.0	3910.	42.6	3978.	44.2	4045.	45.8
3800.	19353.	3719.	40.0	3789.	41.6	3857.	43.2	3925.	44.9	3991.	46.5	4057.	48.2
4000.	20372.	3740.	42.2	3808.	43.9	3875.	45.6	3942.	47.3	4008.	49.0	4072.	50.7
4200.	21390.	3762.	44.6	3829.	46.3	3896.	48.1	3962.	49.8	4026.	51.6	4090.	53.4
4400.	22409.	3787.	47.1	3853.	48.9	3919.	50.7	3984.	52.5	4048.	54.3	4111.	56.1
4600.	23428.	3813.	49.6	3880.	51.5	3944.	53.4	4008.	55.3	4071.	57.1	4134.	59.0
4800.	24446.	3841.	52.3	3908.	54.3	3972.	56.2	4035.	58.2	4097.	60.1	4158.	62.0
5000.	25465.	3871.	55.0	3938.	57.2	4001.	59.2	4063.	61.2	4125.	63.2	4185.	65.2
5200.	26483.	3916.	59.1	3970.	60.4	4032.	62.3	4093.	64.3	4154.	66.4	4214.	68.4
5400.	27502.	3953.	62.5	4004.	63.6	4064.	65.5	4125.	67.6	4185.	69.7	4244.	71.8
5600.	28521.	3992.	66.1	4039.	66.9	4098.	68.9	4158.	71.0	4217.	73.2	4276.	75.4
5800.	29539.	4033.	69.9	4076.	70.4	4134.	72.4	4193.	74.6	4251.	76.8	4309.	79.1
6000.	30558.	4057.	72.1	4111.	73.8	4170.	76.0	4228.	78.3	4286.	80.6	4344.	82.9
6200.	31576.	4095.	75.7	4168.	79.3	4210.	80.1	4266.	82.1	4323.	84.5	4380.	86.8
6400.	32595.	4134.	79.3	4211.	83.5	4250.	84.1	4322.	88.0	4363.	88.8		
6600.	33614.	4199.	85.5	4234.	85.8	4310.	90.2	4347.	90.7				

CFM	OV FT/MIN	60" TP		62" TP		64" TP		66" TP		68" TP		RPM	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP		
2600.	13242.	4103.	36.7	4172.	38.1	4241.	39.5	4309.	41.0	4376.	42.4		
2800.	14260.	4097.	38.6	4165.	40.1	4233.	41.6	4300.	43.1	4366.	44.6		
3000.	15279.	4095.	40.7	4163.	42.2	4229.	43.7	4296.	45.3	4361.	46.8		
3200.	16297.	4097.	42.8	4163.	44.4	4229.	46.0	4295.	47.6	4359.	49.2		
3400.	17316.	4102.	45.1	4168.	46.7	4233.	48.3	4297.	50.0	4361.	51.6		
3600.	18335.	4110.	47.5	4175.	49.1	4240.	50.8	4303.	52.5	4366.	54.2		
3800.	19353.	4122.	49.9	4186.	51.6	4250.	53.3	4312.	55.1	4374.	56.8		
4000.	20372.	4137.	52.5	4200.	54.2	4262.	56.0	4324.	57.8	4385.	59.6		
4200.	21390.	4154.	55.2	4216.	57.0	4278.	58.8	4339.	60.6	4399.	62.5		
4400.	22409.	4173.	58.0	4235.	59.9	4296.	61.7	4356.	63.6				
4600.	23428.	4195.	60.9	4256.	62.8	4316.	64.8	4376.	66.7				
4800.	24446.	4219.	64.0	4279.	66.0	4339.	67.9	4397.	69.9				
5000.	25465.	4245.	67.2	4304.	69.2	4363.	71.2						
5200.	26483.	4273.	70.5	4332.	72.6	4389.	74.7						
5400.	27502.	4303.	74.0	4360.	76.1								
5600.	28521.	4334.	77.6	4391.	79.8								
5800.	29539.	4366.	81.3										
6000.	30558.	4400.	85.2										
6200.													
6400.													
6600.													


Impeller Dia. — 24 7/8 in.
 Tip Speed (FPM) — 6.51 x RPM
 Inlet Dia. — 14 in.
 Area — 1.069 sq. ft.
 Outlet Dia. — 12 in.
 Area — .7853 sq. ft.

 Blower Model
TBAB-100-330-G

SIZE
TBAB 100-330

 Blower Model
TBAB-100-330-H

All capacities based on air
density of .0749 lbs./cu. ft.

 Blower Model
TBAB-100-330-J

MHP includes all drive losses

CFM	OV FT/MIN	28" TP		30" TP		32" TP		34" TP		36" TP		38" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
3400.	4330.	2762.	23.1	2855.	24.9	2946.	26.8	3035.	28.7	3121.	30.7	3206.	32.7
3655.	4655.	2768.	24.4	2860.	26.3	2949.	28.2	3036.	30.2	3121.	32.2	3204.	34.2
3910.	4979.	2778.	25.7	2868.	27.7	2955.	29.7	3041.	31.7	3125.	33.8	3206.	35.8
4165.	5304.	2790.	27.2	2879.	29.2	2965.	31.3	3049.	33.3	3131.	35.4	3212.	37.6
4420.	5629.	2806.	28.8	2893.	30.8	2978.	32.9	3060.	35.0	3141.	37.2	3220.	39.4
4675.	5954.	2825.	30.5	2910.	32.6	2993.	34.7	3074.	36.9	3154.	39.1	3231.	41.3
4930.	6278.	2846.	32.2	2929.	34.4	3011.	36.6	3091.	38.8	3169.	41.1	3245.	43.3
5185.	6603.	2869.	34.1	2951.	36.3	3032.	38.6	3110.	40.9	3187.	43.2	3262.	45.6
5440.	6928.	2894.	36.1	2975.	38.4	3054.	40.7	3132.	43.0	3208.	45.5	3282.	48.0
5695.	7252.	2920.	38.1	3000.	40.5	3079.	43.0	3157.	45.5	3232.	48.0	3304.	50.5
5950.	7577.	2948.	40.3	3029.	42.9	3108.	45.5	3184.	48.1	3257.	50.6	3328.	53.1
6205.	7902.	2980.	42.9	3061.	45.6	3131.	47.6	3205.	50.1	3278.	52.7	3354.	55.8
6460.	8227.	3005.	44.9	3084.	47.5	3159.	50.1	3233.	52.7	3305.	55.4	3381.	58.7
6715.	8551.	3035.	47.3	3113.	50.1	3188.	52.8	3261.	55.5	3332.	58.2	3408.	61.6
6970.	8876.	3065.	49.9	3143.	52.7	3218.	55.5	3290.	58.3	3361.	61.1	3436.	64.5
7225.	9201.	3095.	52.5	3173.	55.4	3248.	58.3	3320.	61.2	3390.	64.0	3464.	67.5
7480.	9526.	3125.	55.1	3203.	58.2	3278.	61.2	3350.	64.2	3420.	67.1	3491.	70.5
7735.	9850.	3154.	57.9	3233.	61.1	3308.	64.2	3380.	67.3	3458.	71.2	3518.	73.4
7990.	10175.	3181.	60.6	3261.	64.0	3337.	67.2	3410.	70.4	3485.	74.2	3553.	77.3
8245.	10500.	3208.	63.3	3289.	66.9	3366.	70.3	3439.	73.6	3511.	77.1	3579.	80.4
8500.	10825.	3232.	66.0	3315.	69.8	3394.	73.4	3474.	77.7	3540.	80.5	3611.	84.2

CFM	OV FT/MIN	40" TP		42" TP		44" TP		46" TP		48" TP		50" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
3400.	4330.	3288.	34.7	3369.	36.7								
3655.	4655.	3286.	36.3	3365.	38.4	3443.	40.5	3519.	42.6				
3910.	4979.	3286.	38.0	3365.	40.1	3441.	42.3	3517.	44.5	3591.	46.7	3663.	48.9
4165.	5304.	3290.	39.7	3367.	41.9	3443.	44.1	3517.	46.4	3590.	48.7	3661.	51.0
4420.	5629.	3297.	41.6	3373.	43.8	3448.	46.1	3521.	48.4	3592.	50.7	3663.	53.1
4675.	5954.	3307.	43.6	3382.	45.9	3455.	48.2	3527.	50.5	3598.	52.9	3667.	55.3
4930.	6278.	3320.	45.7	3394.	48.1	3466.	50.4	3537.	52.9	3606.	55.2	3674.	57.6
5185.	6603.	3336.	48.0	3408.	50.4	3479.	52.7	3550.	55.4	3617.	57.6	3684.	60.1
5440.	6928.	3355.	50.4	3425.	52.8	3495.	55.2	3563.	57.6	3630.	60.1	3697.	62.7
5695.	7252.	3375.	52.9	3444.	55.3	3512.	57.7	3580.	60.2	3646.	62.8	3712.	65.4
5950.	7577.	3398.	55.5	3465.	57.9	3532.	60.3	3599.	63.0	3664.	65.6		
6205.	7902.	3422.	58.3	3488.	60.6	3558.	63.7	3620.	65.8	3685.	68.6		
6460.	8227.	3447.	61.1	3511.	63.4	3577.	66.1	3643.	68.9	3707.	71.8		
6715.	8551.	3473.	63.9	3537.	66.5	3602.	69.2	3668.	72.1				
6970.	8876.	3499.	66.9	3563.	69.5	3629.	72.5	3694.	75.5				
7225.	9201.	3525.	69.8	3592.	72.8	3658.	76.0						
7480.	9526.	3561.	73.8	3622.	76.3	3688.	79.6						
7735.	9850.	3585.	76.6	3653.	80.0	3712.	82.6						
7990.	10175.	3617.	80.3	3686.	84.0								
8245.	10500.	3650.	84.2	3709.	86.9								
8500.	10825.	3674.	87.2										



Impeller Dia. — 24 1/2 in.
 Tip Speed (FPM) — 6.41 x RPM
 Inlet Dia. — 14 in.
 Area — 1.069 sq. ft.
 Outlet Dia. — 12 in.
 Area — .7853 sq. ft.

SIZE
 TBAB 101-321-J


All capacities based on air density of .0749 lbs./cu. ft.

MHP includes all drive losses

CFM	OV FT/MIN	48" TP		50" TP		52" TP		54" TP		56" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
3600.	4584.	3750.	44.4	3828.	46.9	3906.	49.3	3982.	51.7	4056.	54.1
3850.	4902.	3748.	46.0	3825.	48.5	3902.	50.9	3977.	53.3	4051.	55.8
4100.	5220.	3749.	47.7	3826.	50.2	3901.	52.6	3975.	55.1	4048.	57.6
4350.	5539.	3754.	49.6	3829.	52.0	3903.	54.4	3977.	57.0	4049.	59.5
4600.	5857.	3762.	51.5	3836.	53.9	3909.	56.4	3981.	59.0	4052.	61.6
4850.	6175.	3773.	53.7	3845.	55.9	3917.	58.4	3988.	61.0	4059.	63.7
5100.	6494.	3788.	55.9	3857.	58.0	3928.	60.6	3998.	63.3	4068.	65.9
5350.	6812.	3801.	57.7	3872.	60.3	3942.	62.9	4011.	65.6	4079.	68.3
5600.	7130.	3819.	60.0	3889.	62.6	3958.	65.3	4026.	68.1	4093.	70.8
5850.	7448.	3840.	62.5	3908.	65.2	3977.	67.9	4044.	70.6	4110.	73.4
6100.	7767.	3862.	65.1	3930.	67.8	3997.	70.6	4064.	73.4	4129.	76.2
6350.	8085.	3887.	67.7	3955.	70.6	4021.	73.4	4086.	76.2	4150.	79.1
6600.	8403.	3913.	70.5	3981.	73.5	4046.	76.4	4110.	79.2	4174.	82.2
6850.	8722.	3941.	73.4	4009.	76.5	4073.	79.5	4136.	82.4	4199.	85.4
7100.	9040.	3986.	77.9	4040.	79.8	4102.	82.7	4164.	85.7	4226.	88.7
7350.	9358.	4022.	81.6	4072.	83.2	4133.	86.1	4194.	89.1	4255.	92.2
7600.	9677.	4061.	85.5	4106.	86.8	4165.	89.7	4226.	92.7	4286.	95.9
7850.	9995.	4103.	89.7	4142.	90.6	4199.	93.4	4259.	96.5	4318.	99.7
8100.	10313.	4122.	91.6	4175.	94.1	4234.	97.2	4293.	100.4	4352.	103.6
8350.	10632.	4159.	95.3	4236.	100.5	4275.	101.7	4330.	104.5	4387.	107.7
8600.	10950.	4224.	102.2	4258.	102.7	4335.	108.2	4372.	109.2		
8850.	11268.	4274.	107.2	4301.	107.3	4379.	113.1				


CFM	OV FT/MIN	58" TP		60" TP		62" TP		64" TP		66" TP	
		RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP	RPM	MHP
3600.	4584.	4130.	56.6	4203.	59.1	4274.	61.7	4345.	64.3		
3850.	4902.	4124.	58.4	4196.	60.9	4266.	63.5	4336.	66.1		
4100.	5220.	4120.	60.2	4191.	62.8	4262.	65.4	4331.	68.1	4399.	70.8
4350.	5539.	4120.	62.1	4190.	64.8	4260.	67.4	4328.	70.1	4396.	72.9
4600.	5857.	4123.	64.2	4192.	66.9	4260.	69.6	4328.	72.3	4395.	75.1
4850.	6175.	4128.	66.4	4196.	69.1	4264.	71.8	4331.	74.6	4397.	77.4
5100.	6494.	4136.	68.6	4204.	71.4	4270.	74.2	4336.	77.0		
5350.	6812.	4147.	71.1	4213.	73.8	4279.	76.6	4345.	79.5		
5600.	7130.	4160.	73.6	4226.	76.4	4291.	79.3	4355.	82.2		
5850.	7448.	4176.	76.3	4241.	79.1	4305.	82.0	4368.	84.9		
6100.	7767.	4194.	79.1	4258.	82.0	4321.	84.9	4383.	87.9		
6350.	8085.	4214.	82.0	4277.	85.0	4339.	87.9				
6600.	8403.	4236.	85.1	4298.	88.1	4360.	91.1				
6850.	8722.	4261.	88.4	4322.	91.4	4383.	94.5				
7100.	9040.	4287.	91.8	4347.	94.8						
7350.	9358.	4315.	95.3	4375.	98.4						
7600.	9677.	4345.	99.0								
7850.	9995.	4377.	102.9								

ACCESSORIES

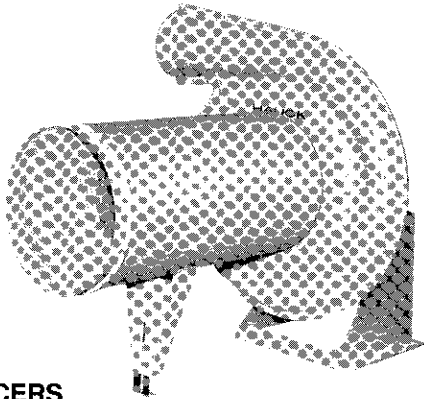

SILENCERS

The Hauck Inlet Silencer is specifically engineered to provide noise attenuation in the 63 Hz to 8,000 Hz frequency range. The design and the construction materials used ensure a long, trouble-free service life. Pressure drop less than 1" w.c. Designed with a studed flange for easy attaching to the blower. (Hauck Bulletin GB157/TBFS.)

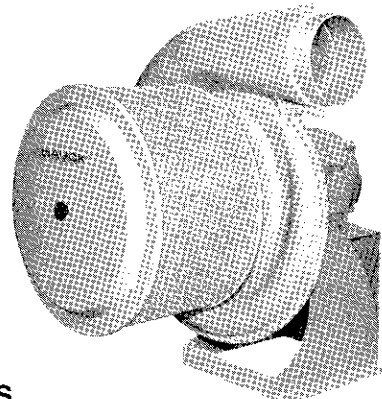


FILTERS

The Hauck Filter is designed for blowers installed in a dirty atmosphere to prevent dirt from being drawn into the blower and air piping system. The use of an inlet filter can often prevent unbalanced impellers and inefficient blower operation. Minimal pressure drop. Compatible with Hauck Silencers. (Hauck Bulletin GB157/TBFS.)




MOTOR STARTERS

Motor starters with thermal overload protection should be used on all blower installations to prevent possible motor damage. Starters include a NEMA 1 general purpose enclosure and can be provided with start-stop push buttons on front cover if required.




BLAST GATES

Blast gates for controlling the air flow from the blower are available for mounting either on the blower inlet or outlet. Outlet blast gates are furnished with a flanged sleeve for connection to the downstream ducting. Inlet blast gates are complete with companion flange, gasket set and necessary fasteners. (Dwgs. GW1567 & GW1569.)

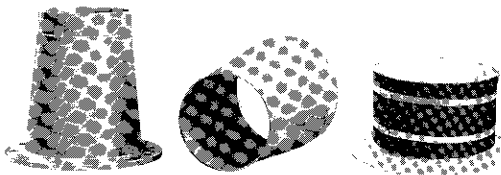

TRANSITIONS, INTAKE ADAPTERS

All sizes and types of transition pieces are available to facilitate connecting the blower outlet to the system piping. The transition inlet is designed to fit the blower sleeve while the outlet is available with flanged, welding, threaded, or straight connections. An inlet adapter is available for applications where outside or "fresh air" must be piped to the blower inlet. Adapter is complete with gasket and necessary fasteners.



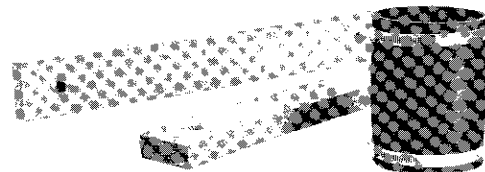


VIBRATION ISOLATORS

Vibration isolation is a necessary part of every blower installation where vibrations caused by other equipment can be transmitted to the blower. A flexible outlet sleeve and clamps are provided with every blower to eliminate these vibration transfers and compensate for ducting misalignment. Cork pads are also provided and should be used when mounting the blower on a floor or base through which vibrations can be transmitted. The use of vibration isolators helps ensure a longer blower life. (Dwg. GV1519.)



HAUK®

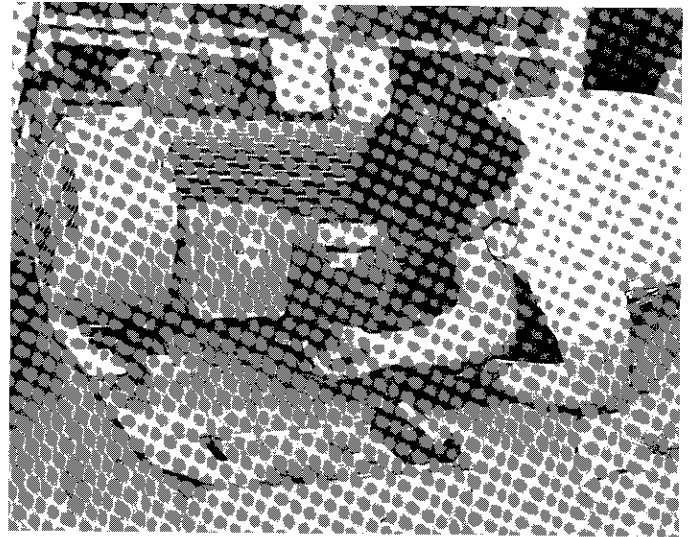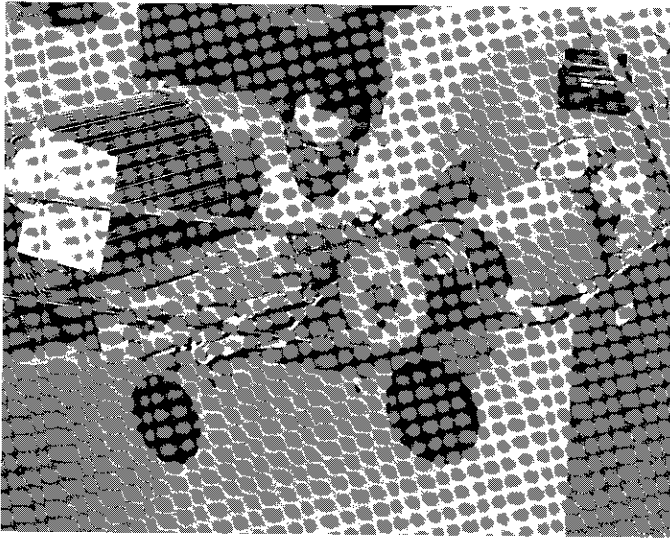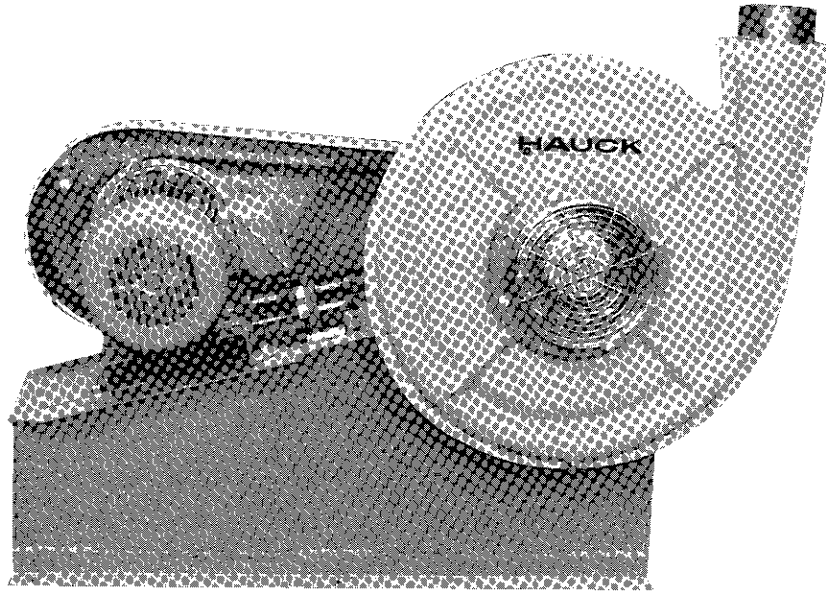



HAUCK MANUFACTURING COMPANY

P.O. Box 90, Lebanon, PA 17042 717-272-3051
Fax: 717-273-9882

In Canada: Thermix, Inc.

Phone: 514-695-0681 Fax: 514-695-1513 (Montreal)
Phone: 519-753-7608 Fax: 519-756-1043 (Brantford)