


Eclipse Comax II Laser Level Gauge

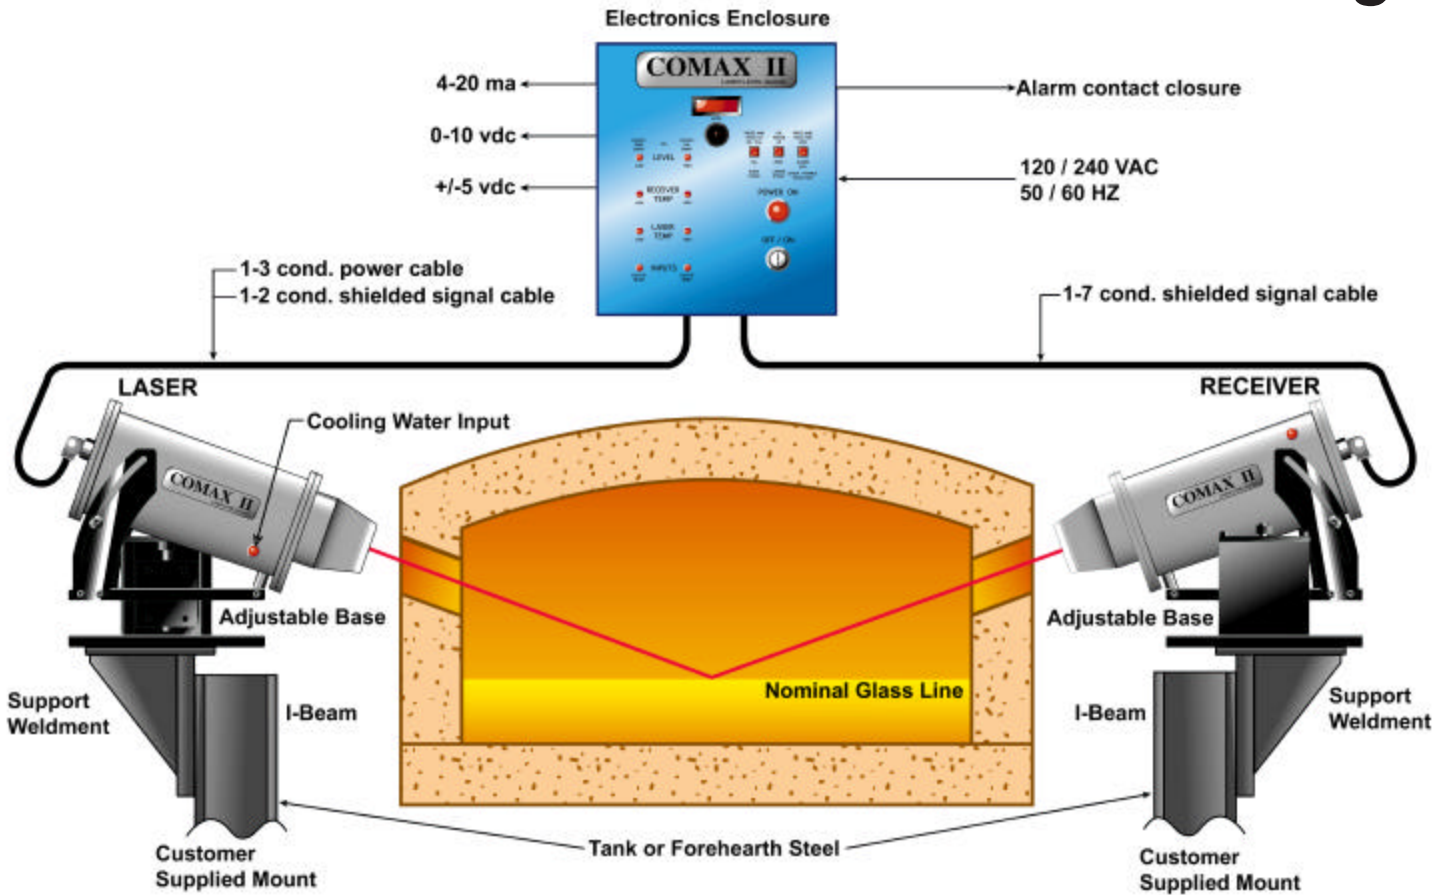

Range	± .50" (± 8mm metric)
Resolution	.001" (.01 mm metric)
Repeatability	±.001" (±.025 mm)
Separation	Up to 25 ft. (7.62 M)
Measurement Angle	10° to 30° recommended
Cooling Water	80°F (27°C) to 120° F (49°C) 2 Gal. (7.6 L) to 5 Gal. (18.9 L) Per minute. 3/8" NPT
Purge Air / Nitrogen	10 PSI, 1/4 " NPT
Ambient Air Temperature	Up to 250° F (121°C)
AC Line Regulation	120 VAC ± 10 VAC 240 VAC ± 20 VAC Transformer Provided for 240 VAC
AC Frequency	50HZ or 60HZ