

HONEYWELL ELSTER MR PN 10

Gas pressure regulator
Inlet pressure 10 bar
DN 25 and DN 50

Applications:

Pressure reduction for:

- District distribution
- Industrial uses

Brief information:

The gas pressure regulator MR 10 bar series is spring loaded and fully inlet pressure balanced. The devices have a standard integrated safety shut-off valve (SSV) and a standard integrated limited capacity relief valve (RV). It opens the range of our MR 6 bar up to 10 bar inlet pressure, which is known for excellent regulation and lock-up behaviour and easy maintenance.

The MR 10 bar series is of use for industrial application and small stations.

The unit is to install direct in the line. An additional sensing line is necessary.

The units are approved by DVGW according to the pressure equipment directive 97/23/EC (PED) and accordance with EN 334 / EN 14382.

Registration Number: CE-0085BM0201.

Technical Data:

- Inlet pressure range p_u : 200 mbar to 10 bar
- Outlet pressure range p_{ds} : 20 mbar to 500 mbar (different setting springs necessary)
- Minimum differential pressure Δp_{min} 50 mbar

Ordering Example:

Gas governor MR 50 SF10 or MR 25 SF10 with over and under pressure shut-off valve (designation "S") and limited capacity relief valve.

- Inlet pressure to mbar
- Outlet pressure mbar
- Over pressure shut-off set mbar
- Under pressure shut-off set mbar
- Relief valve set mbar



Main Features

- Full inlet pressure balanced
- External impulse
- Sizes 25mm & 50mm
- Flange connection PN16
- Inlet pressure resistant up to 16 bar
- Spring loaded
- Excellent outlet pressure control
- Integrated safety shut-off valve (SSV) for over or over and under pressure shut-off
- Integrated limited capacity relief valve (RV)
- Operational temperature -20 °C to +60 °C
- Integrated filter

Options

- Internal impulse up to MR 25: $Q = 80 \text{ m}^3/\text{hr}$
MR 50: $Q = 300 \text{ m}^3/\text{hr}$
- SSV remote indication
- Blocked relief valve

Pressure ranges & accuracy classes for outlet pressure & safety devices

Regulator			Safety shut-off valve				Relief valve	
Set range	Accuracy class	Lock-up pressure class	Over pressure set range	Over pressure accuracy group	Under pressure set range	Under pressure accuracy group	Set range	Accuracy group
mbar	%	%	mbar	%	mbar	%	mbar	%
$P_{ds}20-50$ $P_{ds}50-150$ $P_{ds}150-300$	AC 10 AC 10 AC 5	SG 30 SG 20 SG 10	$p_{ds0}45-900$	AG ₀ 10	$P_{dsu}6-13$ $P_{dsu}13-150$	AG _u 30 AG _u 10	MR 25 20-230 MR 50 20-120 Above outlet pressure p_{ds}	10

MR PN 10




Inlet pressure 10 bar, DN 25 and DN 50

Technical data and dimensions

Type	Capacities natural gas (scmh)			Connections		Dimensions (mm)				Weight (kg) approx
	at Δp 50mbar	$Q_{\max, pu \min}$	$Q_{\max, pu \max}$	Line	Flange	LF	H	H1	D	
MR 25 (S)F10	15	30	400	DN 25	PN16	160	276	134	186	6
MR 50 (S)F10	40	100	1200	DN 50	PN 16	220	480	180	262	13

$Q_{\max, pu \min}$ maximum flow rate at minimum differential pressure Δp_{\min}
 $Q_{\max, pu \max}$ maximum flow rate at maximum differential pressure Δp_{\max}
 Flow Rates $\pm 20\%$ Flange: EN 1092-2

Maximum Capacity

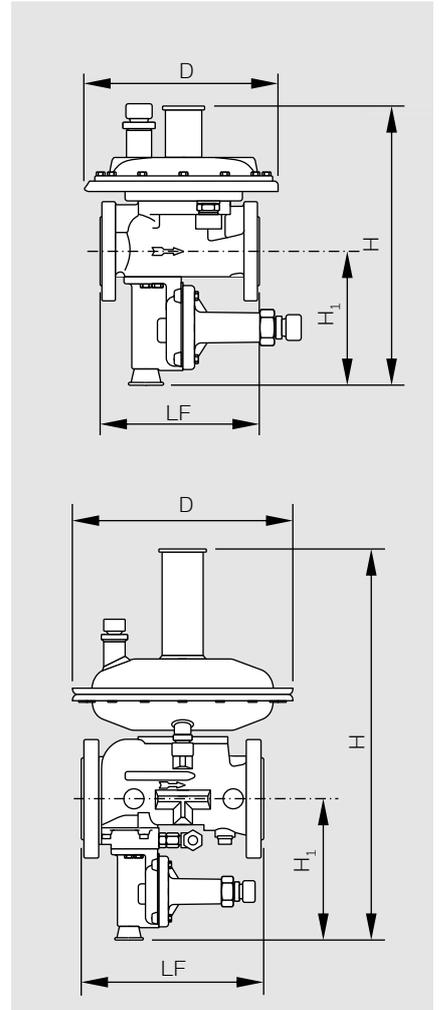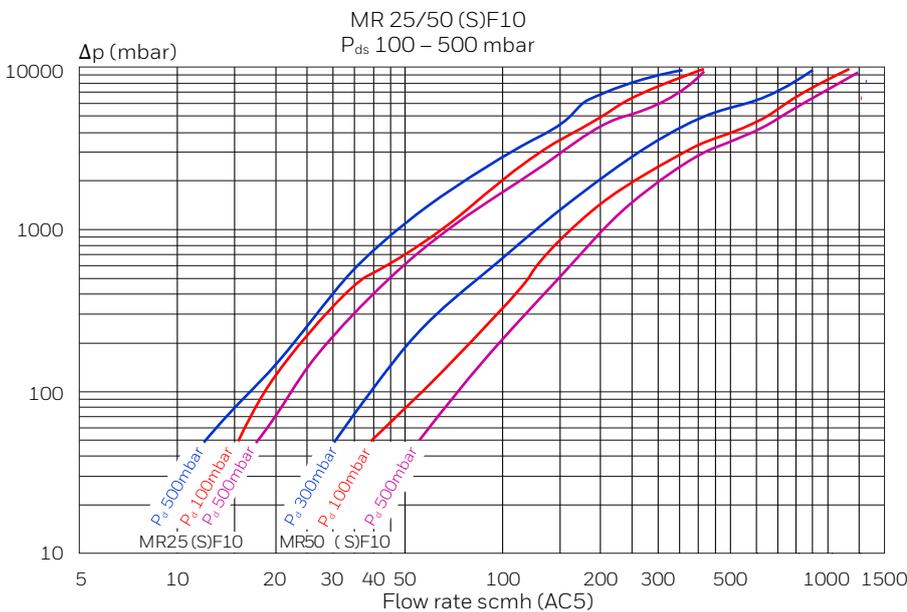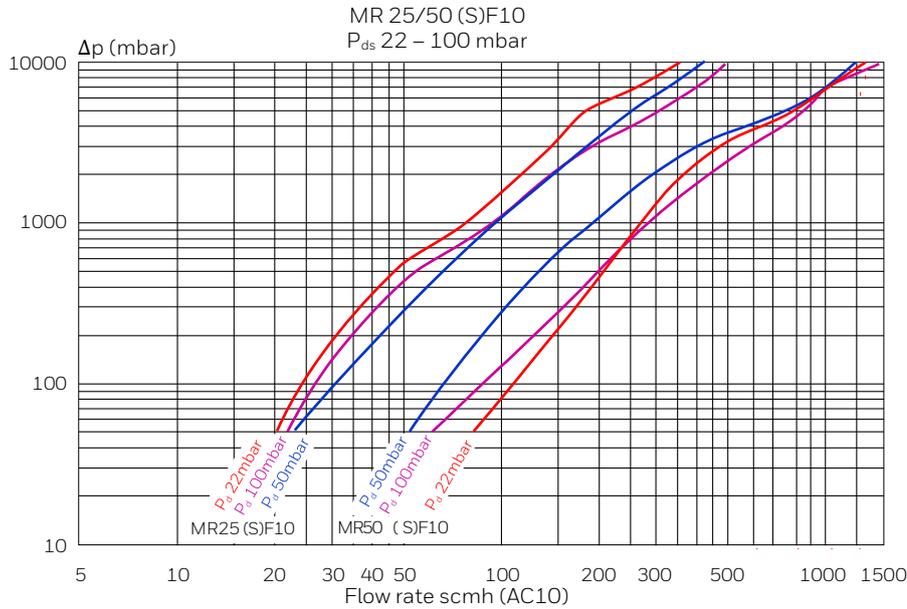

Horizontal installation of the gas regulator

These regulators are suitable for use with previously filtered, non-corrosive gases.

MR PN 6

Inlet Pressure 10 bar, DN 25 and DN 50

Material Specifications

	Regulator	SSV
Body	Spheroidal graphite cast Iron: EN-GJS-400-15	Spheroidal graphite cast iron: EN-GJS-400-15
Covers	Sheet steel	Aluminium alloy
Valve seats (orifices)	Brass	Brass
Valve discs and "O" ring	Nitrile synthetic rubber	Nitrile synthetic rubber
Spindle	Brass / Stainless steel	Stainless steel
Diaphragms	Reinforced nitrile synthetic rubber	Nitrile synthetic rubber
Bearings	Moulded plastic (POM)	Moulded plastic (POM)
Loading springs	Carbon steel, zinc plated and passivated	Carbon steel, zinc plated and passivated

Spring ranges outlet pressure regulator MR 25 (S)F10 [mbar]


Order No.	73008974	73008950	73008975	73017779	73017667	73018630
Adjuster ring	33470005	33470005	33470005	73002114	73009514	73009514
Set range	19 – 32	25 – 50	45 – 70	55 – 130	120 – 300	250 – 500
Colour	Dark Yellow	Light Blue	Blue	Yellow	Dark Grey	Black

Spring ranges outlet pressure regulator MR 50 (S)F10 [mbar]

Order No.	73018431	73018432	73018433	73018434	73018435	73018436	73018437
Set range	20 – 30	25 – 50	45 – 100	90 – 200	150 – 300	250 – 400	350 – 500
Colour	White	Yellow	Green	Blue	Red	Brown	Black

Spring ranges SSV [mbar]

OPSO p_{dso}					
Order No.	73008954	73008955	73008956	73008957	73018496
Adjuster ring	73011076	73011076	73007626	73007626	73007626
p_{dso}	31 – 67	59 – 138	117 – 276	236 – 470	450 – 900
Colour	Orange	White	Light Blue	Yellow	Black
UPSO p_{dsu}					
Order No.	7310871	73008959	73008960		
p_{dsu}	6 – 18	16 – 49	47 – 146		
Colour	Yellow	White	Light Blue		

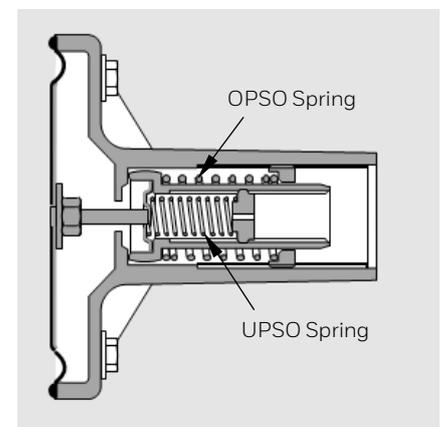

Spring ranges Relief Valve

Order No.	73012343	33470052	73010839
Set range	Set point in mbar above p_{ds}		
MR 25 (S)F10	8 – 90	15 – 125	100 – 230
MR 50 (S)F10	6 – 40	16 – 54	40 – 120

Accessories


Order No.	Description
73018370	Damping Valve
73018985	MR 50 conversion kit for internal impulse regulator and SSV
73018966	Remote indicator SSV
73010710	Vent limiter for SSV (≤ 30 l/h)
73020316	Soft spares kit MR 50 PN10
73020317	Soft spares kit MR 25 PN10

MR PN 10

Inlet Pressure 10 bar, DN 25 and DN 50

Connecting Patterns

Diameters for exhaust pipe	
Length	Min. line diameter
< 3 m	DN 15
3 - 5 m	DN 20
5 - 10 m	DN 25
> 10 m	DN 50

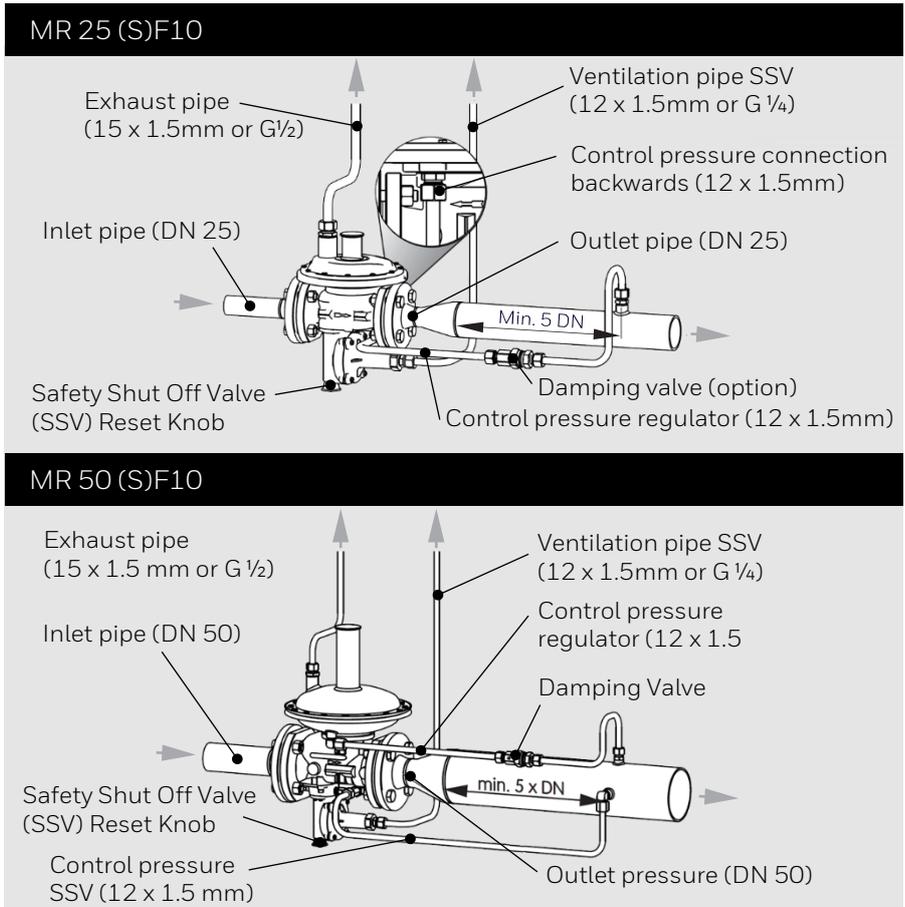

Installation:

- The installation position is preferably horizontal. The outlet pressure is factory set in the horizontal position (referring to the position of the main diaphragm). In case of other installation positions, a subsequent adjustment is required under certain circumstances.
- The devices of the MR PN 10 series are, in general, connected with an external impulse connection (e.g. 12L). Optionally, it is also possible to use the internal pulse up to a flow rate of 300 m³/h (MR 50) or 80 m³/h (MR 25) (ordering option in case of MR 50 or please see accessories for retrofitting).
- The devices having a nominal width

of DN 50 are, in principle, supplied with a damping valve, which shall be installed in the line for the external impulse. In addition, the SSV shut-off valve must be connected – in case of this nominal size – by means of an external impulse line (please observe the operating instructions).

- When connecting an external impulse line, it is absolutely necessary (to ensure that the quality of regulation is maintained) that the downstream line has the same nominal size of the pipe, a minimum length of 5 x DN and consists of a straight piece of pipe. The external impulse can be connected either upstream or

downstream of a possible expansion.

- Any exhaust or ventilation pipes for the gas pressure regulator (15 x 1.5 or G 1/2) and the SSV shut-off valve (12 x 1.5) shall be connected in accordance with the connecting pattern and shall be led out of the housing.
- A vent limiter can be used as an alternative to the ventilation pipe on the SSV (see accessories).
- It is recommended to install a gas filter upstream of the gas pressure regulator.
- In addition, it is necessary to install a valve each upstream and downstream of the gas pressure regulator.

For more information

www.smartenergy.honeywell.com

Honeywell | Smart Energy

Germany
Elster GmbH
Steinern St. 19 – 21
55252 Mainz -Kastel
T +49 6134 605 0
F +49 6134 605 223
customerfirst@honeywell.com

MRPN10EN | 10 | 08/23
© 2023 Honeywell International Inc 73030208

Elster is a registered trade mark
of Honeywell International Inc

Honeywell