

# HONEYWELL ELSTER MR PN 6

Gas pressure regulator  
Inlet pressure 6 bar  
DN 25 and DN 50

## Applications:

Pressure reduction for:

- District distribution
- Industrial uses

## Brief information:

The gas pressure regulator MR 6 bar series is spring loaded and fully inlet pressure balanced. The devices have a standard integrated safety shut-off valve (SSV) and a standard integrated limited capacity relief valve (RV). It is a member of the MR regulator family, which is known for excellent regulation and lock-up behaviour and easy maintenance. The MR 6 bar series is of use for industrial or commercial application and small stations. The units are approved by DVGW according to the pressure equipment directive 97/23/EC (PED) and accordance with EN 334 / EN 14382.

Registration Number: CE-0085BM0201

## Technical Data:

- Inlet pressure range  $p_u$ : 100 mbar to 6 bar
- Outlet pressure range  $p_{ds}$ : 20 mbar to 300 mbar (different setting springs necessary)
- Minimum differential pressure  $\Delta p_{min}$  4 mbar

## Ordering Example:

Gas governor MR 50 SF6 or MR 25 SF6 with over and under pressure shut-off valve (designation "S") and limited capacity relief valve.

- Inlet pressure .... to .... Mbar
- Outlet pressure .... Mbar
- Over pressure shut-off set .... Mbar
- Under pressure shut-off set .... Mbar
- Relief valve set .... mbar



## Main Features

- Full inlet pressure balanced
- Internal impulse up to  
MR 25: Q = 80m<sup>3</sup>/hr  
MR 50: Q = 700 m<sup>3</sup>/hr
- Sizes 25mm & 50mm
- Flange connection PN16 or male thread ISO 228-1
- Inlet pressure resistant up to 16 bar
- Excellent outlet pressure control
- Modular concept
- Integrated safety shut-off valve (SSV) for over or over and under pressure shut-off
- Integrated limited capacity relief valve (RV)
- Operational temperature -20 °C to +60 °C
- Integrated filter

## Options

- External impulse
- SSV remote indication
- Safety diaphragm
- Blocked relief valve
- Special length 200mm (DN 50)

### Pressure ranges & accuracy classes for outlet pressure & safety devices

Regulator			Safety shut-off valve				Relief valve	
Set range	Accuracy class	Lock-up pressure class	Over pressure set range	Over pressure accuracy group	Under pressure set range	Under pressure accuracy group	Set range	Accuracy group
mbar	%	%	mbar	%	mbar	%	mbar	%
$P_{ds}20-100$ $P_{ds}100-300$	AC 10 AC 5	SG 30 SG 20	$p_{dso}45-150$ $p_{dso}150-470$	AG <sub>0</sub> 10 AG <sub>0</sub> 5	$P_{dsu}6-13$ $P_{dsu}13-120$	AG <sub>u</sub> 30 AG <sub>u</sub> 15	MR 25 20-230 MR 50 20-120 Above outlet pressure $p_{ds}$	10

# MR PN 6

Inlet pressure 6 bar, DN 25 and DN 50

## Technical data and dimensions

Type	Capacities natural gas (scmh)			Connections		Dimensions (mm)				Weight (kg) approx
	at $\Delta p$ 50mbar	$Q_{\max, pu \min}$	$Q_{\max, pu \max}$	Line	Flange/Thread	LF/LG	H	H1	D	
MR 25 (S)F6	20*	28*	340*	DN 25	Flange PN16	160	285	134	186	6
MR 25 (S)F-G6	20*	28*	340*	DN 25	PN 16 - G1½	140	285	134	186	5
MR 25 (S)G6	20*	28*	340*	DN 25	G1½	140	285	134	186	4
MR 50 (S)F6	25	90	700	DN 50	Flange PN 16	220 (200)	400	170	262	14.7
MR 50 (S)G6	25	90	700	DN 50	G2¾	220	400	170	262	10.7

\* External impulse at  $p_{ds}$  22 mbar

$Q_{\max, pu \min}$  maximum flow rate at minimum differential pressure  $\Delta p_{\min}$




$Q_{\max, pu \max}$  maximum flow rate at maximum differential pressure  $\Delta p_{\max}$

Flow Rates  $\pm 20\%$

Flange: EN 1092-2

Thread: ISO 228-1

### Maximum Capacity

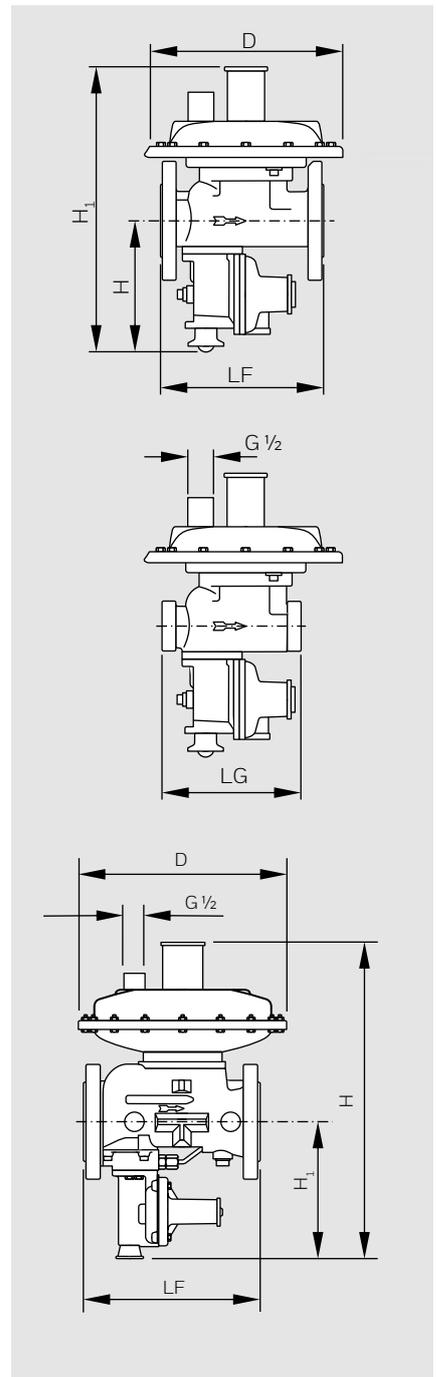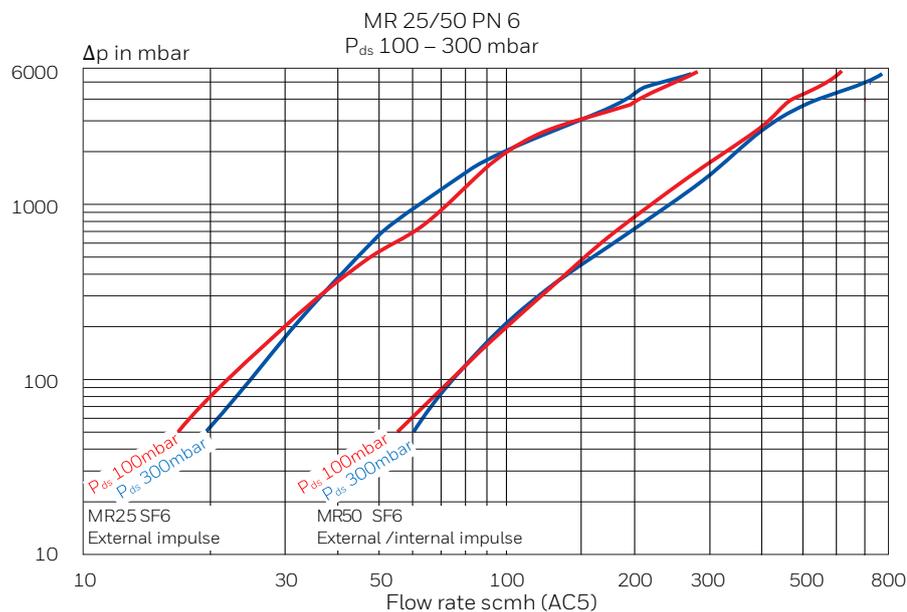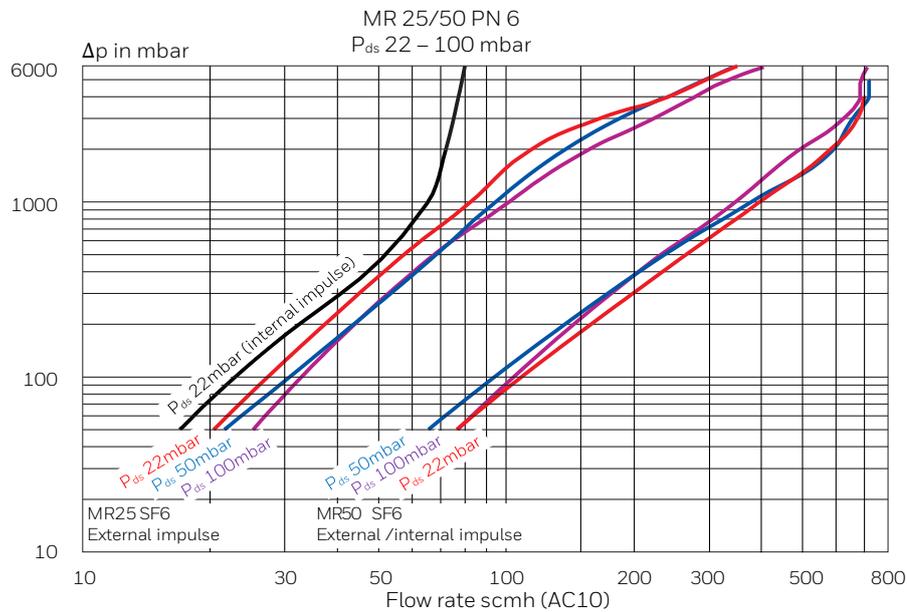

Horizontal installation of the gas regulator

These regulators are suitable for use with previously filtered, non-corrosive gases.

# MR PN 6

Inlet Pressure 6 bar, DN 25 and DN 50

## Material Specifications

	Regulator	SSV
Body	Spheroidal graphite cast Iron: EN-GJS-400-15	Spheroidal graphite cast iron: EN-GJS-400-15
Covers	Sheet steel	Aluminium alloy
Valve seats (orifices)	Brass	Brass
Valve discs and "O" ring	Nitrile synthetic rubber	Nitrile synthetic rubber
Spindle	Brass / Stainless steel	Stainless steel
Diaphragms	Reinforced nitrile synthetic rubber	Nitrile synthetic rubber
Bearings	Moulded plastic (POM)	Moulded plastic (POM)
Loading springs	Carbon steel, zinc plated and passivated	Carbon steel, zinc plated and passivated

## Spring ranges outlet pressure regulator MR 25 [mbar]

Order No.	73008974	73008950	73008975	73017779	73017667
Adjuster ring	33470005	33470005	33470005	73002114	73009514
Set range	19 – 32	25 – 50	45 – 70	55 – 130	120 – 300
Colour	Dark Yellow	Light Blue	Blue	Yellow	Dark Grey

## Spring ranges outlet pressure regulator MR 50 [mbar]

Order No.	33470063	73008998	73008999	73011389	73009287
Set range	20 – 29	26 – 54	50 – 122	66 – 192	150 – 300
Colour	Brown	Blue	Black	None	Blue Grey

## Spring ranges SSV MR 50 [mbar]

OPSO $p_{dso}$					
Order No.	73008954	73008955	73008956	73008957	
Adjuster ring	73011076	73011076	73007626	73007626	
$p_{dso}$	31 – 67	59 – 138	117 – 276	236 – 500	
Colour	Orange	White	Light Blue	Yellow	


UPSO $p_{dsu}$			
Order No.	7310871	73008959	73008960
$p_{dsu}$	6 – 18	16 – 49	47 – 146
Colour	Yellow	White	Light Blue

## Spring ranges SSV MR 25 and MR 50 with USSA [mbar]

OPSO $p_{dso}$						
Order No.	J12506-281	J12506-282	J12506-283	J12506-284	J12506-287	J12506-288
$p_{dso}$	18–60	50–80	60–110	100–210	200–350	280–500
Colour	Black	Orange	Red	Dark Green	Yellow	White

UPSO $p_{dsu}$			
Order No.	J12506-285	J12506-286	J12506-289
$p_{dsu}$	8 – 16	16 – 60	60 – 150
Colour	Light Blue	Brown	Purple

Set points in mbar (set points for horizontal installations).

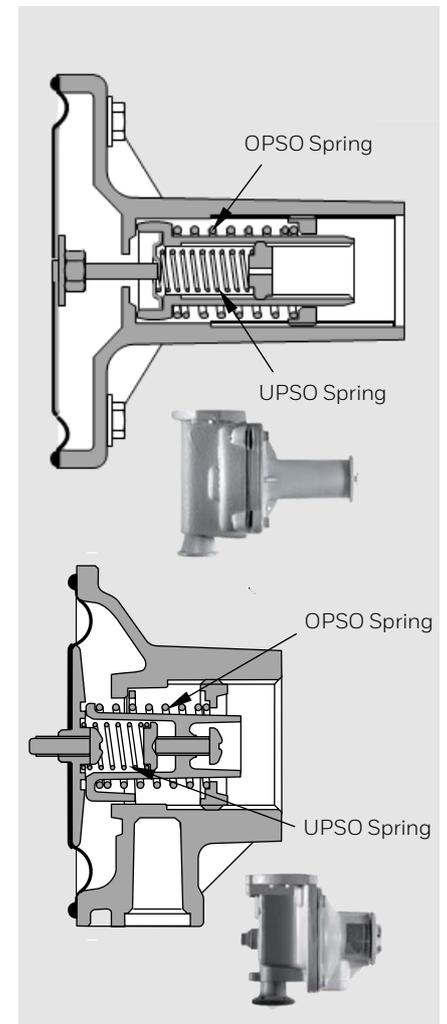

## MR PN 6

Inlet Pressure 6 bar, DN 25 and DN 50

Spring ranges Relief Valve				
Order No.	73012343	33470052	73010839	Order No.
Regulator	Set point in mbar above $p_{ds}$			
MR25 (S)F6	8 – 90	15 – 125	100 – 230	MR25 (S)F6
MR50 (S)F6	6 – 40	16 – 54	40 – 120	MR50 (S)F6

Accessories	
Order No.	Description
73018966	Remote indicator
73019054	Restrictor DV06-1/4"
73021939	Soft spares kit MR50 from 08 2005
73020207	Soft spares kit MR50 until 08 2005
73020206	Soft spares kit MR25


### Connecting Patterns

Diameters for exhaust pipe	
Length	Min. line diameter
< 3 m	DN 15
3 - 5 m	DN 20
5 - 10 m	DN 25
> 10 m	DN 50


#### Installation:

- Any installation position (horizontal, vertical, etc.) can be selected. The outlet pressure is factory set in the horizontal position (referring the position of the main diaphragm). In case of other installation positions, a sub-subsequent adjustment may be required under certain circumstances.
- The devices of the MR PN 6 series are generally equipped with an internal impulse tap. Optionally, an external impulse line can be connected in parallel to the internal impulse (please see the connection patterns above). This may be a required when using quick-acting solenoid valves or for switching capacities  $Q > 40\%$  of  $Q_{max}$  or in the case of control oscillations.
- In case of oscillation in the installation, a separate damping valve DV06 1/4", can be installed in the line for the external impulse (please observe the operating instructions).

#### MR 25 (S)F6

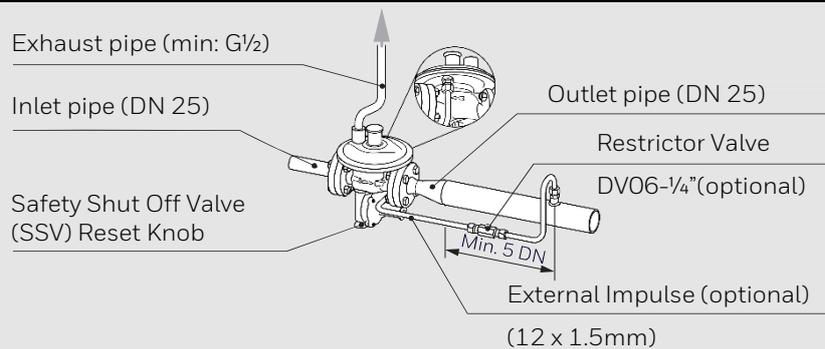

#### MR 50 (S)F6

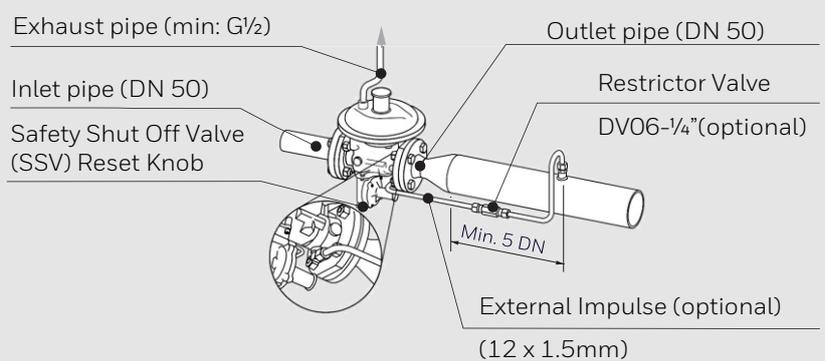

- When connecting an external-impulse line, it is absolutely necessary (to ensure that the quality of regulation is maintained) that the downstream line has the same nominal size of the pipe, a minimum length of 5 x DN and consists of a straight piece of pipe. The external impulse can be connected either upstream or downstream of a possible expansion.
- Exhaust pipe for the gas pressure regulator (G 1/2) shall be sized and connected in accordance with the connecting pattern and shall be led out of the housing.
- It is recommended to install a gas filter upstream of the gas pressure regulator.
- In addition, it is necessary to install a valve each upstream and downstream of the gas pressure regulator.

#### For more information

[www.smartenergy.honeywell.com](http://www.smartenergy.honeywell.com)

#### Honeywell | Smart Energy

Germany  
Elster GmbH  
Steinern St. 19 – 21  
55252 Mainz -Kastel  
T +49 6134 605 0  
F +49 6134 605 223  
customerfirst@honeywell.com

MRPN6EN | 10 | 01/23  
© 2023 Honeywell International Inc

Elster is a registered trade mark  
of Honeywell International Inc

**Honeywell**