



Remote Display

Model 6000D




- LCD backlighting for easier readability
- Contrast adjustment
- Panel door mounting
- 183 or 305 cm (6 or 10 ft.) connecting cables available
- Reset key
- Operates with 6000 Series Multi-Flame or 6500 Series Bi-Flame controllers

This remote display operates with either the 6000 Series Multi-Flame or the 6500 Series Bi-Flame. It is connected to the motherboard by a 15-pin cable which must be purchased separately. This display shows burner sequence, elapsed time and lockout alarm history. The instruction manuals 820 (Multi-Flame) and 826 (Bi-Flame) provide details of the messages.

Specifications

Part Number	15422 (with remote reset and keypad)
Effective Range	Maximum of 10 feet (3 meters) from controller unit
Temperature Range	0° to +60° C (32° to 140° F)
Shipping Weight	0.7 kilograms (1.5 pounds)
Installation Requirements	183 cm (6 ft.) 15-pin connecting cable (Part #15426) or 305 cm (10 ft.) 15-pin connecting cable (Part # 15426-1) <i>Note: Turn off power before inserting or removing cable connectors.</i>

Dimensions

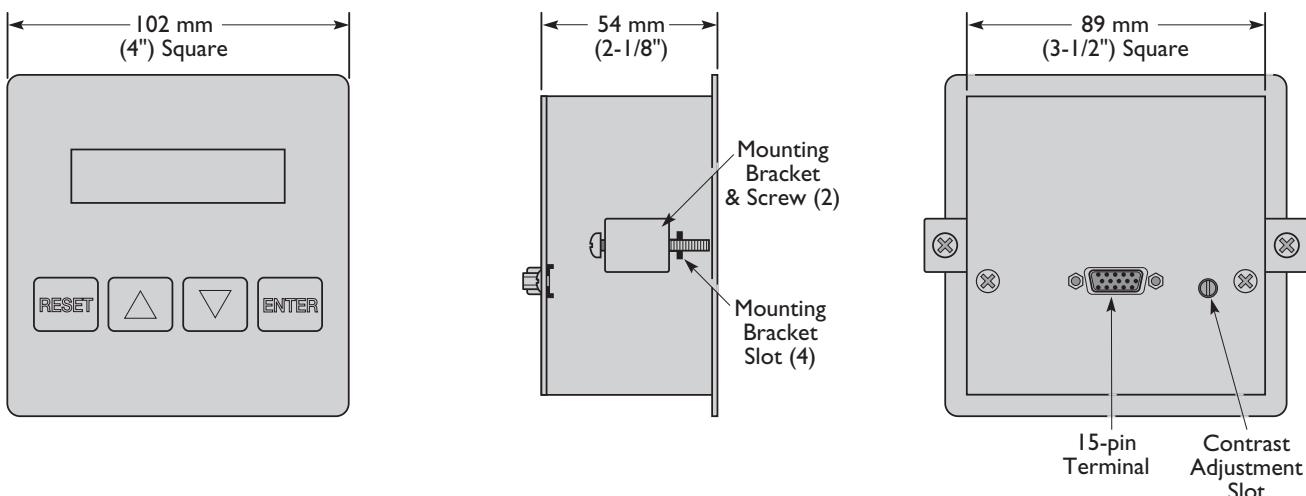



Eclipse Combustion
www.eclipse.net.com