


MR PN 10

Maximum capacity table

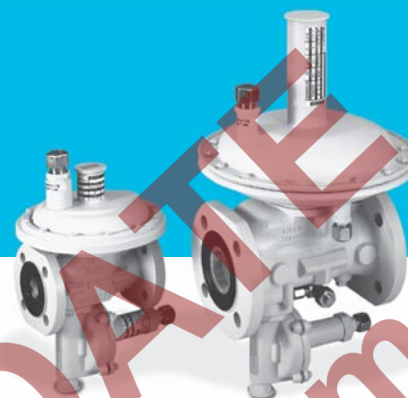

MR 25 PN 10

Outlet pressure [mbar]	Accuracy class	Inlet pressure [mbar]						
		100	500	1000	3000	5000	7000	10000
22	AC10	21	46	77	143	184	261	358
50	AC10	23	63	94	184	252	325	426
100	AC10	-	48	88	187	305	393	494
300	AC10	-	36	65	171	253	363	496
500	AC10	-	-	82	224	344	463	657
100	AC5	-	33	60	126	198	264	423
300	AC5	-	23	39	97	156	194	363
500	AC5	-	-	45	134	209	329	418

Nm³/h

MR 50 PN 10

Outlet pressure [mbar]	Accuracy class	Inlet pressure [mbar]						
		100	500	1000	3000	5000	7000	10000
22	AC10	100	204	266	470	797	1022	1308
50	AC10	52	126	189	409	756	1049	1259
100	AC10	-	177	264	560	835	994	1472
300	AC10	-	97	168	428	726	985	1361
500	AC10	-	-	257	717	1075	1434	1942
100	AC5	-	110	154	352	637	824	1187
300	AC5	-	52	104	246	389	648	907
500	AC5	-	-	149	358	657	896	1270

Nm³/h

Your contacts

Germany
Elster GmbH
Steinern Str. 19 - 21
55252 Mainz-Kastel
T +49 6134 605 0
F +49 6134 605 223
www.elster-instromet.com
info@elster-instromet.com

Belgium
Elster-Instromet N.V.
Rijkmakerlaan 9
2910 Essen
T +32 3 670 0700
F +32 3 667 6940
www.elster-instromet.com
info@elster-instromet.com

Singapore
Elster-Instromet Sdn. Bhd. (Singapore Branch)
160 Paya Lebar Road
#04-01 Orion@Paya Lebar
Singapore 409022
T +65 6247 7728
F +65 6247 7729
sales@elster-instromet.com.sg



MR PN10 MCT EN03

A17.10.2014

Subject to change without prior notice
All rights reserved

73030214